Aklot

INSTRUCTION MANUAL

PLANION SERIES

PLN-7 / PLN-8



7-STRING
25.5–27″

8-STRING
25.5–28″

MULTISCALE DESIGN

24
24 FRETS

2.9mm GLOW SIDE DOTS

H-H PICKUPS

CRAFTED FOR MODERN PLAYERS

PLEASE READ THIS MANUAL CAREFULLY BEFORE USE.

Content

AKLOT Warranty & Support ---------- 1

Content ---------- 2

PACKAGE CONTENTS ---------- 3

PRODUCT SPECIFICATIONS ---------- 4

TUNING GUIDE - 7 STRING ---------- 5

TUNING GUIDE - 8 STRING ---------- 6

STRING INSTALLATION ---------- 7

CONTROL GUIDE ---------- 8

CLEANING & DAILY MAINTENANCE ---------- 9

NECK RELIEF / TRUSS ROD ADJUSTMENT ---------- 10


ACTION & INTONATION ---------- 11

HARDWARE CARE / STRING REPLACEMENT TIPS ---------- 12


SAFETY PRECAUTIONS ---------- 13

TROUBLESHOOTING ---------- 14


PACKAGE CONTENTS



PLN SERIES GUITAR




PREMIUM BIG BAG




ADJUSTABLE STRAP



INSTRUCTION MANUAL



ADJUSTMENT TOOLS
（ALLEN WRENCHES）



INSTRUMENT CABLE



STRING DAMPER

PRODUCT SPECIFICATIONS


Model	AKLOT PLN Series
Type	7-String / 8-String Fan-Fret Electric Guitar
Scale Length	7-String: 25.5" - 27.8" /8-String: 25.5" - 28.2"
Body	Lightweight Ash / Okoume Body, depending on finish
Top Veneer	Burl Maple Top, depending on model
Neck	Roasted Maple with Dual Carbon Fiber Reinforcement
Neck Joint	5-Bolt Bolt-On Neck
Fingerboard	Rosewood
Frets	24 Stainless Steel Frets
Nut	Black Bone Nut
Tuners	1:18 Die-Cast Tuners
Pickups	Angled Dual Humbuckers
Controls	1 Volume /1 Tone /3-Way Selector Switch
Bridge	Black Through-Body Fixed Bridge
Strings	7-String:.010-.059/8-String:.010-.074
Hardware Finish	Black

TUNING GUIDE - 7 STRING

HIGHEST PITCH (THINNEST)

E4	1
B3	2
G3	3
D3	4
A2	5
E2	6
B1	7

LOWEST PITCH (THICKEST)

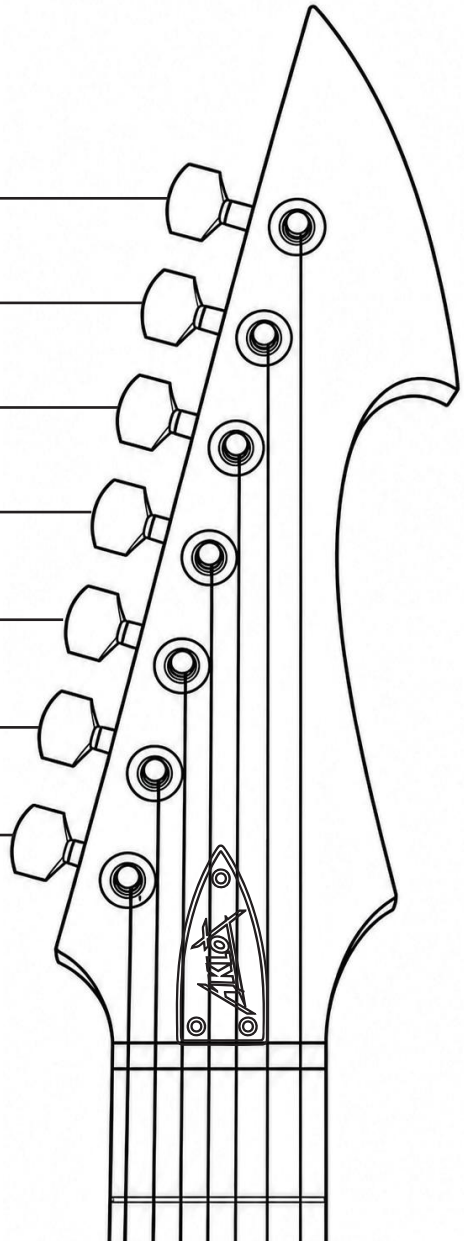

NOTE


Tune accurately using a reliable tuner.
Stretch new strings, then re-tune.

TUNING GUIDE - 8 STRING

HIGHEST PITCH (THINNEST)

E4	1
B3	2
G3	3
D3	4
A2	5
E2	6
B1	7
F#1	8

LOWEST PITCH (THICKEST)

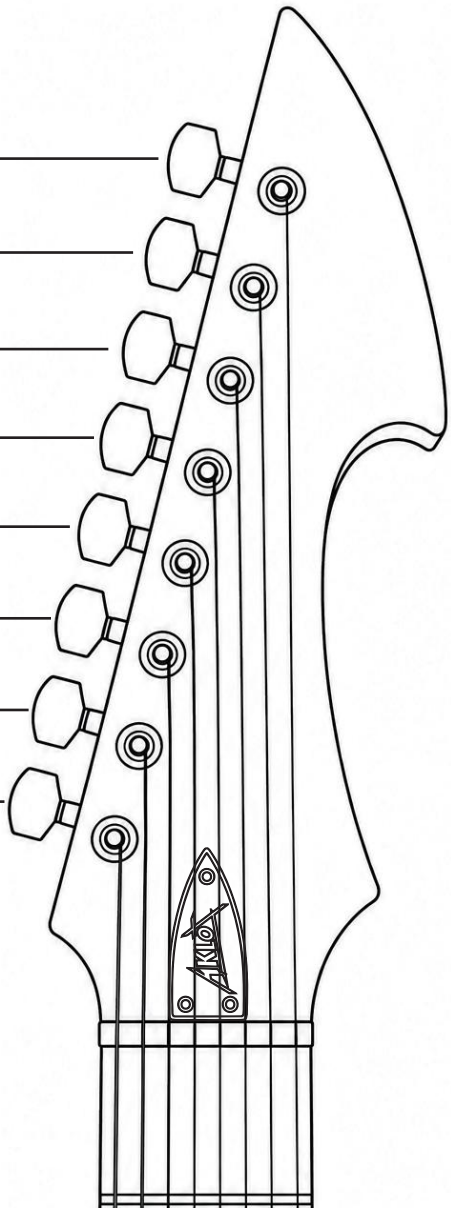


NOTE

Tune accurately using a reliable tuner.
Stretch new strings, then re-tune.


STRING INSTALLATION

1 INSERT

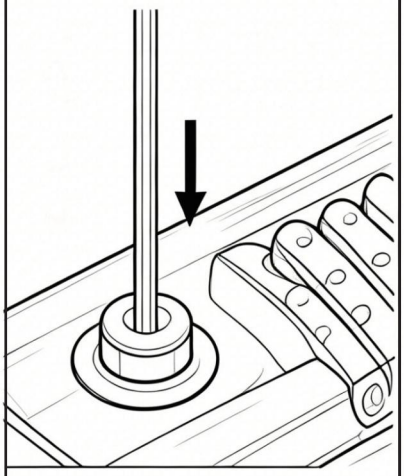


Insert the string through the back of the body and through the bridge ferrule.

2 WIND

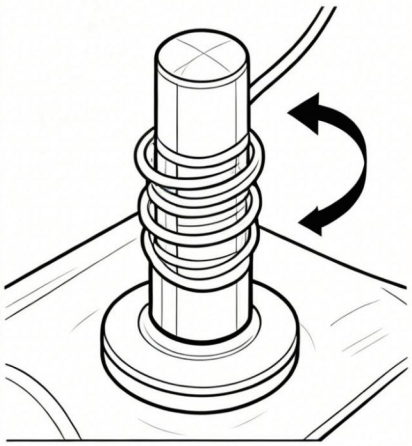

Wind the string from top to bottom on the tuning post. Keep the wraps tight and neat.

3 TRIM

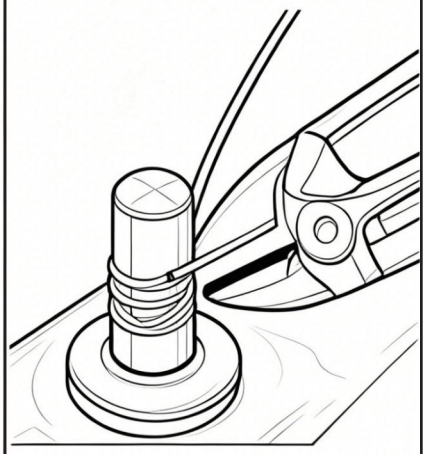


Trim the excess string close to the post using wire cutters.
Avoid over-cutting.

TIP


Leave 2-3 wraps on the post for stable tuning.
Stretch the string gently and re-tune after installation.

CONTROL GUIDE

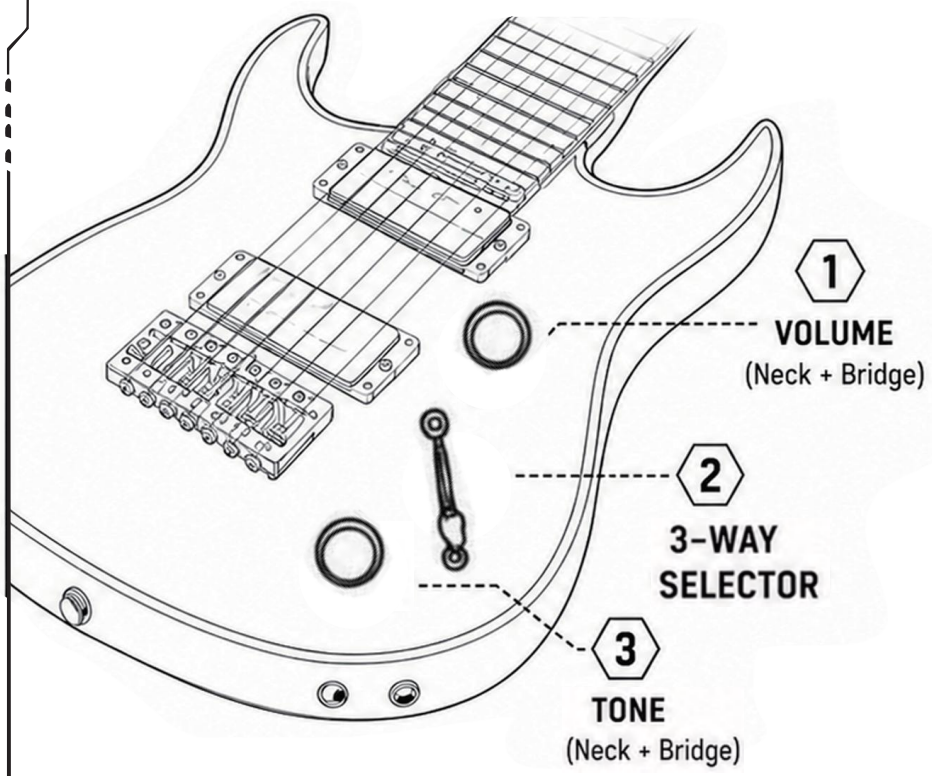



3-WAY PICKUP SELECTOR

POSITION 1
Neck pickup active




POSITION 2
Neck + bridge pickups active





POSITION 3
Bridge pickup active



1 VOLUME



Controls the overall output level.

2 3-WAY SELECTOR



Switches between pickup combinations.

3 TONE




Rolls off high frequencies.

CLEANING & DAILY MAINTENANCE


Regular care keeps your AKLOT PLN performing and looking its best for years to come.

1 WIPE DOWN

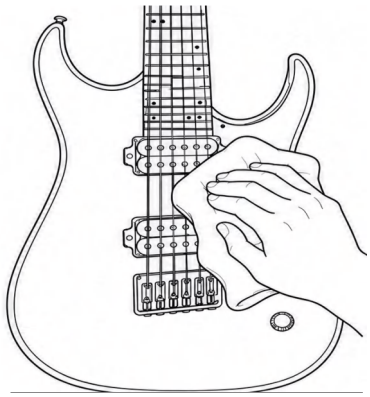


- After each play session, use a soft, lint-free cloth to remove sweat, oils, and dust from the body, pickups, and hardware.
- Pay extra attention to high-contact areas.

2 FRETBOARD CARE

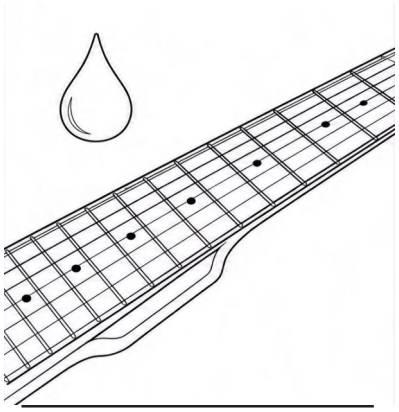

- Use a small amount of lemon oil on a cloth to clean and condition the fretboard.
- Wipe off any excess. Avoid getting oil on the frets.

3 FINISH CARE

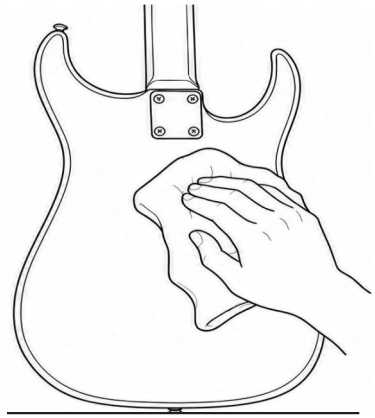

- Avoid harsh chemicals, polishes, or silicone products.
- Use only guitar-safe cleaners for the finish.

DAILY HABITS

KEEP CLEAN
Wipe after playing.



STORE PROPERLY
Use a case or stand in a stable environment.




CHANGE STRINGS REGULARLY
Maintain tone and playability

NECK RELIEF / TRUSS ROD ADJUSTMENT

Proper neck relief ensures comfortable playability and accurate intonation.

NECK CURVE OVERVIEW

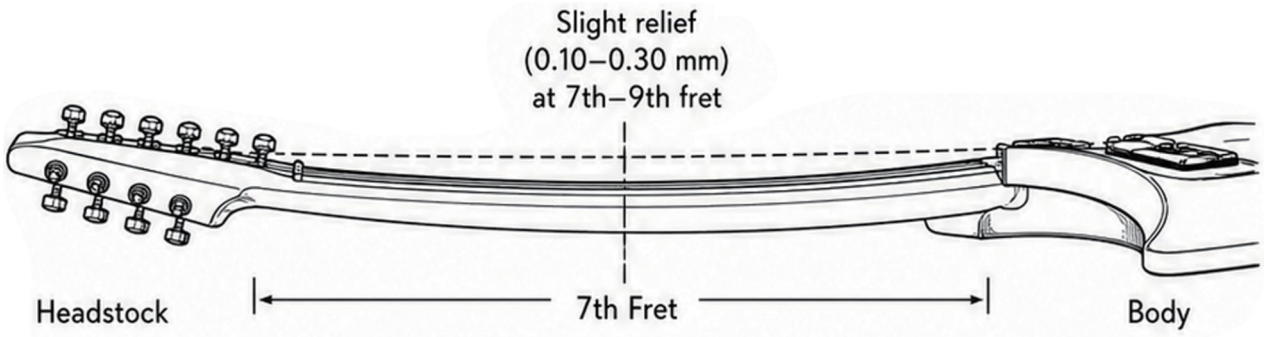

IDEAL NECK CURVE

With a capo at the 1st fret, press the low E/lowest string at the last fret.

Measure the gap at the 7th-9th fret.


Target relief: 0.10-0.30 mm(approx. the thickness of a business card).

LOOSEN (COUNTER-CLOCKWISE)



Reduces neck back-bow(relieves excessive relief).
Use when the neck is too curved or buzzes high notes (low actionin the middle).

TIGHTEN(CLOCKWISE)



Corrects forward bow(relieves high action).
Use when the neck istoo straight or buzzes low notes (high actionoverall).

CAUTION: Make small adjustments only, about 1/8 turn at a time. Allow the neck to settle before re-checking.

ACTION & INTONATION


Dial in comfortable playability and accurate tuning across the fretboard.

STRING ACTION EXAMPLES

LOW ACTION(EXAMPLE)

1.2-1.6 mm at 12th fret / Treble Side


1.6-2.0 mm at 12th fret / Bass Side

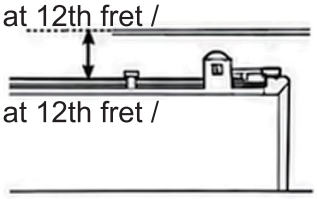

MEDIUM ACTION(EXAMPLE)

1.6-2.0 mm at 12th fret / Treble Side


2.0-2.5 mm at 12th fret / Bass Side

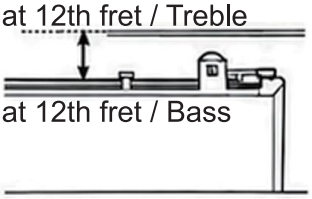

HIGH ACTION (EXAMPLE)


2.5-3.0 mm at 12th fret / Treble Side

2.5-3.5 mm at 12th fret / Bass Side

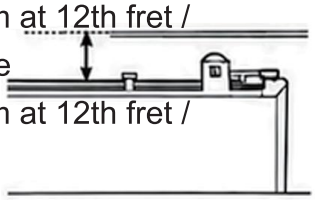

BRIDGE SADDLE ADJUSTMENT

(TYPICAL HARDTAIL)

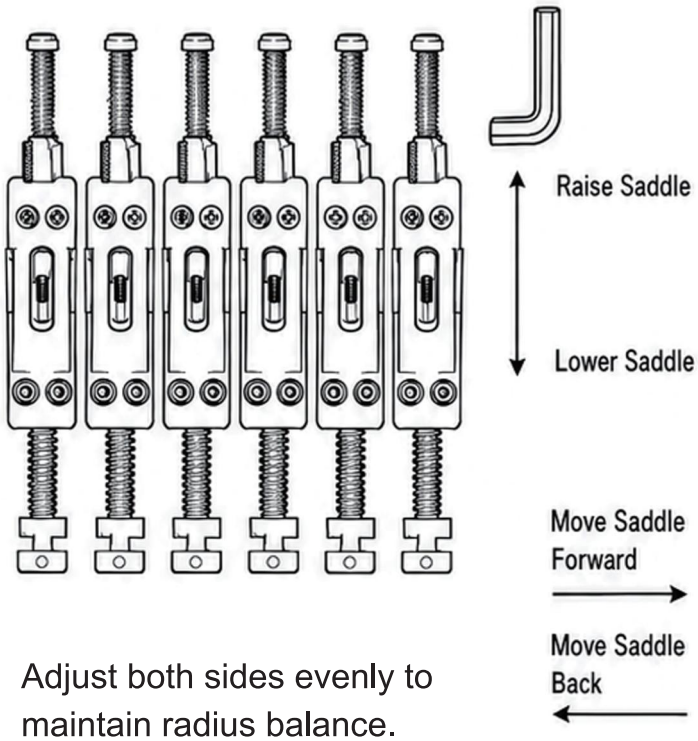

Adjust both sides evenly to maintain radius balance.

Action preference is personal.
Set to a height that feels comfortable without buzzing.


QUICK SETUP CHECKLIST

1. Set action to a comfortable height.
2. Check intonation with a tuner.
3. Adjust each saddle until the open string and 12th fret note are in tune.

HARDWARE CARE / STRING REPLACEMENT TIPS


Keep your hardware smooth, stable, and reliable.

1 TUNER CARE

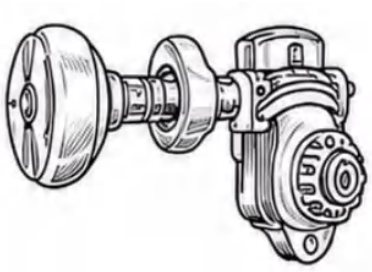


- Keep tuner gears clean and free of dust.
- Apply a drop of instrument lubricant to the gear, not the string post.
- Avoid over-tightening tuning screws.

2 BRIDGE CARE

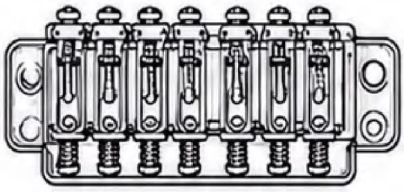

- Keep bridge saddles clean and free of debris.
- Check saddle screws and bridge mounting screws periodically, and tighten gently if needed.

3 STRING REPLACEMENT

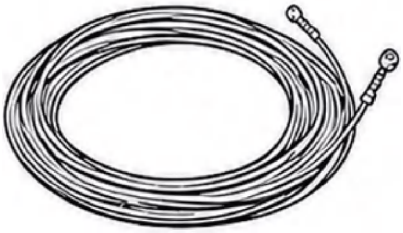

- Loosen or remove string tension before cutting.
- Install new strings one at a time to maintain neck balance.
- Stretch new strings gently and tune to pitch.

RECOMMENDED HABITS



WIPE STRINGS AFTER PLAYING



CHANGE EVERY 1-3 MONTHS



USE QUALITY STRINGS

Aklot


SAFETY
PRECAUTIONS

READ CAREFULLY BEFORE USE



AVOID EXTREME HEAT

Do not expose the guitar to direct sunlight or high temperatures.
Extreme heat can damage the finish and affect performance.



AVOID EXTREME HEAT

Do not expose the guitar to direct sunlightor
high temperatures. Extreme heat can
damage the finish and affect performance.




HANDLE WITH CARE

Avoid dropping or striking the guitar.
Impacts can damage the body, neck, and internal components.



BEWARE OF SHARP STRINGS

Strings are under tension and may cause injury.
Replace strings carefully and dispose of used strings properly.



SAFE STORAGE

Store in a case or gig bag when not in use.
Keep in a stable environment away from
moisture, heat, and direct sunlight.



CLEAN HANDS

Always wash and dry your hands before
playing to prevent dirt, oil, and corrosion on strings and hardware.

WARNING

FAILURE TO FOLLOW PRECAUTIONS MAY RESULT IN DAMAGE OR INJURY.

TROUBLESHOOTING /STORAGE & TRANSPORT

TROUBLESHOOTING GUIDE

ISSUE	POSSIBLE CAUSE	SOLUTION
NO OUTPUT	· Cable not connected · Amp not powered on · Volume set to zero · Faulty cable or pickup	·Check cable connections ·Turn on amp· Increase volume ·Test another cable / inspect pickup
TUNING INSTABI-LITY	· Strings not stretched · Nut slots too tight · Worn tuning pegs	· Stretch strings gently · Lubricate nut slots · Tighten or replacetuners
BUZZINGAT FRETS	· Low action · Relief adjustment needed · Loose hardware	· Raise action slightly · Adjust truss rod · Tighten screws /check bridge
WEAK ORMUDDY SOUND	· Old or dead strings · Pickup height incorrect · EQ settings	· Replace strings · Adjust pickup height · Adjust amp EQ
INTER / SWITCH NOT WORKING	· Loose wiring · Dirty contact /Oxidation · Faulty component	· Check connections · Clean contacts · Replace part if needed

/STORAGE & TRANSPORT


				
USE A CASE OR GIG BAG Always use a padded case or big bag to protect your guitar during storage & transport.	AVOID IMPACT & PRESSURE Avoid heavy presure and excessive movement that can damage the guitar.	KEEP AWAYFROM MOISTURE Avoid heavy presure and excessive movement that can damage the guitar.	AVOID EXTREME HEAT Don't leave the guitar in hot cars or under direct sunlight for extended periods..	KEEP AWAY FROM DUST Dust can affect play ability and electronics. Clean and cover when not in use.

TIP REGULAR CARE . BETTER PERFORMANCELONGER INSTRUMENT LIFE.

Aklot

AKLOT

SHRED THE LINE

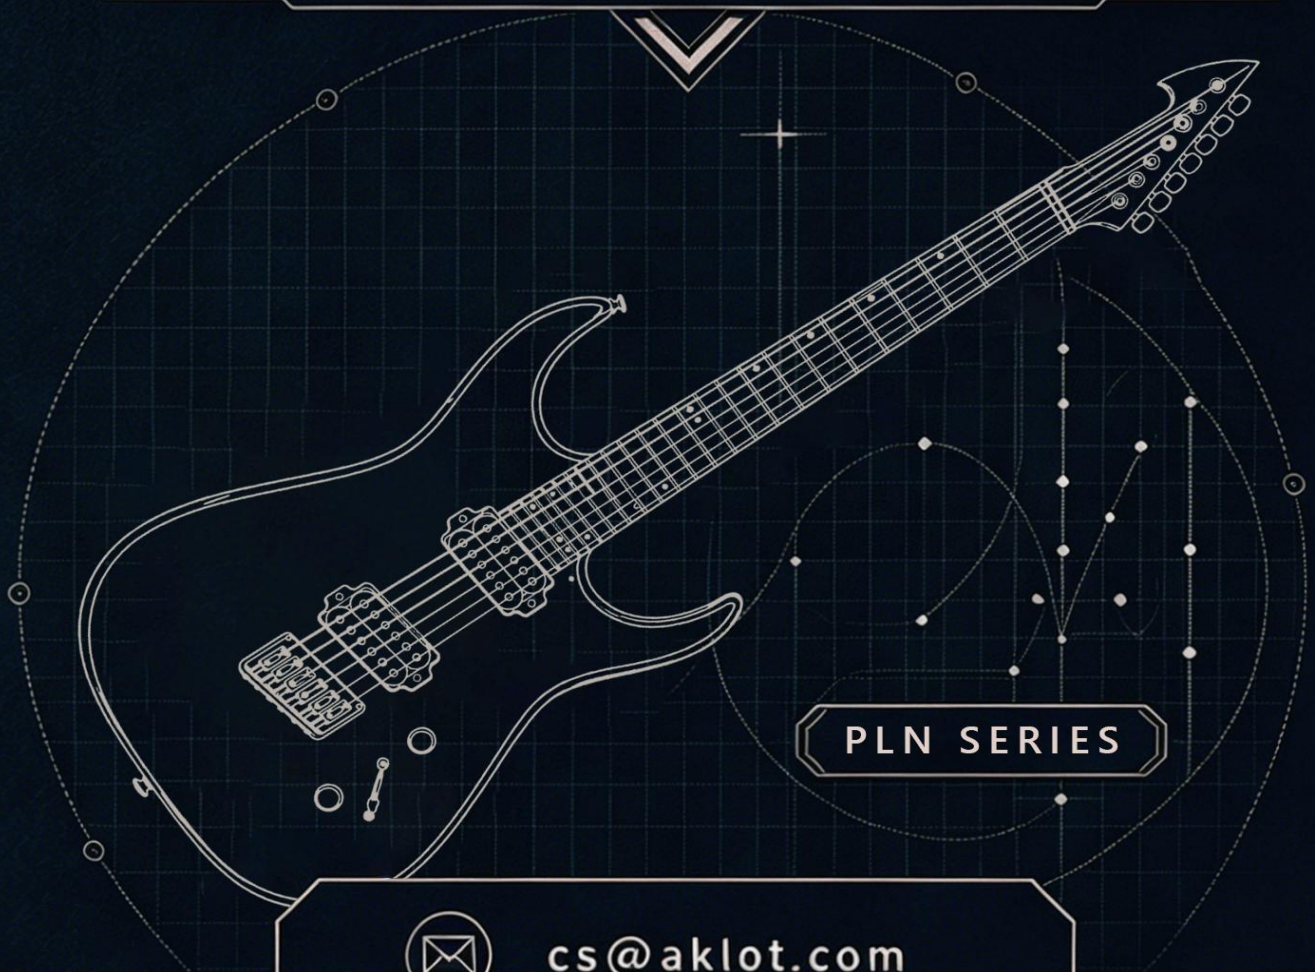

PLN SERIES

cs@aklot.com

www.aklot.com

FOLLOW US

THANK YOU FOR BEING
PART OF THE AKLOT FAMILY.