
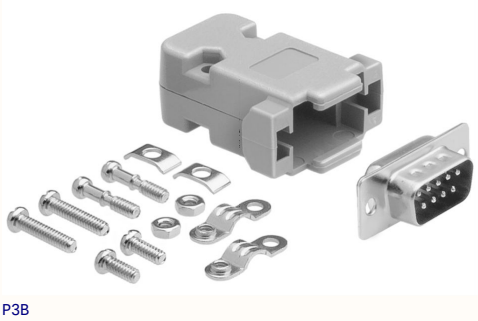
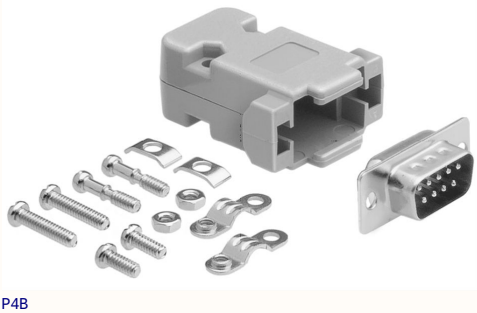




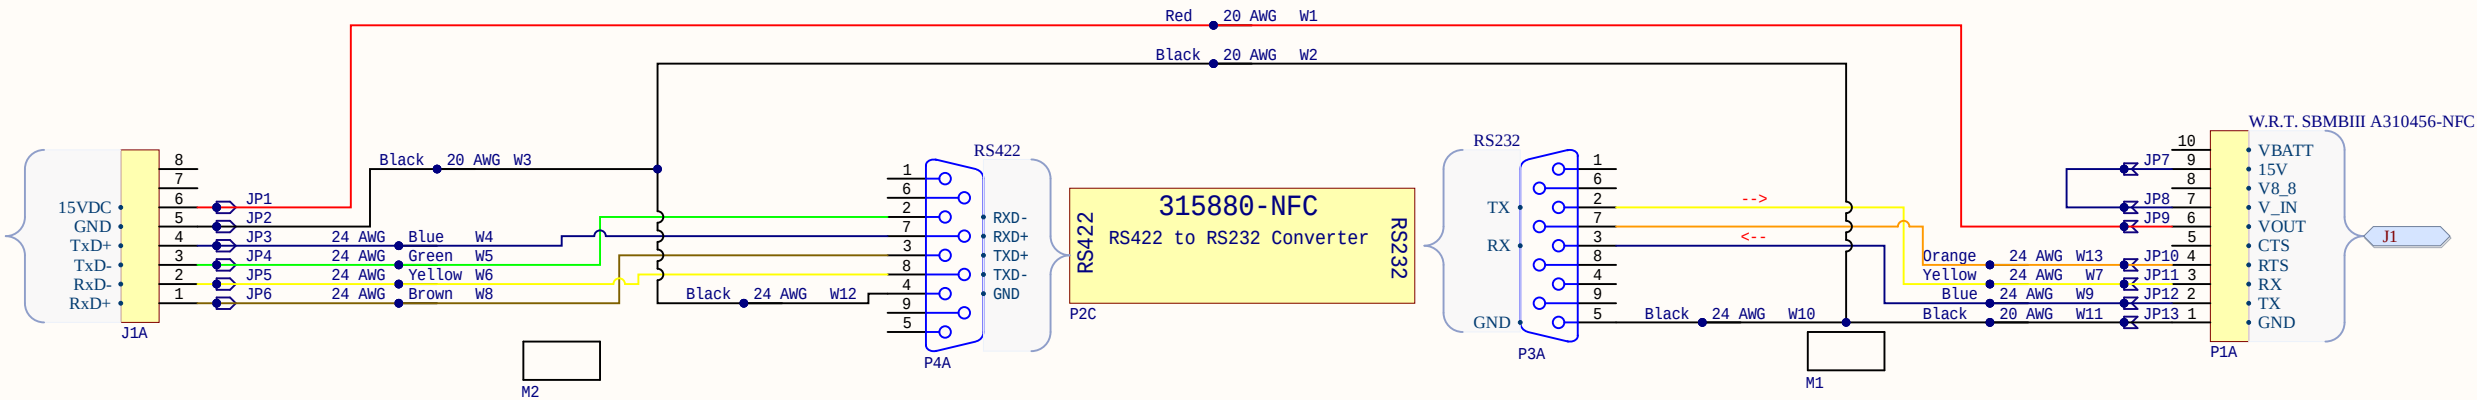


EXPORT NOTICE

ECCN#: Contact Teledyne, if required

Information included herein is controlled by the Export Administration Regulations (EAR) and may require an export license, license exception or other approval from the appropriate U.S. Government agency before being exported from the United States, reexported, transferred, or retransferred to any non-U.S. person. Diversion contrary to U.S. law is prohibited.

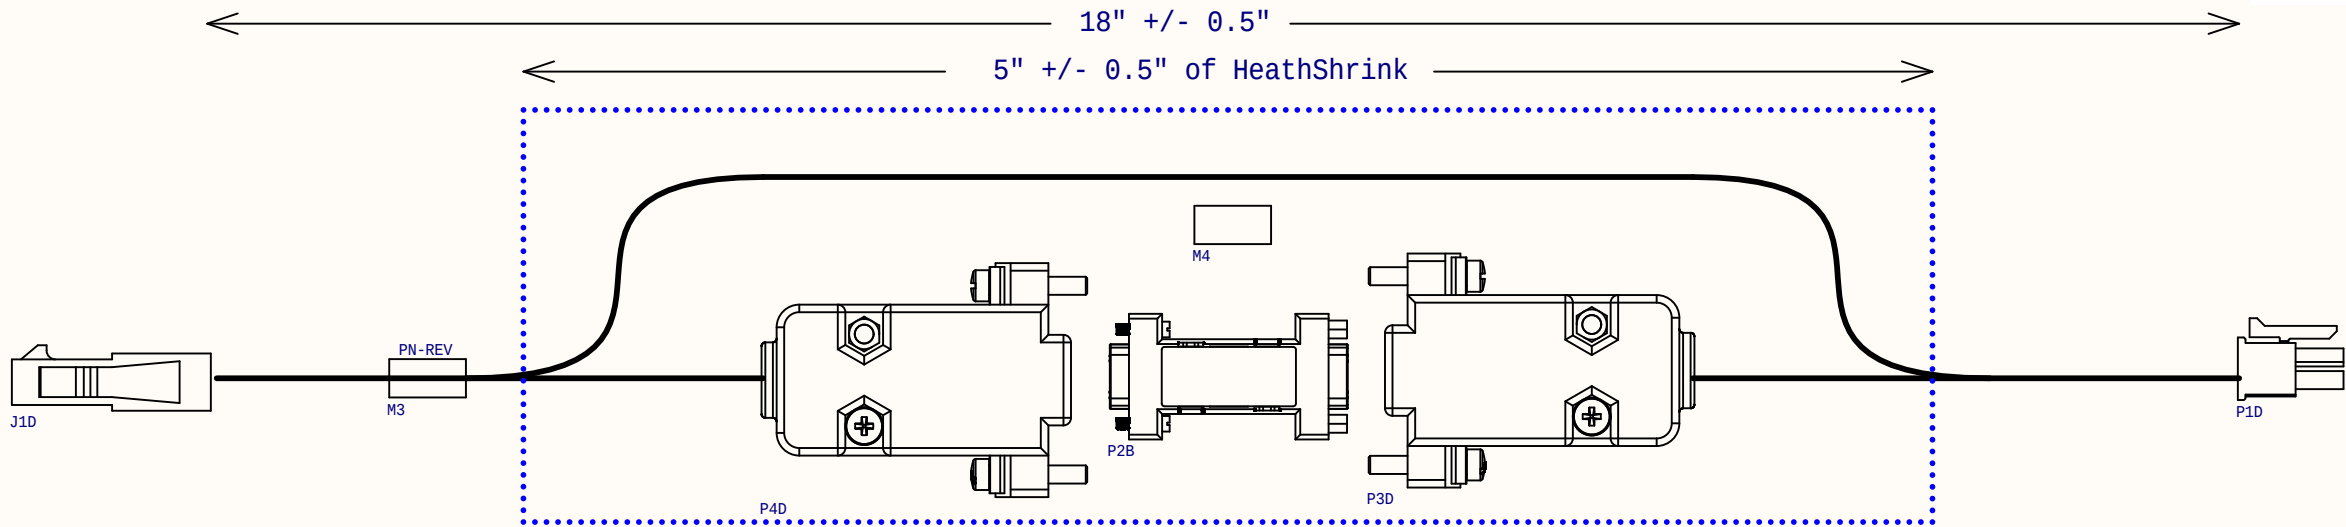

NOTES:

1. ADD HEAT SHRINK LABEL OVER WIRES AS SHOWN, A315881-NFC (current revision)
2. TRIM BACK ALL CONDUCTORS FOR CRIMPING AND SOLDERING
3. ADD CRIMP PINS TO ALL CONDUCTORS
4. SPIRAL WRAP OR HEAT SHRINK CONDUCTOR BUNDLE
5. PLUG DB9 CONNECTORS INTO CONVERTER
6. COVER SPLICES WITH HEATSHRINK
7. COVER CONVERTER AND RED/BLACK (W1&W2) CONDUCTORS WITH HEATSHRINK AS SHOWN
8. FABRICATION TO COMPLY WITH REQUIREMENTS OF:
IPC/WHMA-A-620; CLASS 2

INITIAL RELEASE	NAME	DATE
DRAWN	JCK	02/26/2024
CHECKED		
Cage Code		5ZSA5

PROPRIETARY

This document and the information contained herein is proprietary to Teledyne Webb Research, a business unit of Teledyne Instruments, Inc. and may not be used, reproduced or disclosed without the express written consent of Teledyne Webb Research, 49 Edgerton Dr., North Falmouth, MA 02556.



**TELEDYNE
WEBB RESEARCH**
Everywhereyoulook™

North Falmouth, MA 02556 508-563-1000

EK80 COM&PWR to SBMBIII

Size: B	Schematic Number: A315881-NFC-[No Variations]	Revision: 4
File: A315881-NFC.SchDoc		Sheet 1 of 1

Date	Zone	Rev	ECO	Description	Drwn	Chk	Appr
8/26/2024		4		ADDED M4 HEATSHRINK	JCK		
7/23/2024		3		Updated J1 Pinout	JCK		
7/11/2024		2		Updated RS422 Connections	JCK		