

3

EGGER 18MM MFC BOARDS  
3 × 2800×2070mm

0

SEPARATE DRAWER SHEETS  
Drawers cut from same boards

3

TOTAL BOARDS  
Complete Build

44

TOTAL PARTS  
All pieces including drawers

**Egger 2800×2070mm Optimised Format:** By setting the overall desk length to **2800mm**, the desktop (2800×900mm) and cable trench lid (2800×100mm) are each cut as a **single continuous, seamless piece** with zero joins. The entire desk—including all carcass gables, dividers, plinths, backs, shelf, tray, and all 4 internal drawer boxes—is built from **EXACTLY 3 BOARDS** of 2800×2070mm Egger MFC. The 200mm length reduction is distributed evenly by sizing the two operator footwells to 550mm each (leaving pedestals at 450mm and the centre equipment bay at 800mm).

18mm Egger MFC (Natural Kendal Oak) — Complete Desk & Drawer Boxes

Green outline = 2800×2070mm Egger Board Format

A · CARCASS, WORKTOP & STRUCTURAL PANELS

| REF | DESCRIPTION                            | QTY | L MM | W MM | THK  | BOARD FORMAT | NOTES                                                                               |
|-----|----------------------------------------|-----|------|------|------|--------------|-------------------------------------------------------------------------------------|
| A1  | Desktop Panel (cable trench routed)    | 1   | 2800 | 900  | 18mm | 2800×2070mm  | Seamless single piece along full 2800mm length. 100mm trench routed from underside. |
| A2  | Cable Trench Lid                       | 1   | 2800 | 100  | 18mm | 2800×2070mm  | Seamless single piece along full 2800mm length. Piano hinge rear edge.              |
| A3  | Outer Left End Panel (Gable)           | 1   | 860  | 742  | 18mm | 2800×2070mm  | Visible outer left gable. Height 742mm (760 - 18mm top). Depth 860mm.               |
| A4  | Outer Right End Panel (Gable)          | 1   | 860  | 742  | 18mm | 2800×2070mm  | Visible outer right gable. Height 742mm (760 - 18mm top). Depth 860mm.              |
| A5  | Internal Divider — Left Pedestal Inner | 1   | 860  | 742  | 18mm | 2800×2070mm  | Vertical panel at 450mm from left outer end.                                        |
| A6  | Internal Divider — Left Centre         | 1   | 860  | 742  | 18mm | 2800×2070mm  | Vertical panel at 1000mm from left outer end.                                       |
| A7  | Internal Divider — Centre Sub-Divider  | 1   | 860  | 742  | 18mm | 2800×2070mm  | Partition between PC tower and equipment rack bays.                                 |

| REF | DESCRIPTION                             | QTY | L MM | W MM | THK  | BOARD FORMAT | NOTES                                                       |
|-----|-----------------------------------------|-----|------|------|------|--------------|-------------------------------------------------------------|
| A8  | Internal Divider — Right Centre         | 1   | 860  | 742  | 18mm | 2800x2070mm  | Vertical panel at 1800mm from left outer end.               |
| A9  | Internal Divider — Right Pedestal Inner | 1   | 860  | 742  | 18mm | 2800x2070mm  | Vertical panel at 2350mm from left outer end.               |
| A10 | Plinth — Left Pedestal                  | 1   | 860  | 450  | 18mm | 2800x2070mm  | Full depth 860mm front to back under left pedestal.         |
| A11 | Plinth — Centre Bay                     | 1   | 860  | 800  | 18mm | 2800x2070mm  | Full depth 860mm under central PC and rack sections.        |
| A12 | Plinth — Right Pedestal                 | 1   | 860  | 450  | 18mm | 2800x2070mm  | Full depth 860mm front to back under right pedestal.        |
| A13 | Plinth — Left Leg Recess (Kicker)       | 1   | 550  | 300  | 18mm | 2800x2070mm  | Rear 300mm depth only under 550mm operator footwell.        |
| A14 | Plinth — Right Leg Recess (Kicker)      | 1   | 550  | 300  | 18mm | 2800x2070mm  | Rear 300mm depth only under 550mm operator footwell.        |
| A15 | Back Panel — Left Pedestal              | 1   | 450  | 760  | 18mm | 2800x2070mm  | Full-height 760mm rear closure panel.                       |
| A16 | Back Panel — Left Operator Recess       | 1   | 550  | 760  | 18mm | 2800x2070mm  | Rear closure panel for 550mm operator recess.               |
| A17 | Back Panel — Right Operator Recess      | 1   | 550  | 760  | 18mm | 2800x2070mm  | Rear closure panel for 550mm operator recess.               |
| A18 | Back Panel — Right Pedestal             | 1   | 450  | 760  | 18mm | 2800x2070mm  | Full-height 760mm rear closure panel.                       |
| A19 | Equipment Bay Fixed Shelf               | 1   | 780  | 480  | 18mm | 2800x2070mm  | Supports power strip and induction loop amplifier.          |
| A20 | Tower PC Pull-Out Tray                  | 1   | 780  | 260  | 18mm | 2800x2070mm  | Mounted on heavy-duty telescopic slide rails.               |
| A21 | Drawer Front Panels                     | 4   | 404  | 290  | 18mm | 2800x2070mm  | 2 per pedestal. Finished oak face visible. Handles centred. |

B • DRAWER BOX CONSTRUCTION (BUILT FROM SAME 18MM EGGER MFC)

| REF | DESCRIPTION            | QTY | L MM | W MM | THK  | BOARD FORMAT | NOTES                                                              |
|-----|------------------------|-----|------|------|------|--------------|--------------------------------------------------------------------|
| B1  | Drawer Box Side Walls  | 8   | 570  | 220  | 18mm | 2800×2070mm  | 2 sides per box × 4 drawers. 570mm length for 600mm runner.        |
| B2  | Drawer Box Front/Back  | 8   | 368  | 220  | 18mm | 2800×2070mm  | 1 front + 1 back per box × 4 drawers.                              |
| B3  | Drawer Box Base Panels | 4   | 546  | 340  | 18mm | 2800×2070mm  | 1 bottom panel per box × 4 drawers. Rebated or grooved into sides. |

BOARD LAYOUT — OPTIMISED NESTING DIAGRAMS (3 BOARDS TOTAL)

Guillotine cuts with 3mm saw-kerf allowance. The long 2800mm wood grain flows along the worktop and carcass gables. Hover over any piece to inspect its label and dimensions.


18mm Egger MFC (Natural Kendal Oak) — Complete Build

3 boards required · 44 parts · 3 × 2800×2070mm

Ø 19% waste

Board 1 of 3 2800×2070mm


9% waste

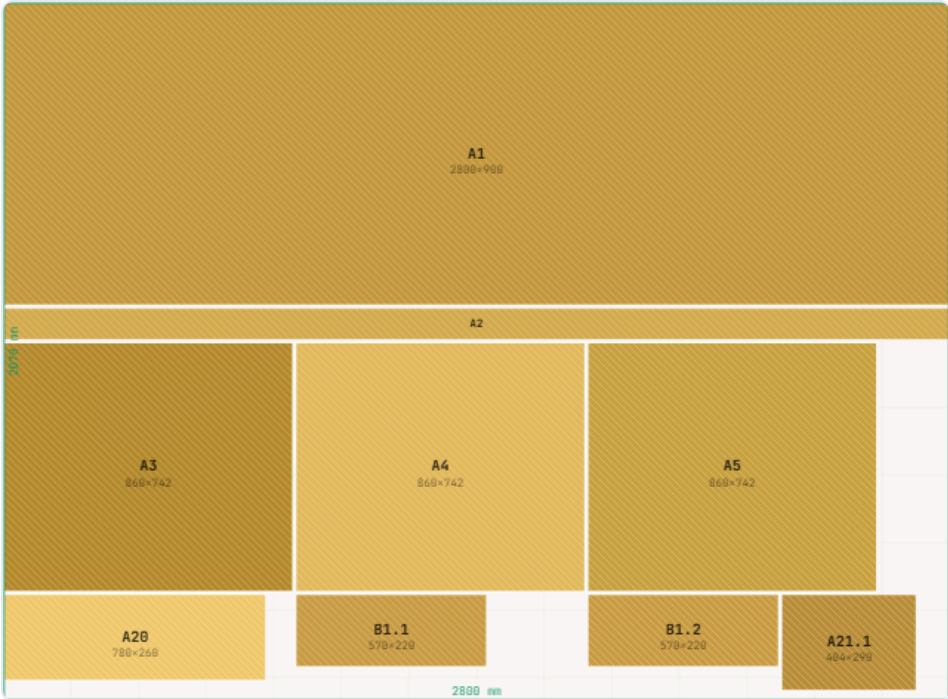

Hover a part to see details

Board 2 of 3 2800×2070mm


9% waste

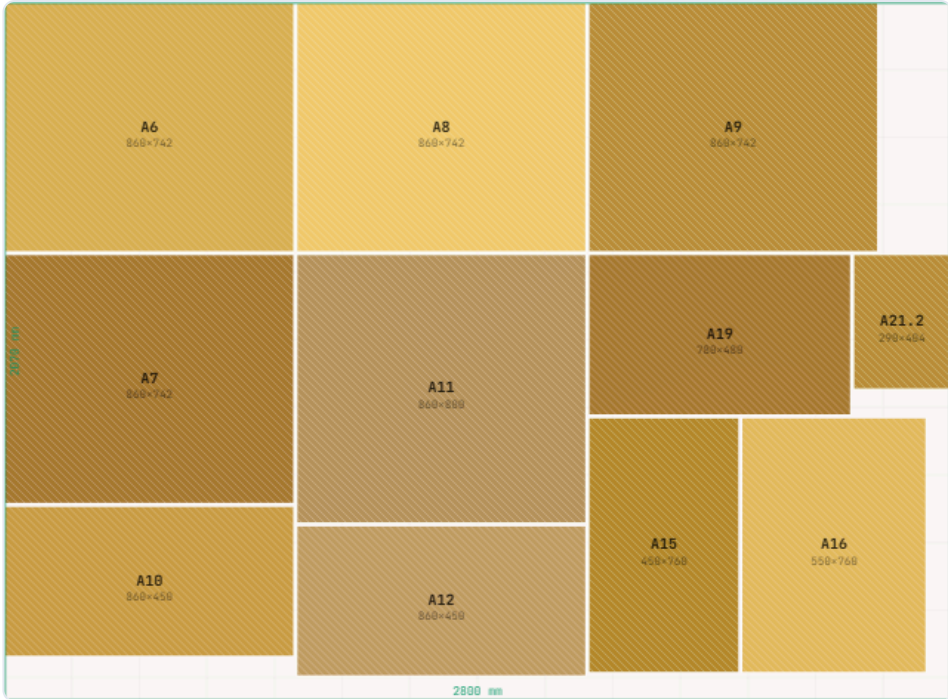

Hover a part to see details

Board 3 of 3 2800×2070mm

40% waste

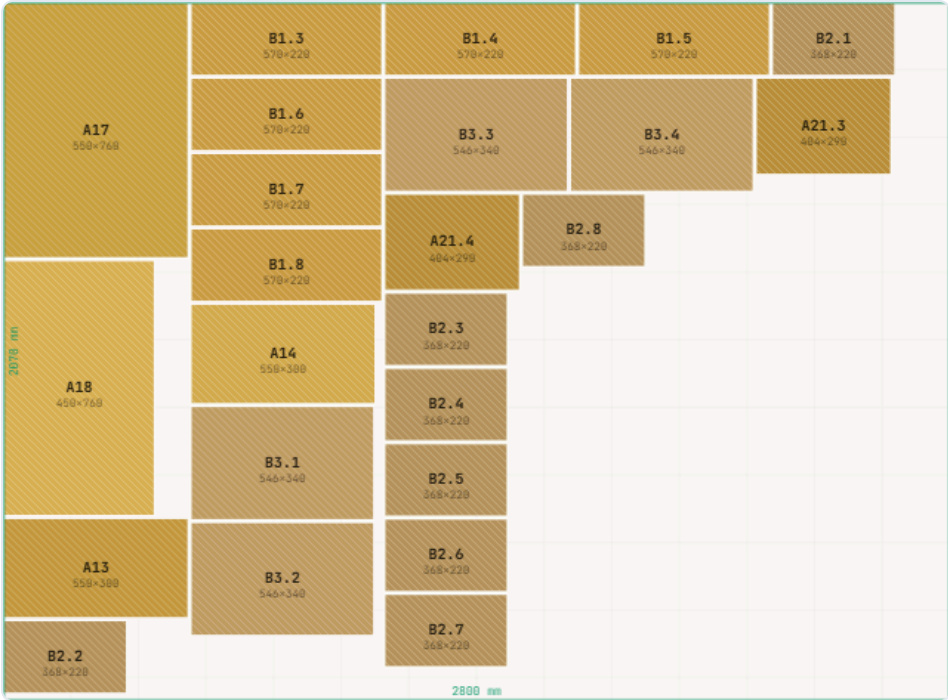

Hover a part to see details

HARDWARE SCHEDULE

- ◆ **Trench Lid Hinge:** 1x 2800mm Continuous Stainless Steel Piano Hinge (heavy duty).
- ◆ **Drawer Slides:** 4 Pairsx 600mm Soft-Close Full-Extension Ball Bearing Slides (35kg rated).
- ◆ **PC Pull-Out Slides:** 1 Pairx 750mm Heavy-Duty Telescopic Slide Rails (45kg+ rated).
- ◆ **Pull Handles:** 4x Matte Black Anodised Bar Pulls (120mm fixing centres).
- ◆ **Cable Grommets:** 22x Flexible Black Rubber Capsule Grommets (25x60mm cut-out).
- ◆ **Egger 2mm ABS Edge Banding:** ~55m of matching Natural Kendal Oak ABS edge tape for all exposed edges.
- ◆ **Conformat / Twin-Thread Screws:** 50mm Conformat or 4x45mm twin-thread screws for
- ◆ **Connecting Bolts:** 8x M6x50mm furniture connecting bolts & barrel nuts to secure desktop
- ◆ **Adhesive:** 500ml High-strength PVA Wood Glue. Pre-drill all screw holes with 3.5mm stepped bit.

structural MFC joints.

to carcass.

WORKSHOP NOTES — EGGER MFC 2800MM BUILD

**Seamless 2800mm Top:** The 2800mm desktop panel (A1) and 2800mm cable trench lid (A2) are cut along the full 2800mm length of Sheet 1, giving a perfectly continuous wood grain and eliminating any joint line.

**Complete Build in 3 Boards:** All 44 panels (including carcass, dividers, plinths, and all 4 drawer boxes) are produced from just 3 boards of 2800×2070mm. Sheet 3 has ~2.2 m² of clean off-cut for workshop shelving.

**Chip-Free MFC Machining:** To prevent surface melamine chipping, use an 80-tooth triple-chip grind (TCG) blade on a table/plunge saw, score cut lines with a sharp knife first, or use a sacrificial backing board.

**Pre-Drilling Pilots:** Melamine chipboard cores can mushroom if screws are driven without pilot holes. Always pre-drill with a 3.5mm bit and countersink cleanly before fastening.

**Edge Banding Application:** Apply 2mm matching ABS edge banding with hot-melt glue or pre-glued tape with a heat gun. 2mm ABS gives durable, impact-resistant radiused edges that protect high-wear corners.

**Under-Top Load Distribution:** The 2800mm desktop bears directly on all seven 18mm vertical gables and dividers, providing exceptional rigidity with zero risk of sag across the desk.