

Printer Dover

Spruce version 11.2 -- spooler version 11.2

File: terminal01.SIL etc.


Creation date: 15-Dec-82 10:35:52



For: Spruce

12 total sheets = 11 pages, 1 copy.

Problems encountered:


Font HELVETICA24B substituted for font HELVE24.

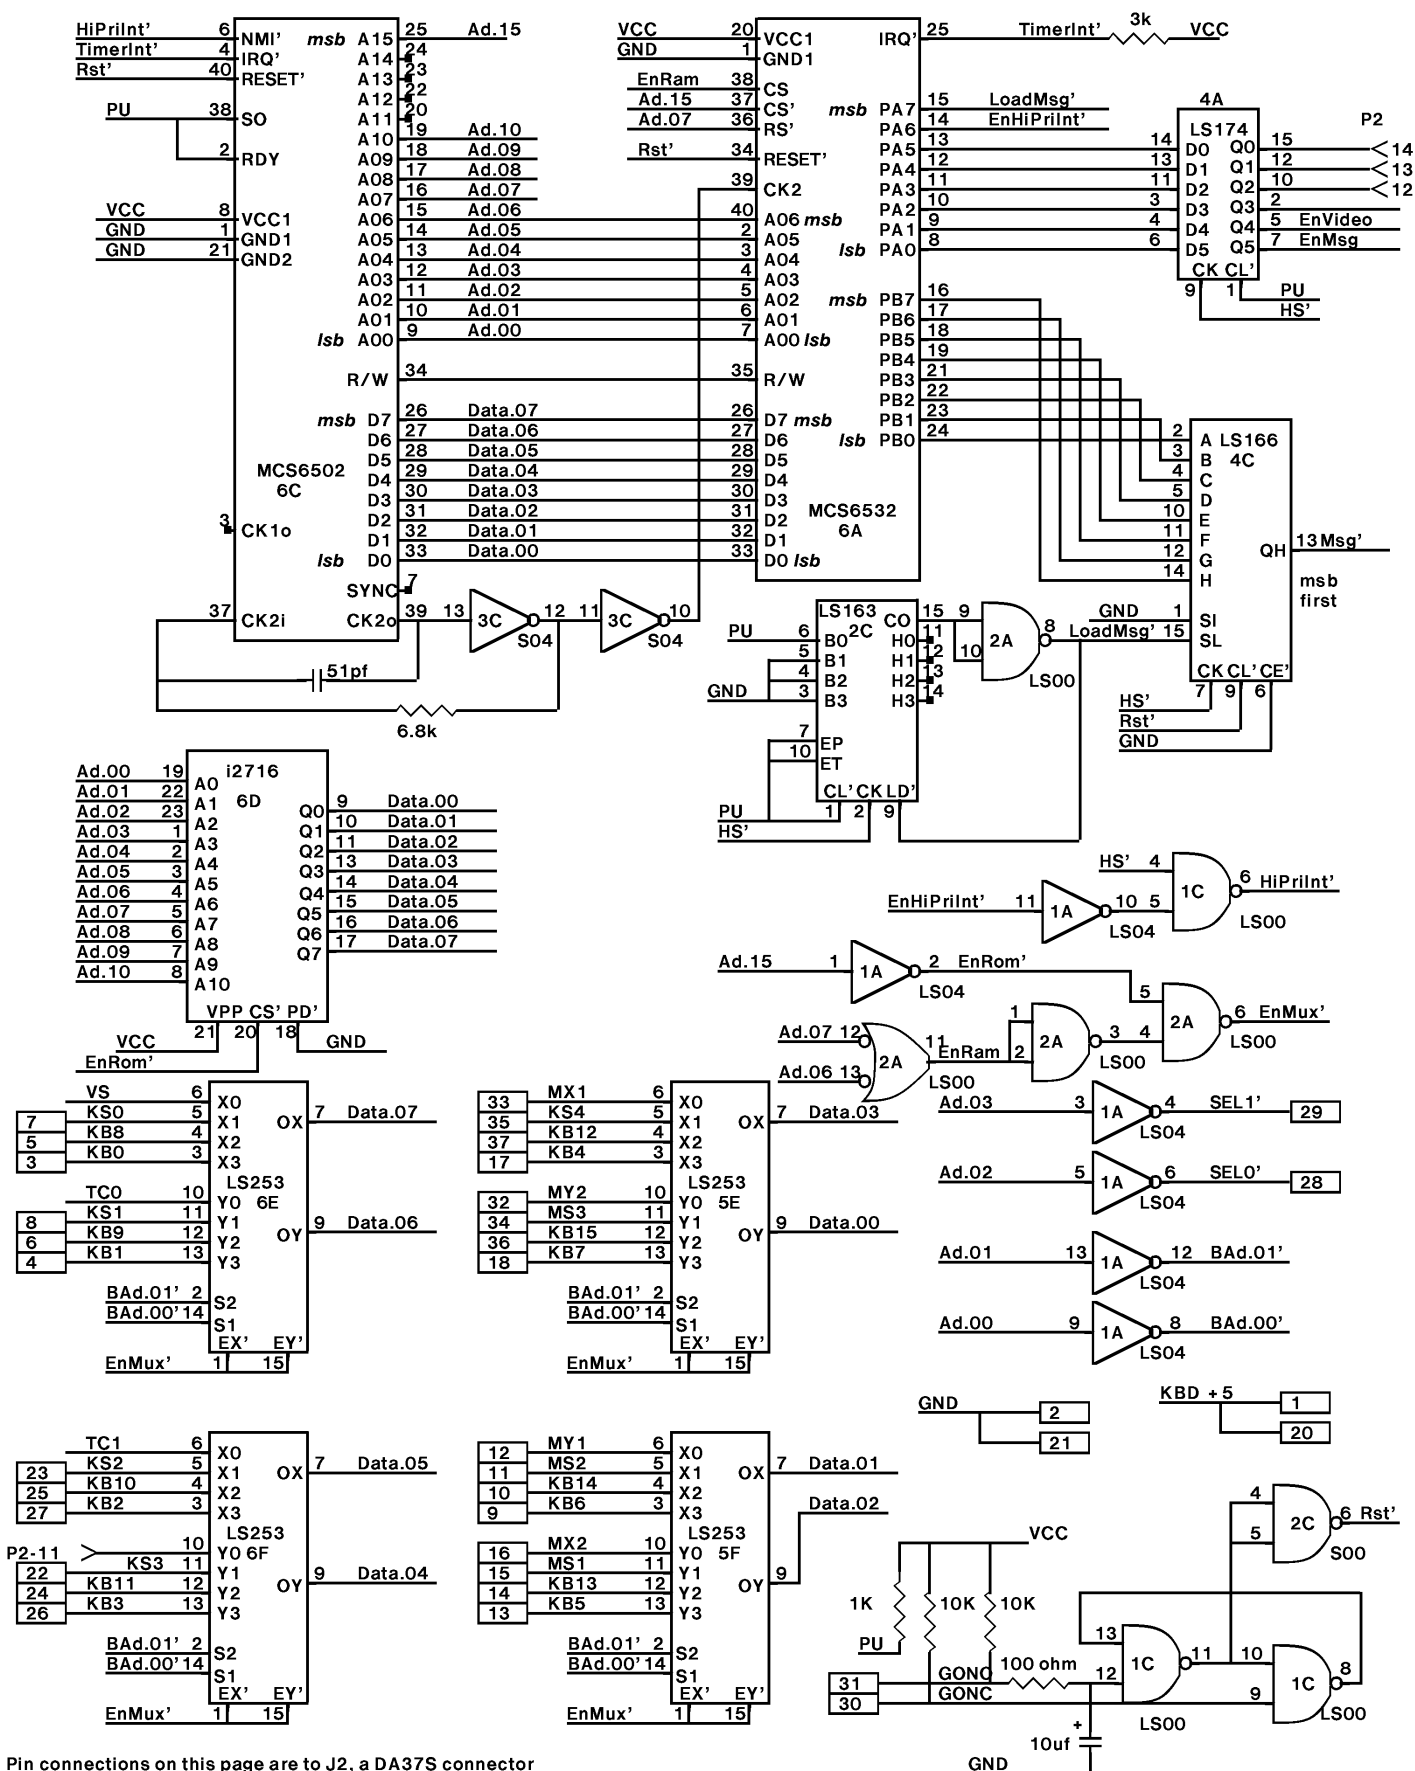

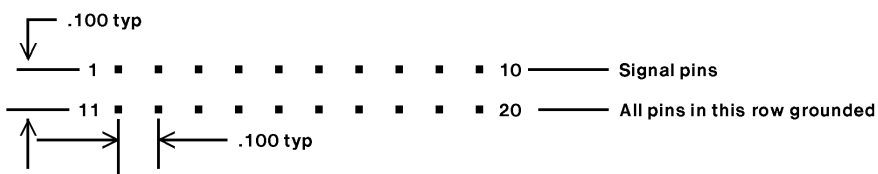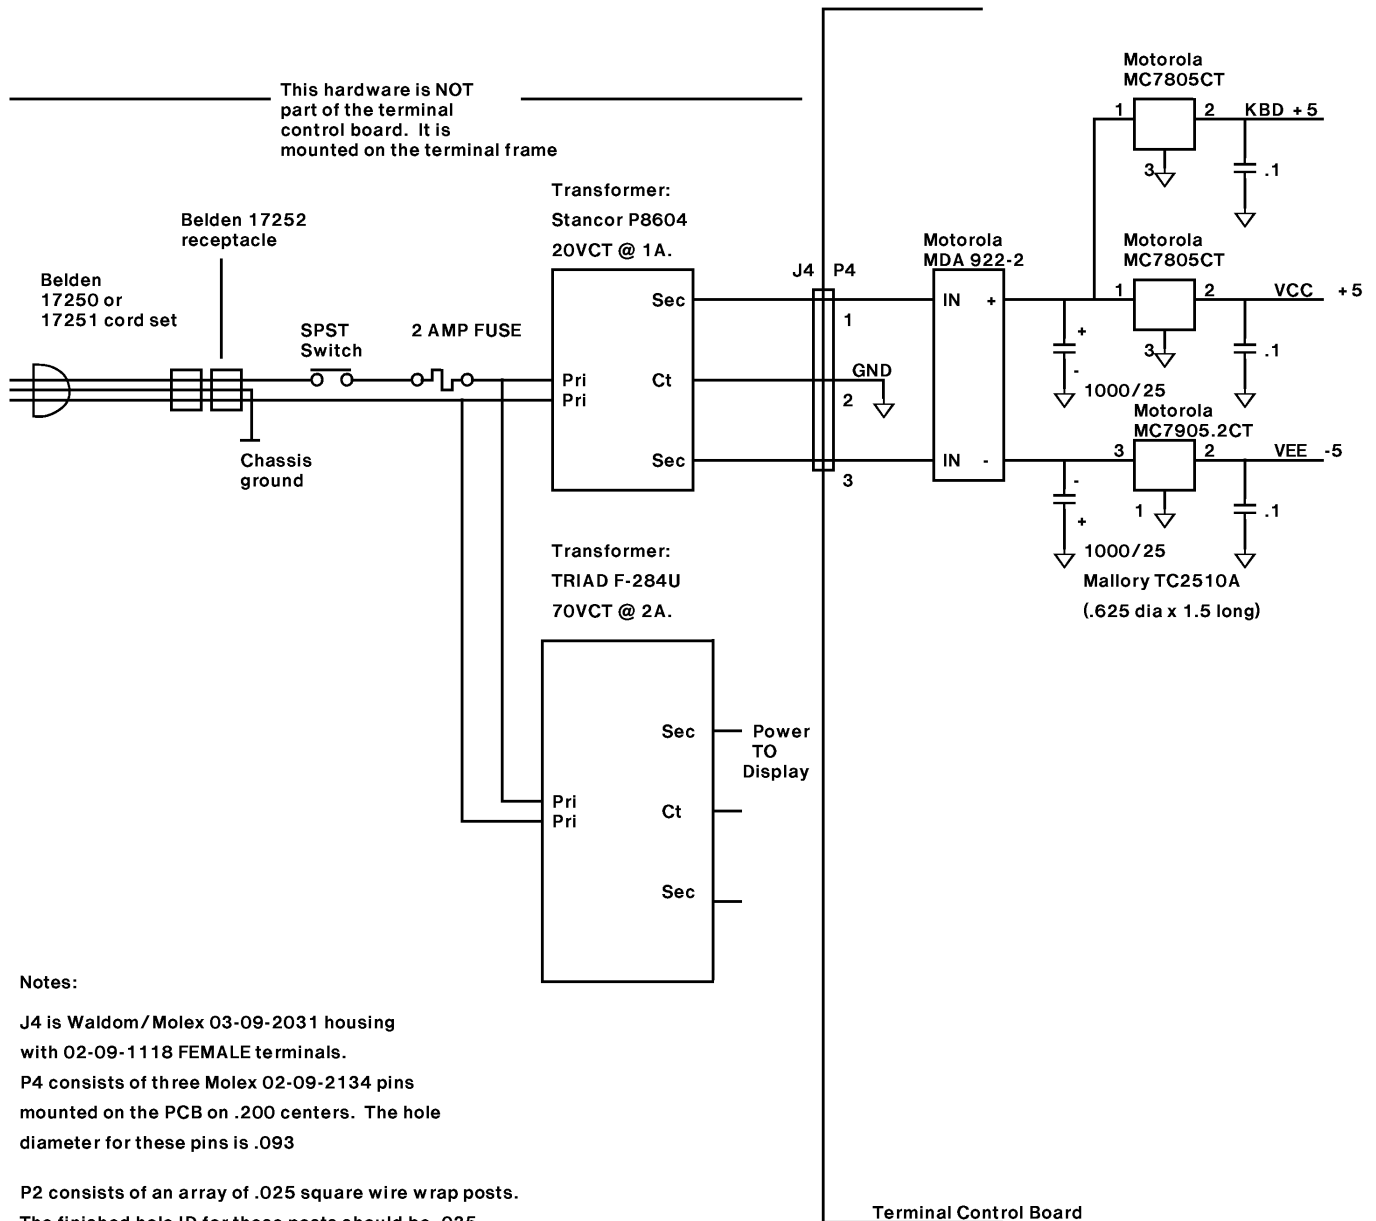

3) VCC and VEE have one .01uf bypass capacitor per IC package.


Terminal Control Board


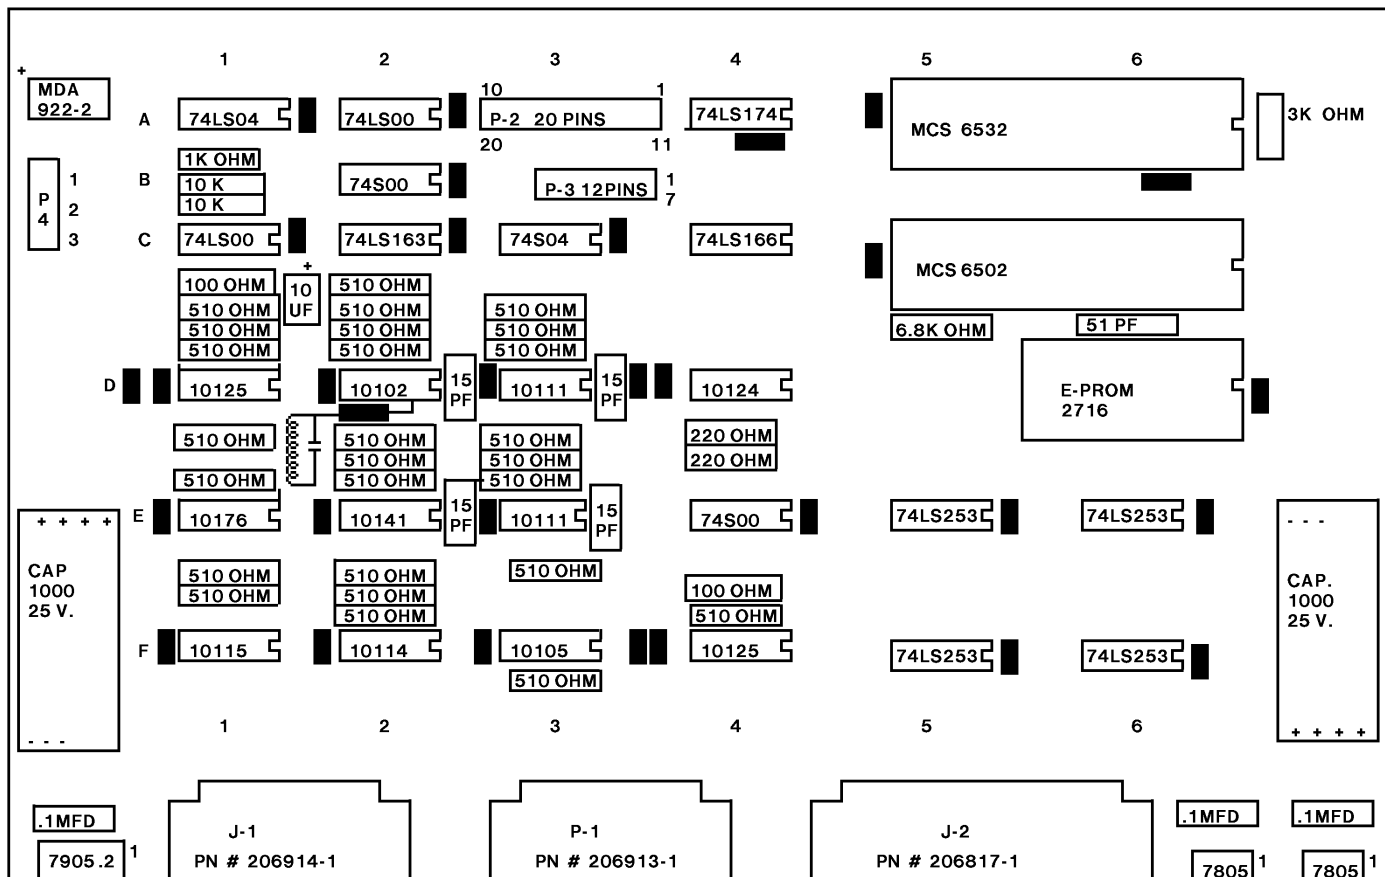


NOTES


1. IS A .01 UF CAP.
2. IS A .01 UF CAP.

BACKPANEL

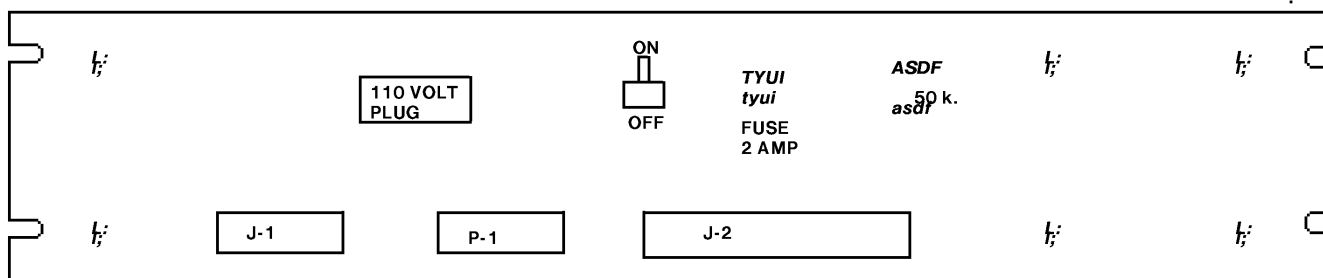

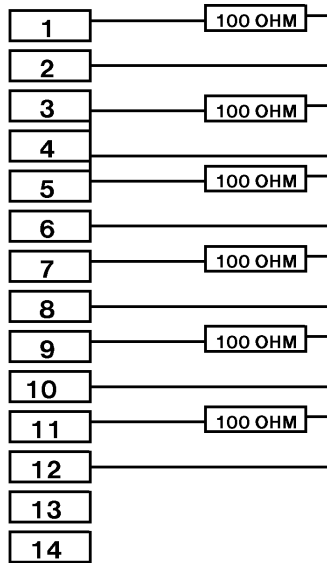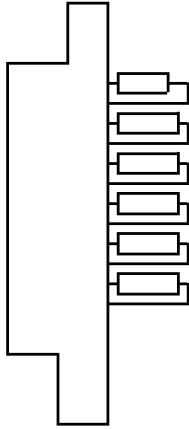


NOTES
RESISTORS ARE 100 OHM 1/4 WATT
TERMINATOR CONNECTOR IS DA 15S

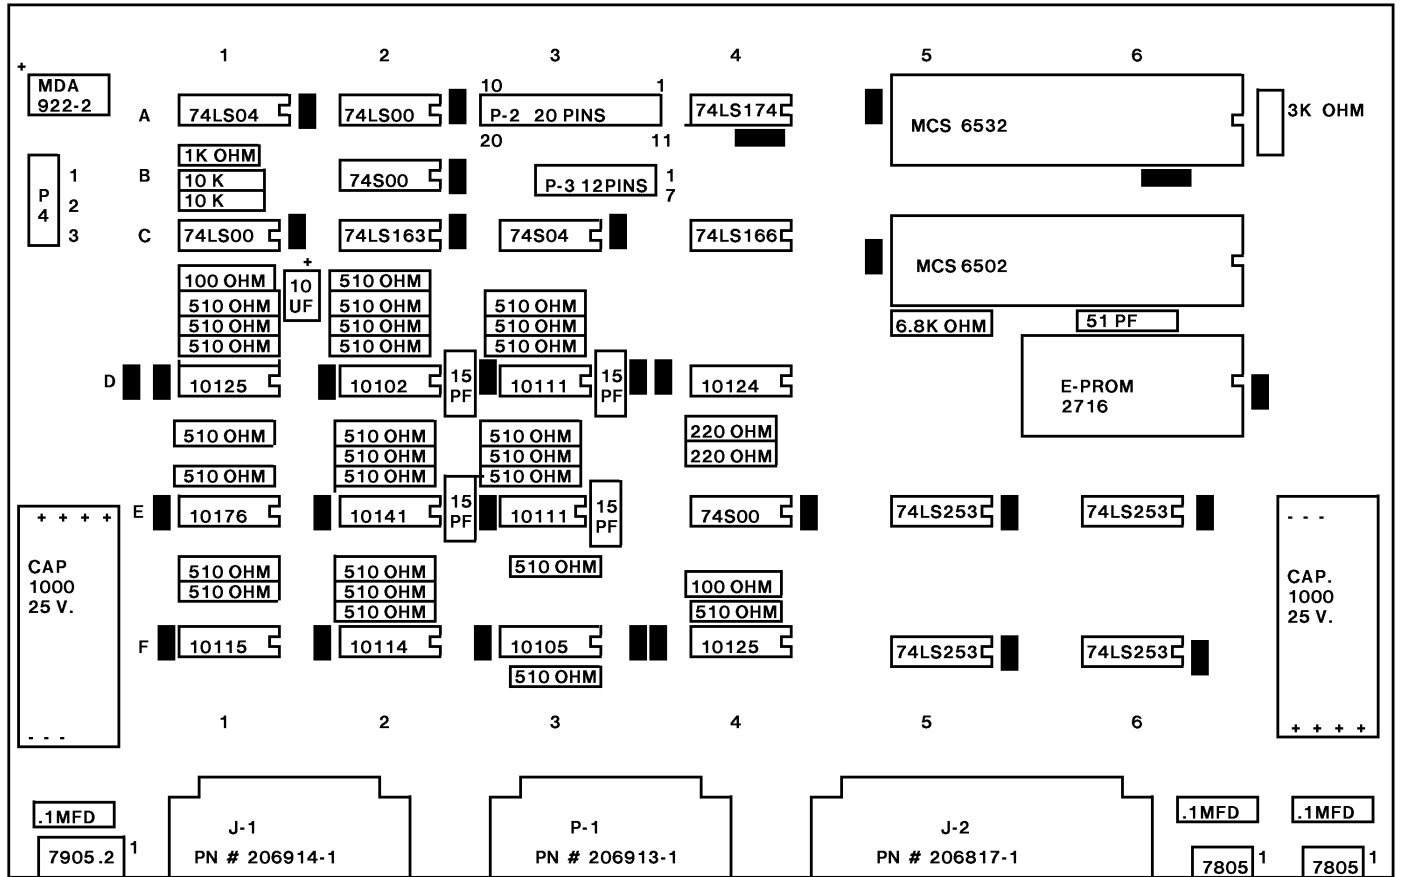


NOTES

1. [Symbol] IS A .01 UF CAP.
2. [Symbol] IS A .01 UF CAP.

BACKPANEL

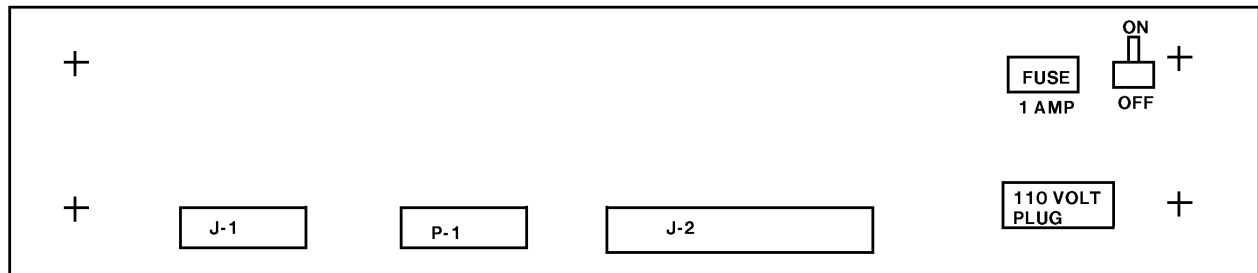

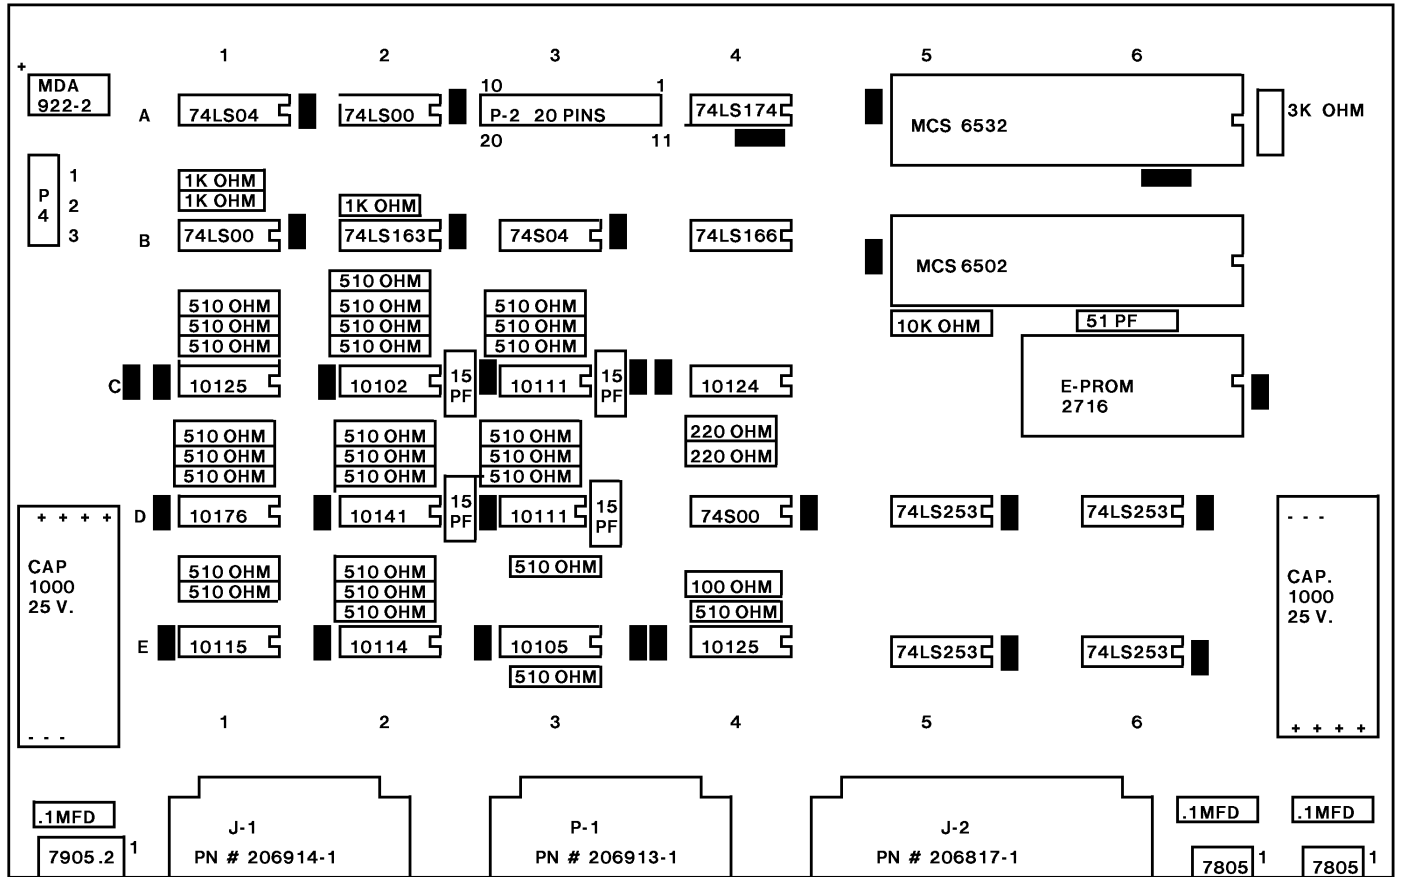






NOTES



1. [Symbol] IS A .01 UF CAP.
2. [Symbol] IS A .01 UF CAP.

CHANGES TO FIRST BUILD OF THE GARAGE MODEL D0

1. I/C IN LOCATION 2-B PULL PINS # 3, 4 & 5 OUT OF THE SOCKET AND WIRE THEM TOGETHER.
2. ADD WIRE FROM I/C IN LOCATION 2-B PINS # 3, 4 & 5 TO PIN # 8
3. I/C IN LOCATION C-6 ADD WIRE FROM PIN # 12 TO PIN # 18
4. I/C IN LOCATION C-6 ADD WIRE FROM PIN # 21 TO PIN # 24

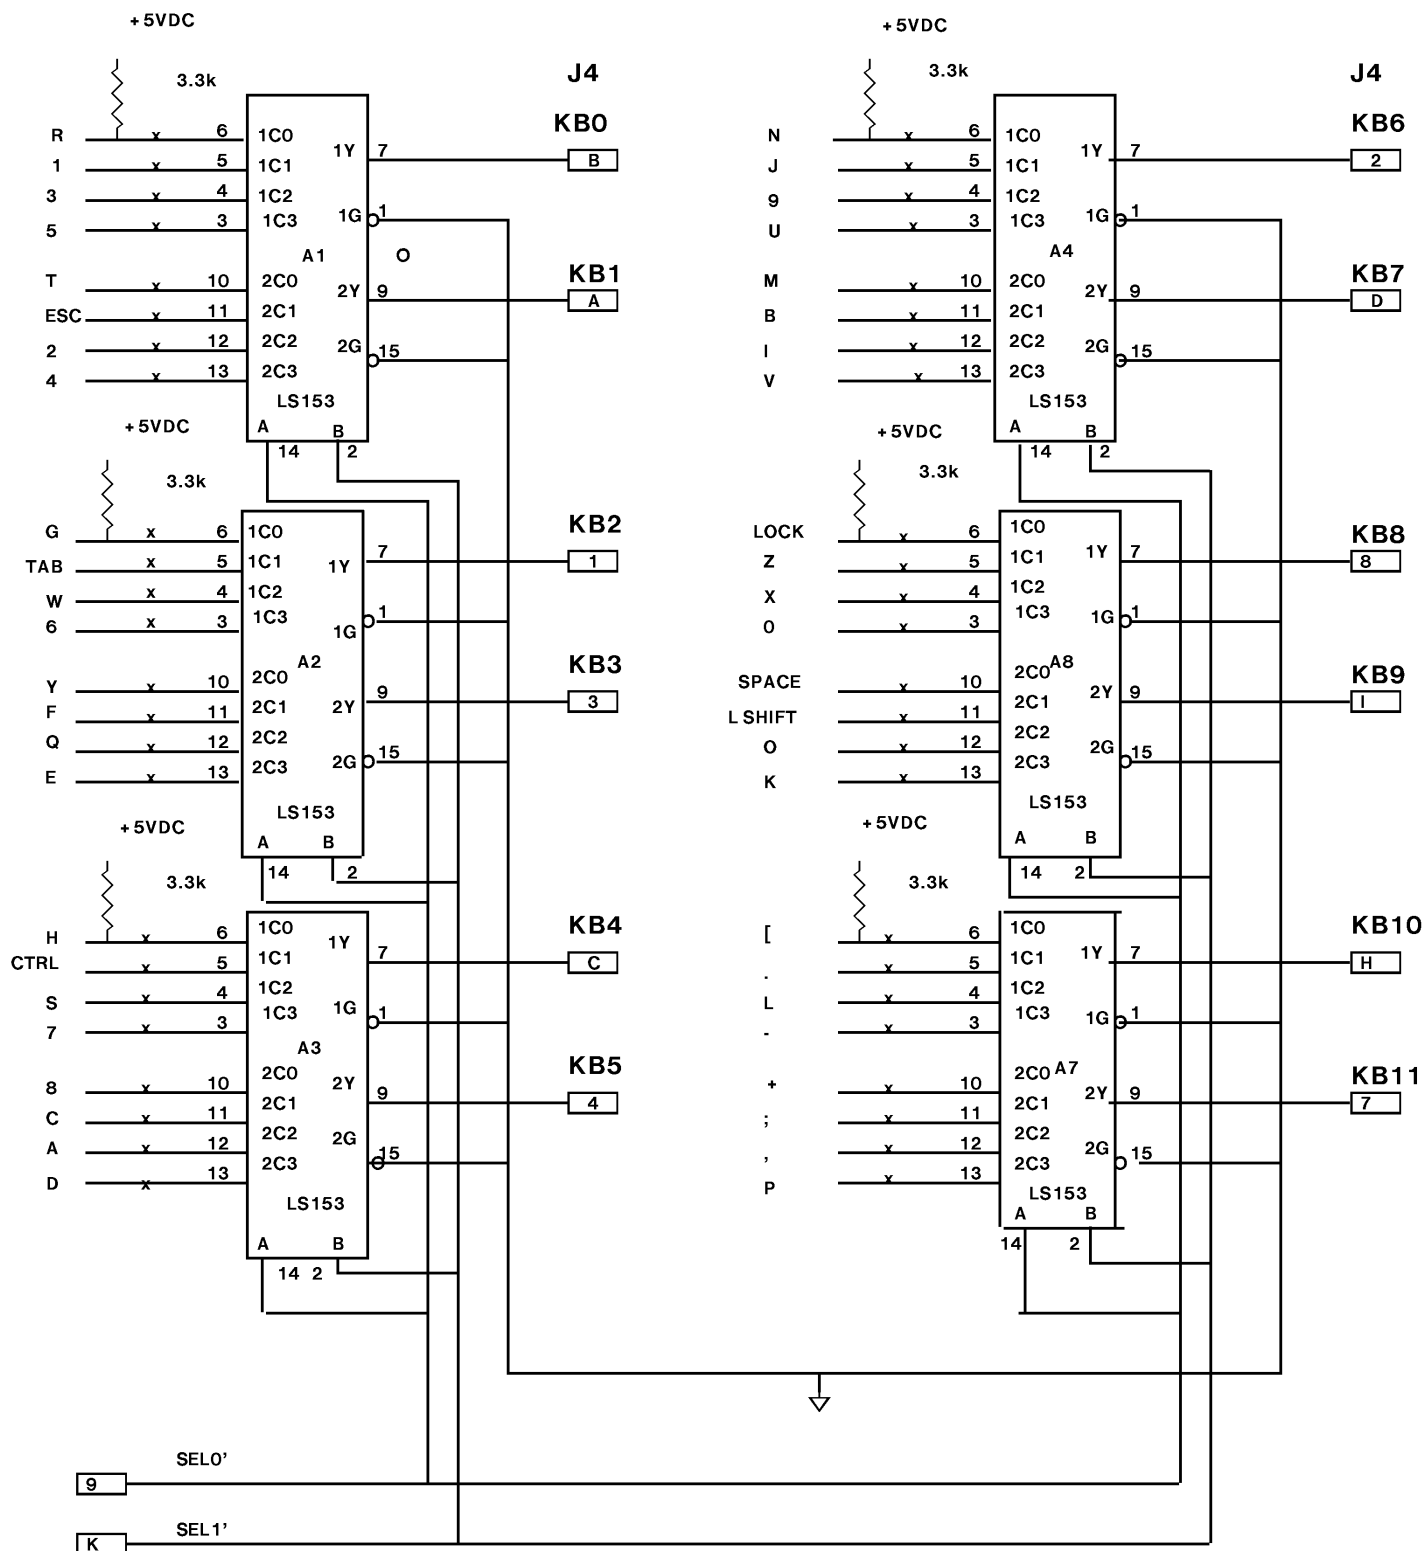

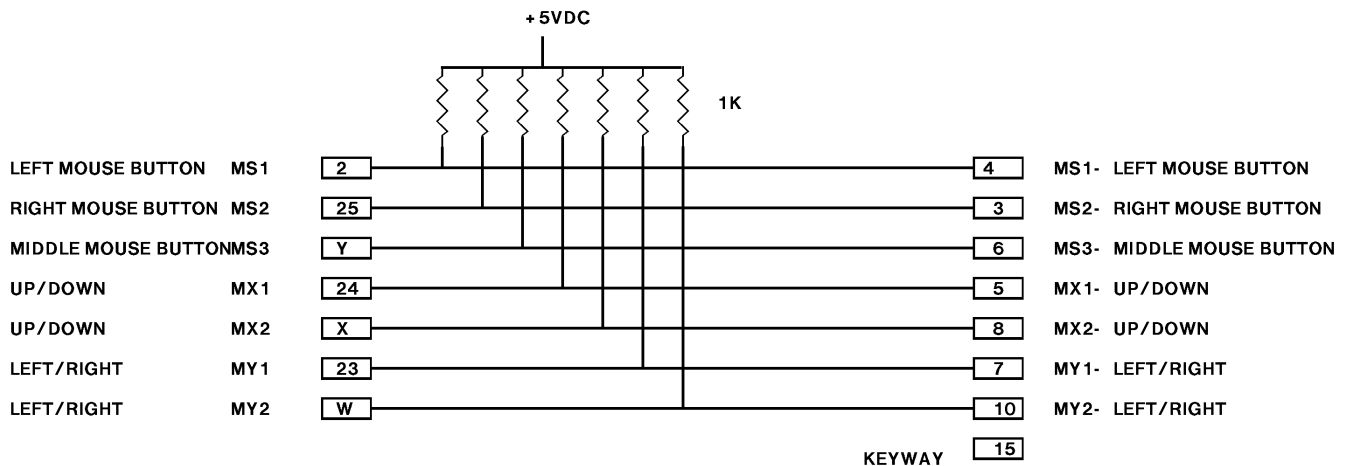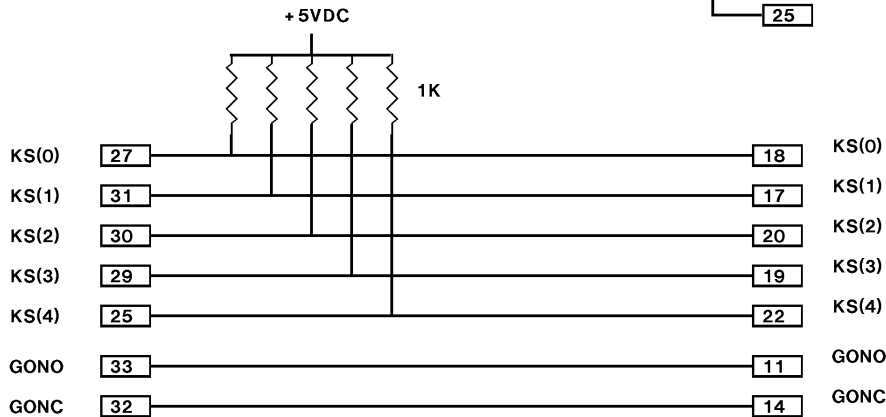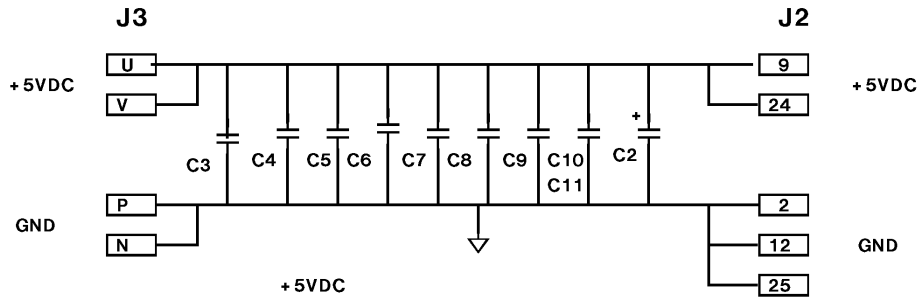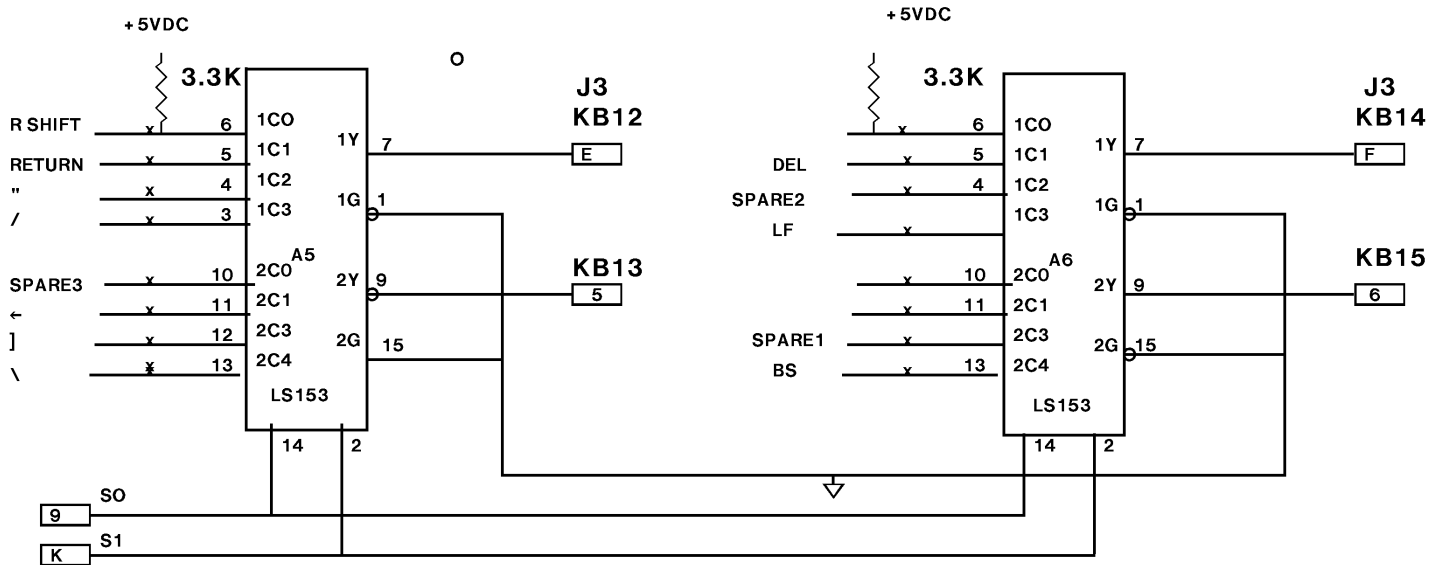


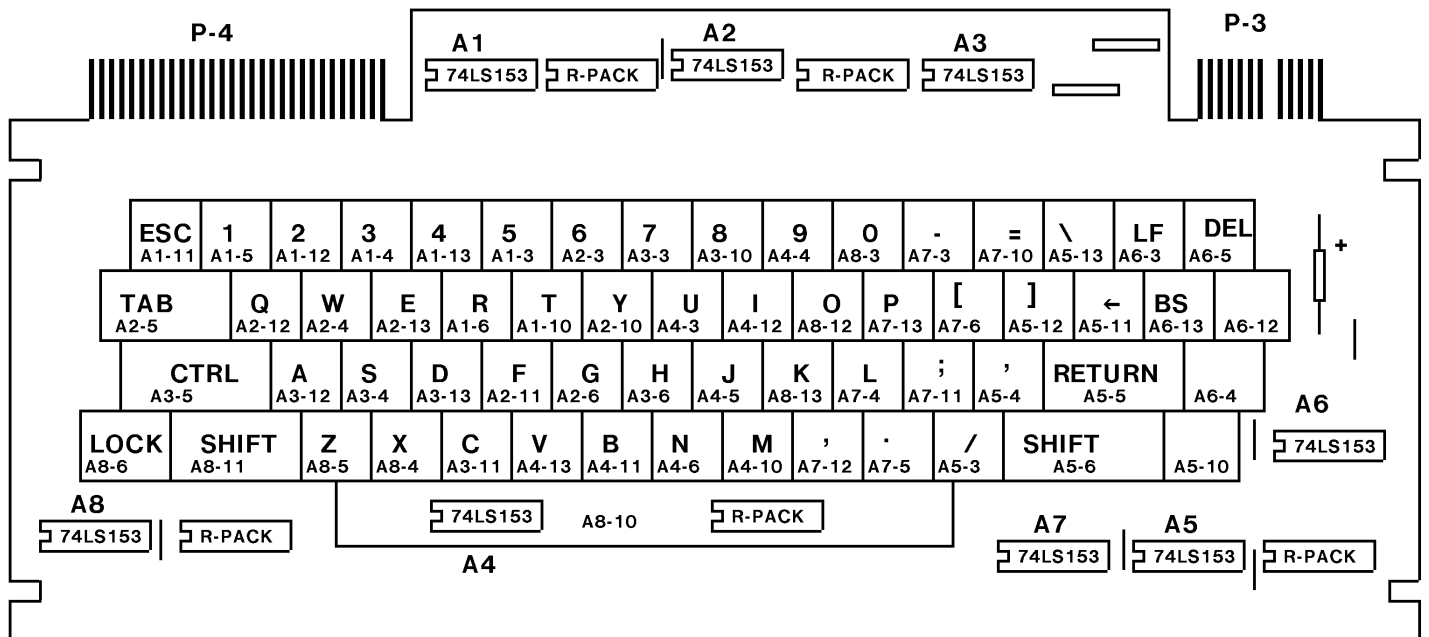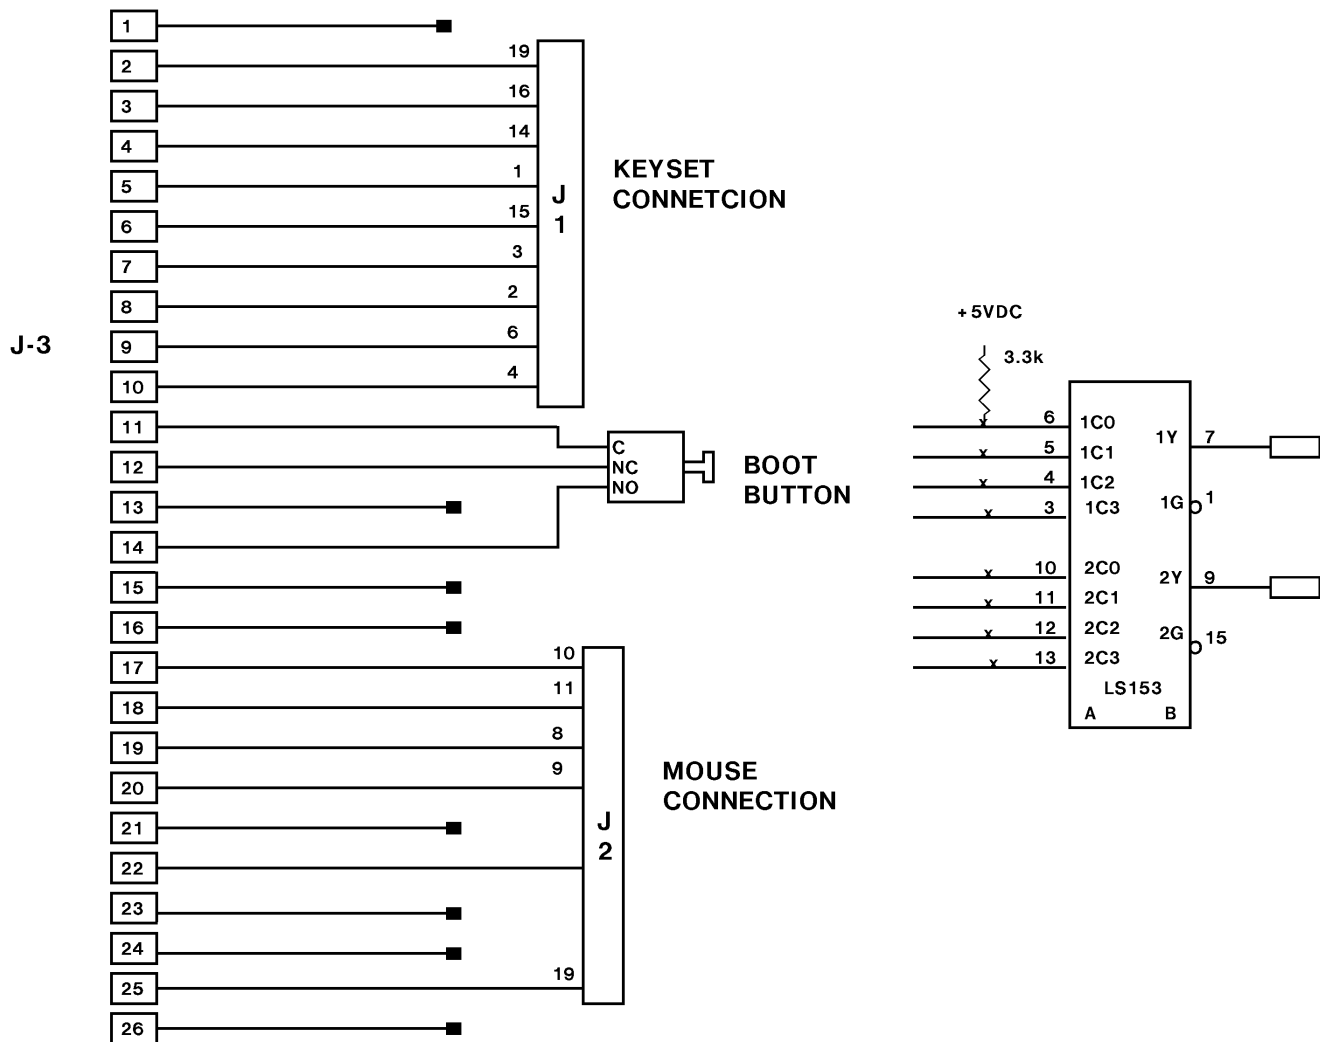

37-Pin
MALE
D-Shell connector
With Rear entry Hood
and Sliding lock retainer

50-Pin
Card Edge Connector

AMP P/N 1-583717-1 (Housing)
AMP P/N 583854-3 or
583854-5 (Contact - 50 reqd.)
(contacts are solder cup)

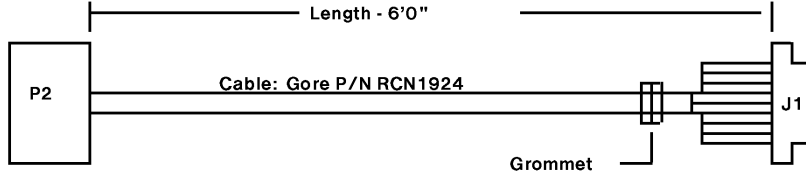

KEYBOARD J1	7-WIRE INTERFACE P1	KEYBOARD J1	7-WIRE INTERFACE P1
1	27 BLU	U	1 W (20 GAUGE-LARGE WIRE)
2	9 Y	N	2 BLK (20 GAUGE-LARGE WIRE)
3	26 Y/BR	B	3 VIO
4	13 Y/R	A	4 Y/BLK
5	14 Y/VIO	8	5 O
6	36 Y/GRY	J	6 Y/GRN
7	24 Y/BLU	14	7 O/BLK
8	5 O	16	8 O/BRN
9	28 GRY	2	9 Y
13	35 O/VIO	F	10 BLK (26 GAUGE-SMALL WIRE)
14	7 O/BLK	25	11 W/BRN
15	22 O/BLU	23	12 W/GRN
16	8 O/BRN	4	13 Y/R
17	31 BLU/BLK	5	14 Y/VIO
23	12 W/GRN	Z	15 W/BLK
24	33 W/YEL	X	16 W/O
25	11 W/BRN	C	17 GRN
A	4 Y/BLK	D	18 Y/O
B	3 VIO	V	20 O/GRN
C	17 GRN	P	21 W/VIO
D	18 Y/O	15	22 O/BLU
E	37 BRN	S	23 O/R
F	10 BLK (26 GAUGE-SMALL WIRE)	7	24 Y/BLU
H	25 R	H	25 R
J	6 Y/GRN	3	26 Y/BR
K	29 W (26 GAUGE-SMALL WIRE)	1	27 BLU
N	2 BLK (20 GAUGE-LARGE WIRE)	9	28 GRY
P	21 W/VIO	K	29 W (26 GAUGE-SMALL WIRE)
S	23 O/R	T	30 BLU/BRN
T	30 BLU/BRN	17	31 BLU/BLK
U	1 W (20 GAUGE-LARGE WIRE)	W	32 W/BLU
V	20 O/GRN	24	33 W/YEL
W	32 W/BLU	Y	34 W/R
X	16 W/O	13	35 O/VIO
Y	34 W/R	6	36 Y/GRY
Z	15 W/BLK	E	37 BRN

NOTES:

1. CABLE IS 6 FT. LONG +/- 4IN.
2. W/GRY WIRE IS CUT OFF
3. O/GRY WIRE IS CUT OFF
4. CABLE IS (GORE PN # RCN1924)

XEROX CSL	Project GARAGE	EXTERNAL KEYBOARD CABLE	File KEYCABLE.SIL	Designer VEST	Rev A	Date 8/2/79	Page 1
----------------------	-------------------	-------------------------	----------------------	------------------	----------	----------------	-----------