


Efficiency Curve


BCS1250K-C-HUD

Efficiency data @ Self-powered,25℃

Load ratio		0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
1060Vdc	charging	98.26%	98.80%	98.84%	98.86%	98.81%	98.76%	98.69%	98.60%	98.49%	98.39%
	discharging	98.01%	98.56%	98.63%	98.66%	98.59%	98.56%	98.50%	98.42%	98.32%	98.21%
1250Vdc	charging	97.91%	98.65%	98.75%	98.76%	98.74%	98.69%	98.62%	98.53%	98.42%	98.31%
	discharging	97.55%	98.32%	98.49%	98.53%	98.51%	98.47%	98.42%	98.34%	98.25%	98.14%
1450Vdc	charging	97.56%	98.48%	98.64%	98.71%	98.69%	98.65%	98.58%	98.49%	98.38%	98.27%
	discharging	97.39%	98.22%	98.37%	98.47%	98.42%	98.41%	98.35%	98.27%	98.18%	98.08%

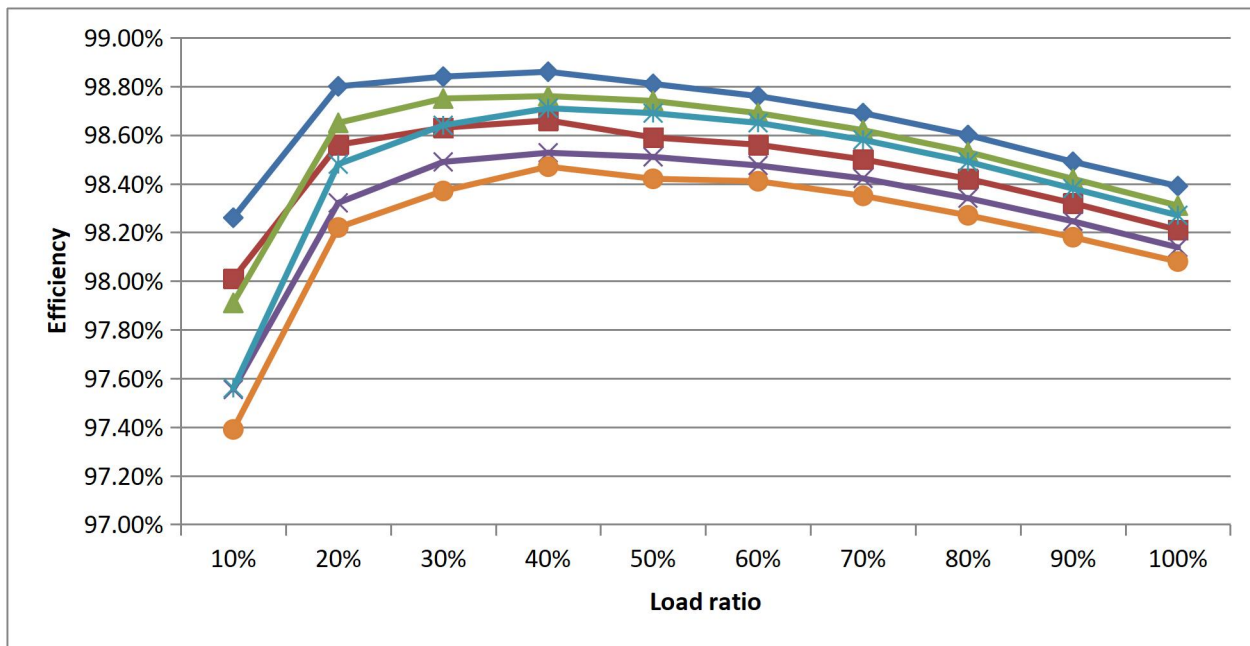

Efficiency data @ External power,25℃											
Load ratio		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
1060Vdc	charging	98.46%	98.90%	98.97%	98.96%	98.90%	98.84%	98.76%	98.67%	98.57%	98.46%
	discharging	98.25%	98.67%	98.74%	98.75%	98.69%	98.64%	98.57%	98.49%	98.39%	98.28%
1250Vdc	charging	98.01%	98.70%	98.83%	98.85%	98.81%	98.76%	98.69%	98.60%	98.50%	98.39%
	discharging	97.82%	98.46%	98.58%	98.62%	98.58%	98.54%	98.48%	98.40%	98.31%	98.21%
1450Vdc	charging	97.81%	98.61%	98.76%	98.79%	98.77%	98.72%	98.65%	98.56%	98.46%	98.35%
	discharging	97.65%	98.37%	98.52%	98.55%	98.51%	98.48%	98.43%	98.36%	98.27%	98.17%

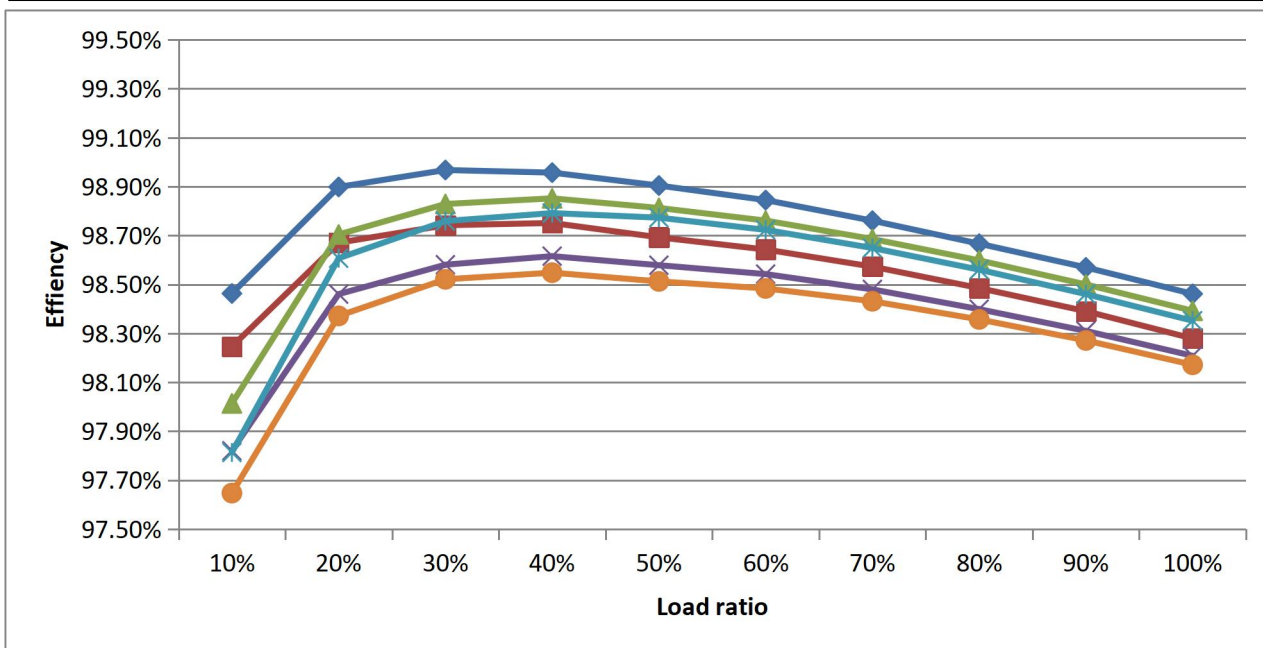

- END -

XIAMEN KEHUA DIGITAL ENERGY TECH CO.,LTD
ADD:ROOM 208-38, HENGYE BUILDING, NO.100 XIANGXING ROAD, TORCH HIGH-TECH ZONE
(XIANGAN) INDUSTRIAL ZONE, XIAMEN,CHINA
Tel: +86-592-5160516
Fax: +86-592-5162166
Email: Intertrade@kehua.com