SB ACOUSTICS

SB26STC-C000-4 / OEM Only

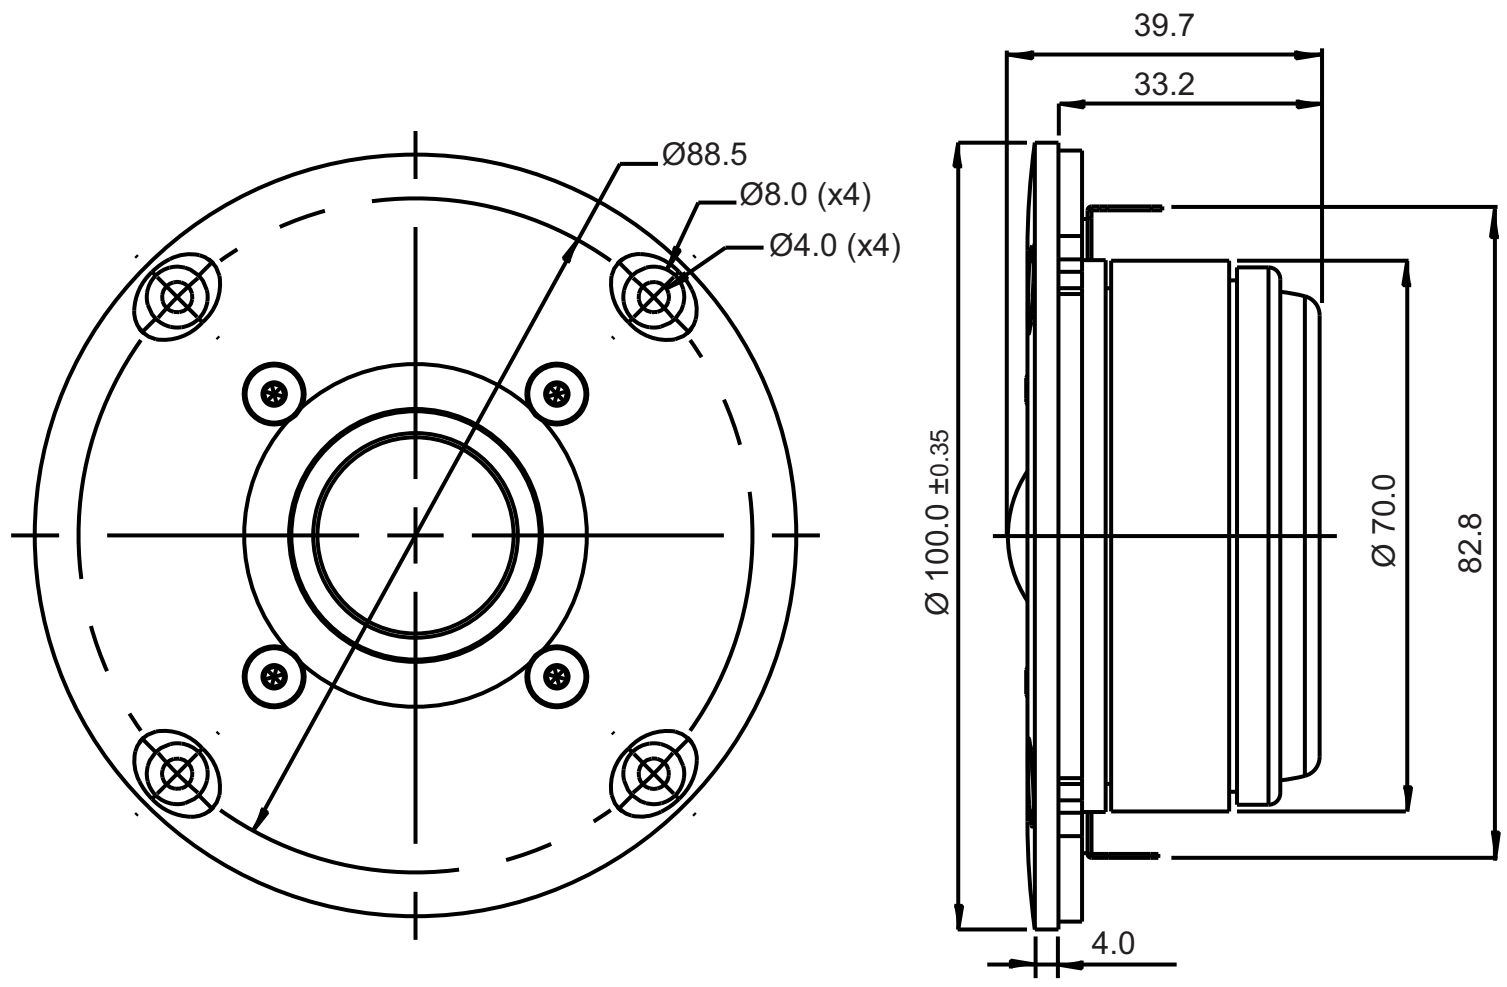

FEATURES

- Copper cap for reduced voice coil inductance and minimum phase shift
- Non-reflective rear chamber with optimized damping for improved dynamics
- Flow optimized vented pole piece for optimum coupling to rear chamber
- Fine weave soft fabric dome for smooth frequency response
- Saturation controlled motor system for low distortion
- CCAW voice coil for low moving mass
- Long life silver lead wires
- Low resonance frequency

Specs :

Nominal Impedance	4 Ω	Free air resonance, Fs	750 Hz
DC resistance, Re	3.2 Ω	Sensitivity (2.83 V / 1 m)	91.5 dB
Voice coil inductance, Le	0.04 mH	Mechanical Q-factor, Qms	3.0
Effective piston area, Sd	6.2 cm^2	Electrical Q-factor, Qes	1.78
Voice coil diameter	25.4 mm	Total Q-factor, Qts	1.12
Voice coil height	1.3 mm	Force factor, Bl	1.6 Tm
Air gap height	2.5 mm	Rated power handling*	120 W
Linear coil travel (p-p)	1.2 mm	Magnetic flux density	1.15 T
Moving mass incl. air, Mms	0.3 g	Magnet weight	0.22 kg
		Net weight	0.53 kg

* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct.

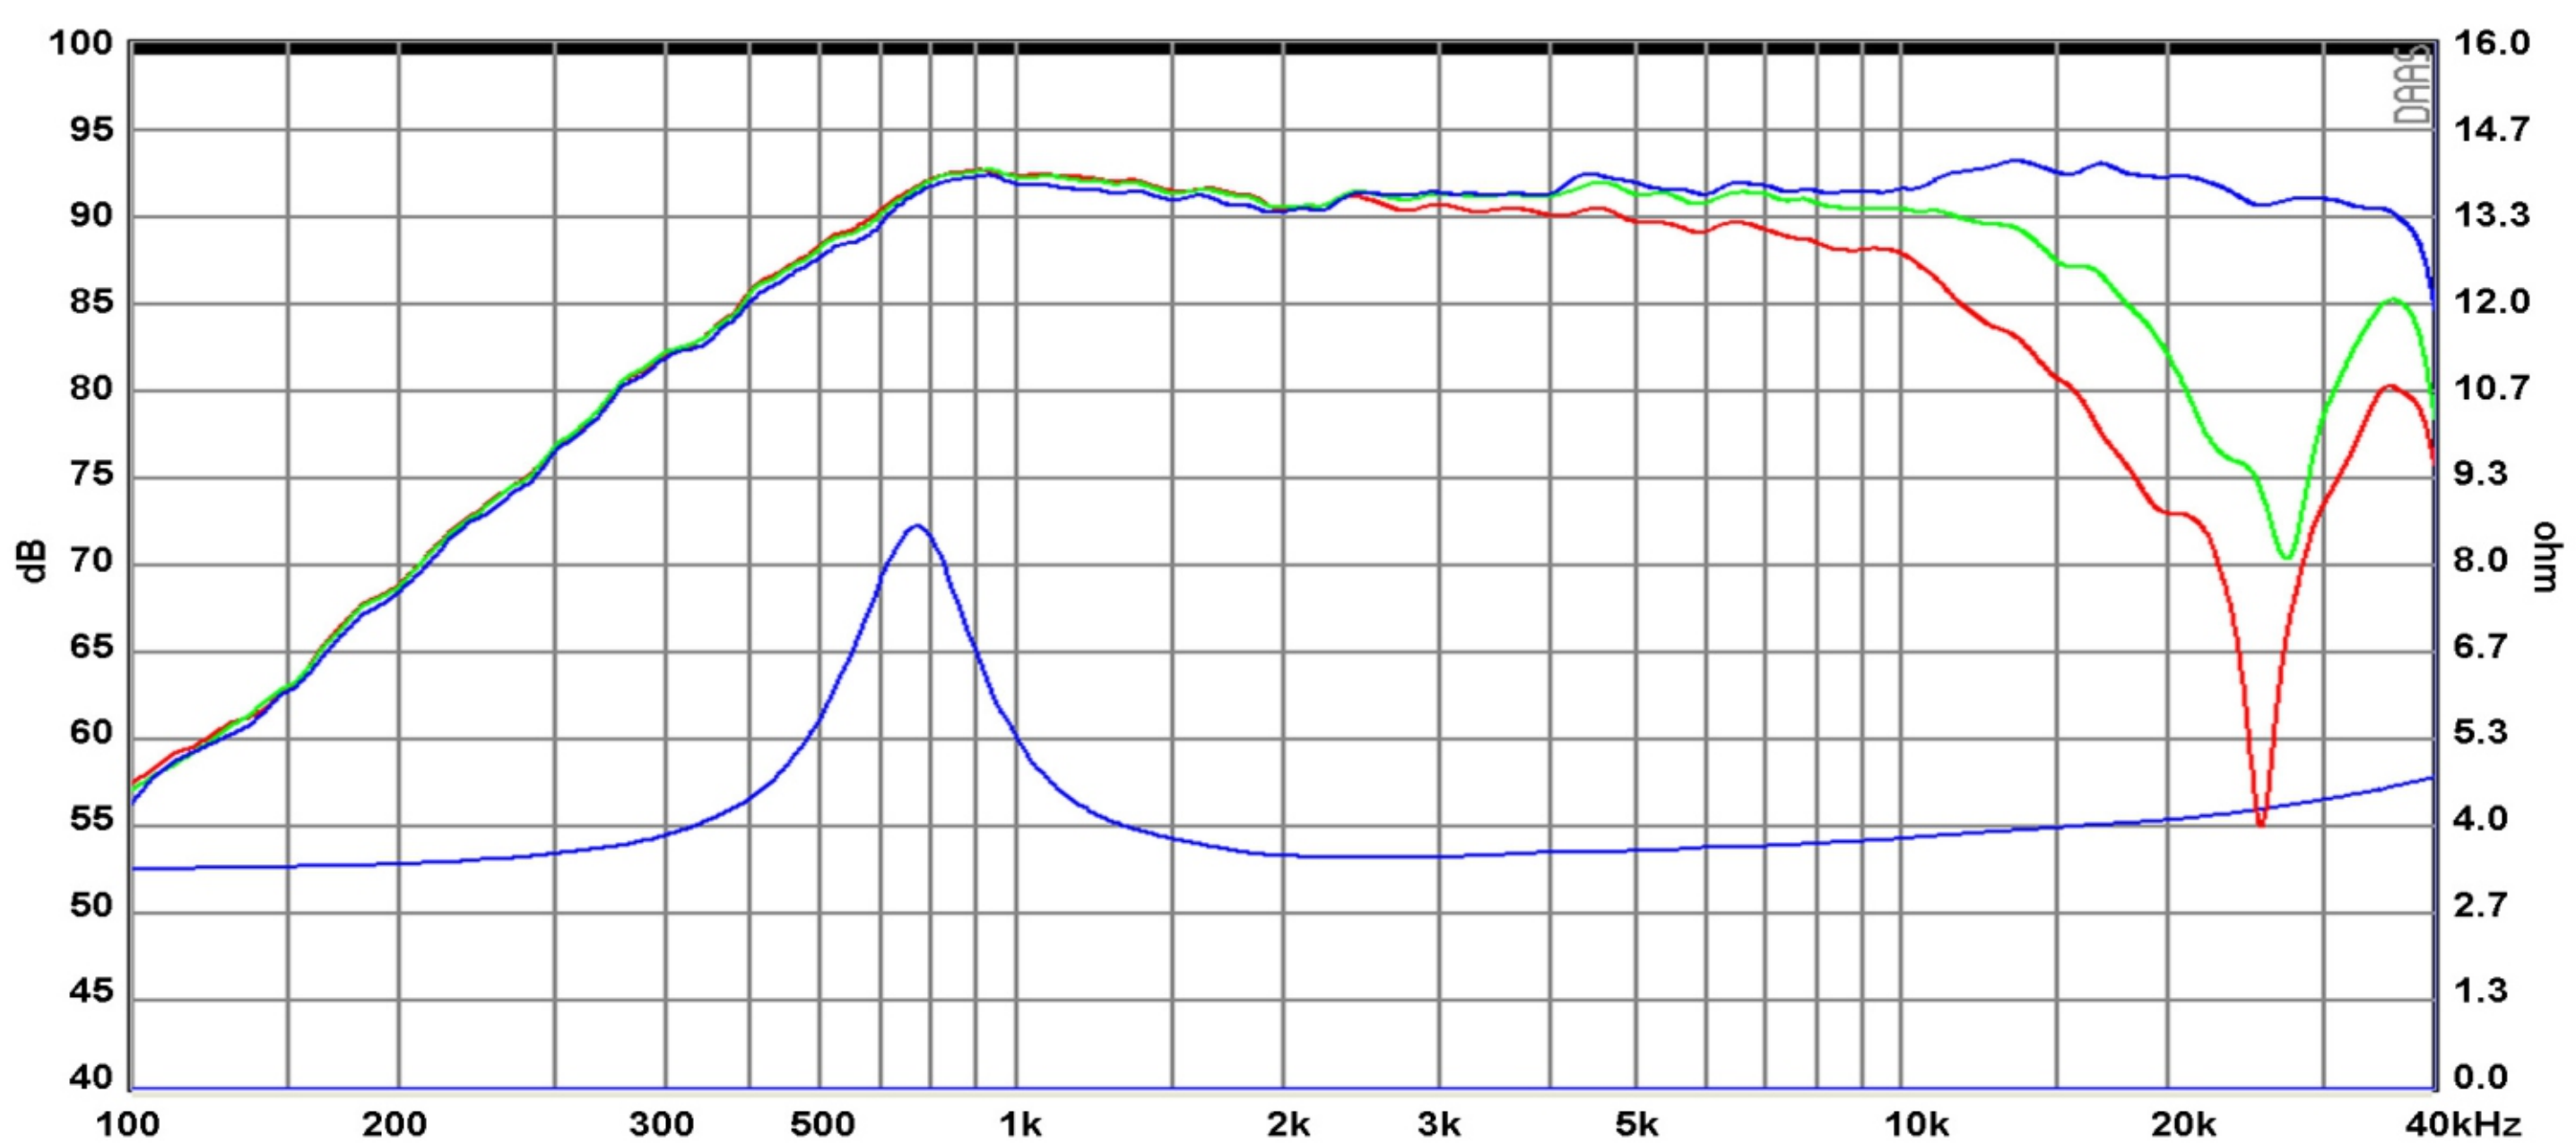

(IEC baffle, mic. distance 31.6 cm, SPL shown for 2.83 V / 1 m)

Response Curve :

------ (Blue) : on axis ------ (Green) : 30° off-axis ------ (Red) : 60° off-axis