


HORN H225

Horn - 1" 90°(H) x 70°(V)

AUDIENCE

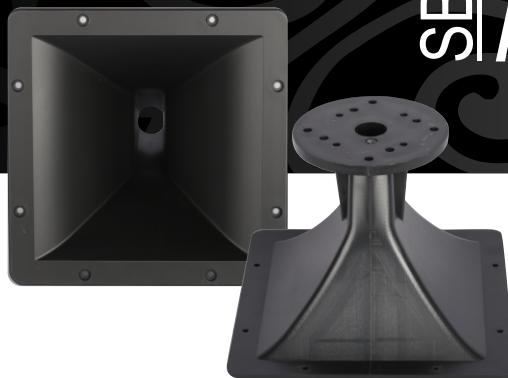

- 1" Throat entry
- 90° x 70° nominal coverage
- Excellent loading down to 600 Hz
- Constant directivity

Dimensions & Weight

Horn material	ABS Plastic
Horn finish	Black
Overall dimensions	
Mouth height	223.5 mm (8.80 in)
Mouth width	223.5 mm (8.80 in)
Length	161 mm (6.33 in)
Net weight	0.58 kg (1.27 lb)
Gross weight	0.7 kg (1.54 lb)
Carton dimensions (W x D x H)	256 x 256 x 170 mm (10.07 x 10.07 x 6.69 in)

Mounting information


Mechanical connection of driver	Bolt on
Baffle cutout dimensions (front mount)	
Horizontal	184.5 mm (7.26 in)
Vertical	181 mm (7.12 in)

NOTES :


- (1) Measured with BIANCO-44CD-PK driver, 1kHz - 15kHz average
- (2) Measured with BIANCO-44CD-PK driver
- (3) With BIANCO-44CD-PK driver

Specs :



Nominal coverage	
Horizontal	90 degrees
Vertical	70 degrees
Directivity	
Directivity factor (Q)	8
Directivity index (Di)	9 dB
Sensitivity	
On driver.1W@1m, on axis ¹	109 dB
Frequency response @-10dB ²	600 Hz - 20 kHz
Nominal throat diameter	25.4 mm (1 in)
Minimum recommended crossover ³	700 Hz

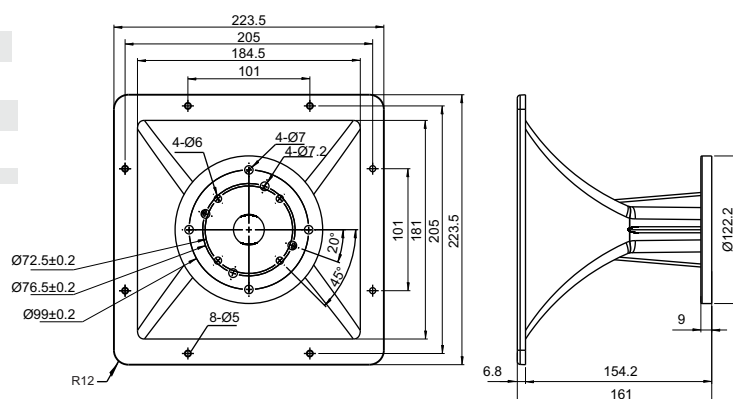

HORIZONTAL POLAR PATTERN

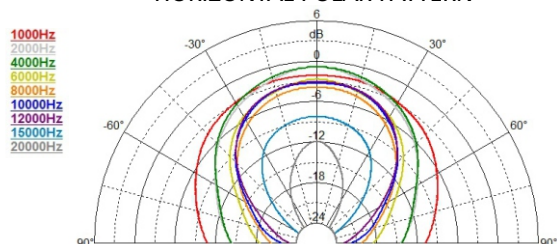

VERTICAL POLAR PATTERN

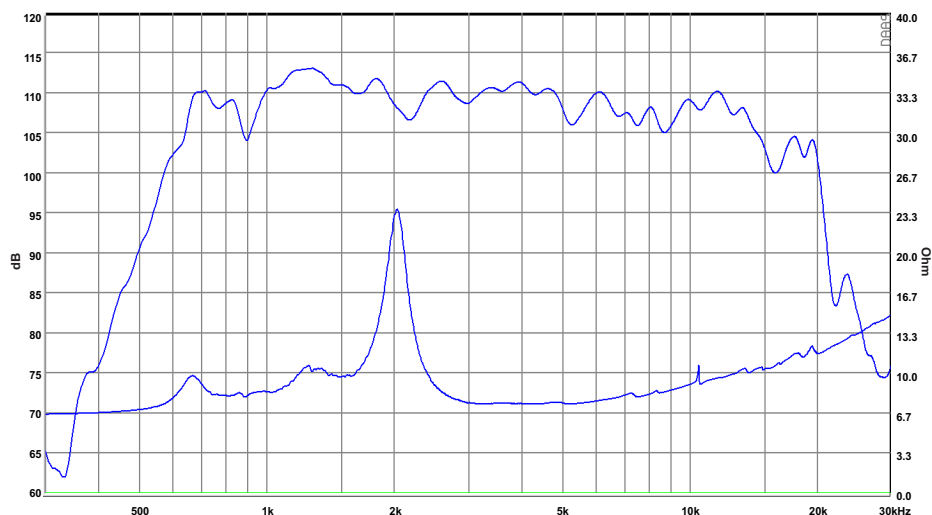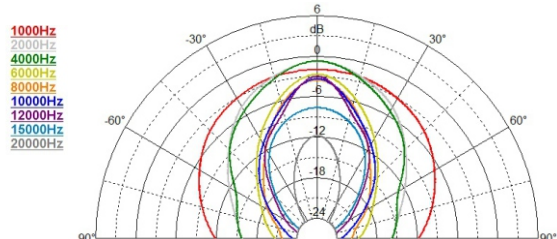

RESPONSE AND IMPEDANCE CURVES WITH BIANCO-44CD-PK DRIVER, 1 W/1M