


10" PA-10880-MK II EXCEL

Excellent Series By ACR | 10 Inch - Woofer

ACR®
www.acrspeaker.com

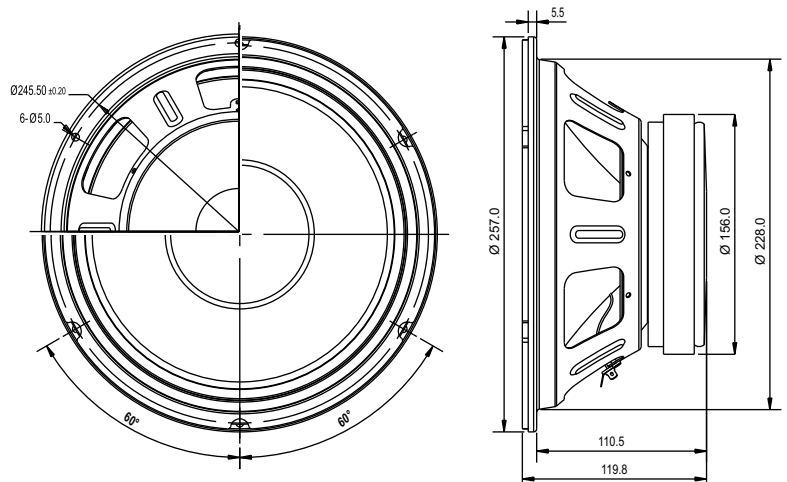

Fitur

1. Daya Magnet Optimal

- Daya motor *magnet speaker* yang optimal karena didesain dengan menggunakan teknologi *FEA (Finite Element Analysis)*

2. Weatherproof

- Conepaper yang kokoh dilapisi dengan *black coating* menjadikan tahan terhadap segala cuaca


Spesifikasi

Diameter Speaker (inch/mm)	10 inch / 254 mm
Impedansi (Ω)	8 Ω
Nominal power handling (Watt) ¹	250 Watt
Program power (Watt) ²	500 Watt
Lebar daerah frekuensi (Hz)	60 Hz - 6400 Hz
SPL (2.83 V / 1 m) (dB)	97 dB
Diameter cone efektif (mm)	216 mm
Medan magnet (T)	1.10 T
Berat magnet (Kg/Oz)	1.44 kg / 50.40 Oz
Voice coil diameter (mm)	60.55 mm
Voice coil material	Kapton


- (¹) AES standard, test mode with continuous pink noise signal (6 dB crest factor; 2 hours) within the Fo to 10Fo power calculated on rated nominal impedance. Loudspeaker in free air

- (²) Power on continuous program is defined as 3dB greater than nominal power handling.

Respon Frekuensi

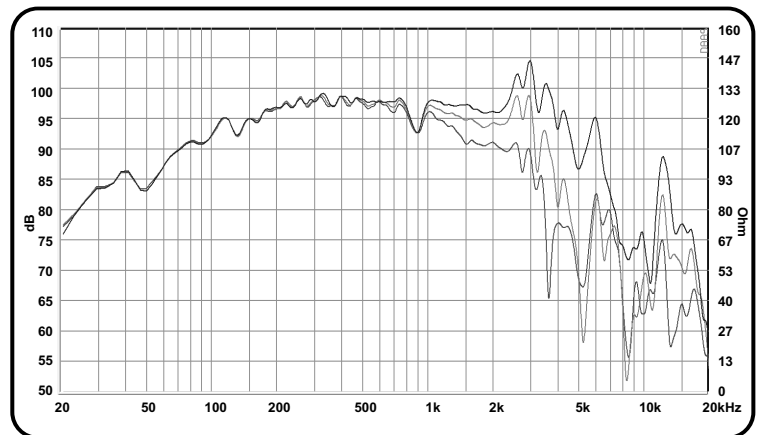


Impedansi

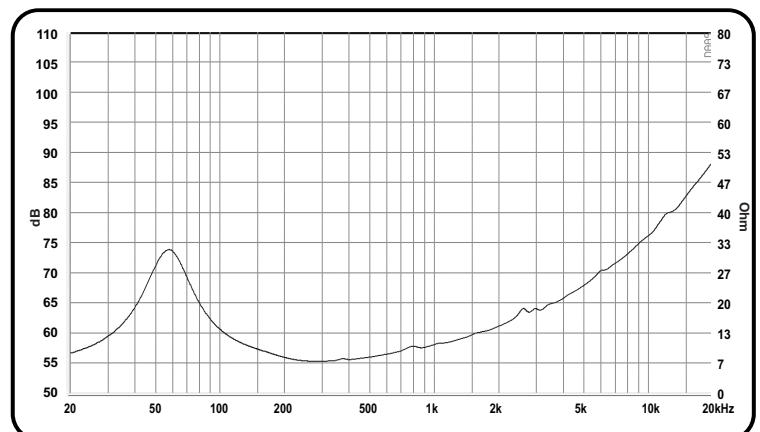

Parameter "Thiele-Small"


Frekuensi Resonansi / Fs (Hz)	60 Hz
DCR (Ω)	5.7 Ω
Qts	0.33
Qes	0.41
Qms	1.86
Mms (g)	36.4 g
Cms (mm/N)	0.21 mm/N
BL Product (Tm)	13.6 Tm
Vas (liters)	39.3 liters
No (%)	1.80 %
Sd (cm²)	366.4 cm²
Xmax (mm)	6.2 mm

Respon Bass

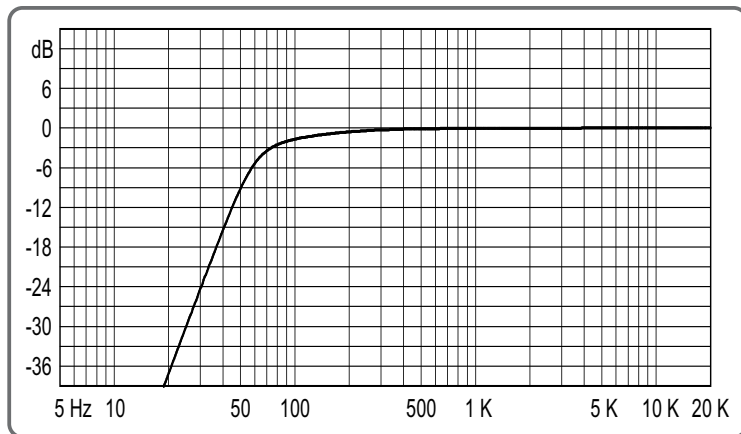

Referensi Box Speaker

Dimensi luar 37 Lt pada Fb 58.8 Hz
Tebal material 12 mm

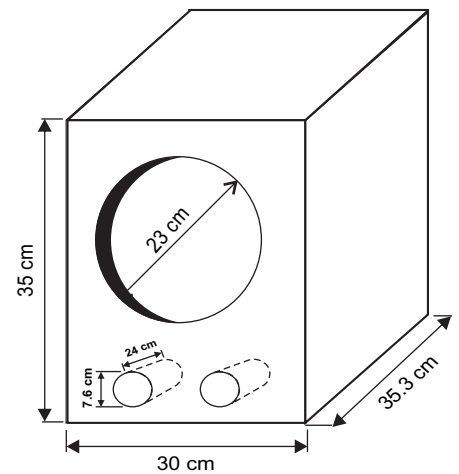

Showroom

Surabaya : Jl. Margomulyo No. 5, Tandes - Surabaya.
Telp. +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F no. 97 RT 06/RW 06 Mangga Besar - Jakarta Barat
Telp. : +62-21 30525443, 6493139, Fax. : +62-21 6493171