

HW0001382

Specification:

- Brand new
- Wheel diameter: approx. 65mm
- Shaft diameter: approx. 4mm
- Voltage: DC 6V
- Speed: 210 rpm
- Encoder motor end: 11 signals
- Rated voltage: DC 6V
- No-load speed: 210RPM 0.13A
- Max efficiency: 2.0kg.cm/170rpm/2.0W/0.60A
- Max power: 5.2kg.cm/110rpm/3.1W/1.10A
- Stall torque: 10kg.cm 3.2A
- Retarder reduction ratio: 1 : 34
- Hall resolution: hall x ratio 34.02 = 341.2PPR
- Terminal connection length: approx. 200mm
- Quantity: 1 set / 2 set
- Fine workmanship.
- Easy to install and use.


Package included: (depend on your optional)

- 1/2pcs x encoder motor
- 1/2pcs x wheel
- 1/2pcs x bracket mount
- 1/2pcs x coupling
- 1/2 set x installation screws

Note:

- Please allow 1-5mm errors due to manual measurement.
- Item color displayed in photos may be showing slightly different on your computer monitor since monitors are not calibrated same.



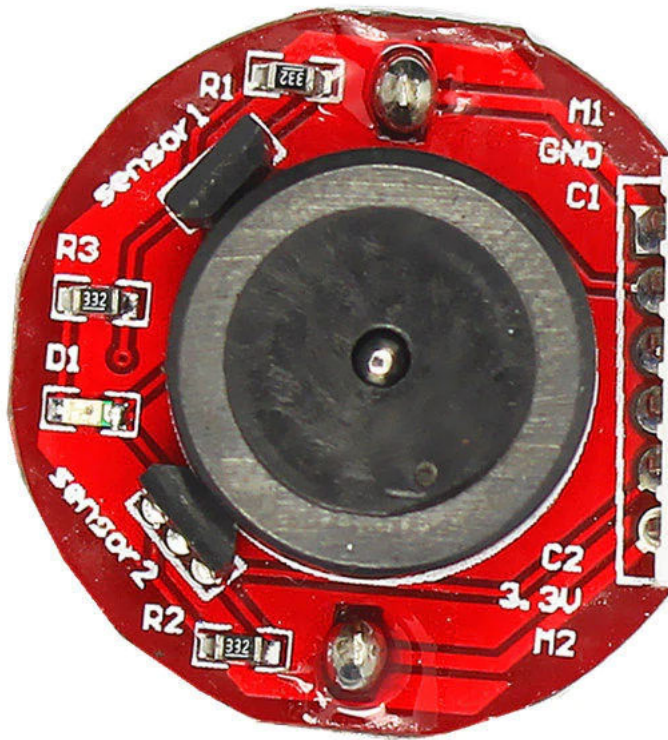

- 1-M1 motor —
- 2-GND Encoder
- 3-Encoder A ph
- 4-Encoder B ph
- 5-3V3 Encoder
- 6-M1 motor +

payment