

# Home Work #2

Ali BaniAsad 96108378

October 15, 2021

## 1 Question 1

$$G(s) = \frac{50(s + 0.5)}{(s + 1)(s + 1.5)^3(s + 2)}$$

Steady state error:

$$e_{ss} = \lim_{s \rightarrow 0} s \times \frac{1}{G(s) + 1} R(s)$$

When input is step  $R(s)$  is  $\frac{1}{s}$ .

$$e_{ss} = \lim_{s \rightarrow 0} \frac{1}{G(s) + 1}$$

### 1.1 lead compensation

$$G_c(s) = K_c \frac{s + \frac{1}{T}}{s + \frac{1}{\alpha T}}, \quad 0 < \alpha < 1$$

$$G_c(s) = K_c \alpha \frac{Ts + 1}{\alpha Ts + 1}$$

Define:

$$K_c \alpha = K$$

then:

$$G_c(s) = K \frac{Ts + 1}{\alpha Ts + 1}$$

The open-loop transfer function of the compensated system is:

$$G_c(s)G(s) = G_c(s) = K \frac{Ts + 1}{\alpha Ts + 1} G(s) = G_c(s) = \frac{Ts + 1}{\alpha Ts + 1} KG(s) = G_c(s) = \frac{Ts + 1}{\alpha Ts + 1} G_1(s)$$

Where:

$$KG(s) = G_1(s)$$

Steady state error must be less than 0.05%

$$e_{ss} = \lim_{s \rightarrow 0} \frac{1}{1 + G_1(0)} = 0.05 \rightarrow 0.05 + 0.05G_1(0) = 1 \rightarrow 0.95 = 0.05G_1(0) \rightarrow G_1(0) = 19$$

$$\lim_{s \rightarrow 0} G(s) = \lim_{s \rightarrow 0} \frac{50(s + 0.5)}{(s + 1)(s + 1.5)^3(s + 2)} = \frac{50 \times 0.5}{1 \times 1.5^3 \times 2} = 3.7037 \xrightarrow[G_1=KG]{G_1(0)=19} K = 5.1300$$

The amplitude ratio:

$$|G_1(j\omega)| = |KG(j\omega)| = 5.1300 \frac{50\sqrt{\omega^2 + 0.5^2}}{\sqrt{\omega^2 + 1^2} \times (\sqrt{\omega^2 + 1.5^2})^3 \times \sqrt{\omega^2 + 2^2}}$$

Gain Crossover frequency:

$$|G_1(j\omega_g)| = 1$$

$$5.1300 \frac{50\sqrt{\omega_g^2 + 0.5^2}}{\sqrt{\omega_g^2 + 1^2} \times (\sqrt{\omega_g^2 + 1.5^2})^3 \times \sqrt{\omega_g^2 + 2^2}} = 1$$

$$26.3169 \times 2500(\omega_g^2 + 0.25) = (\omega_g^2 + 1)(\omega_g^2 + 2.25)^3(\omega_g^2 + 4)$$

This equation solved with MATLAB and code has attacked (Q1.a.m).

$$\omega_g = 3.6233$$

The phase angle:

$$\angle G(j\omega) = 0^\circ + \tan^{-1} \frac{\omega}{0.5} - \tan^{-1} \frac{\omega}{1} - 3 \tan^{-1} \frac{\omega}{1.5} - \tan^{-1} \frac{\omega}{2}$$


$$\angle G(j\omega_g) = \tan^{-1} \frac{3.6233}{0.5} - \tan^{-1} \frac{3.6233}{1} - 3 \tan^{-1} \frac{3.6233}{1.5} - \tan^{-1} \frac{3.6233}{2} = -4.46917_{rad} = -256.064^\circ$$

Phase margin:

$$\gamma = 180 + \angle G(j\omega_g) = 180 - 256.064 = -76.064$$

Now we check above calculation with MATLAB margin function.

Figure 1: Bode digram using MATLAB

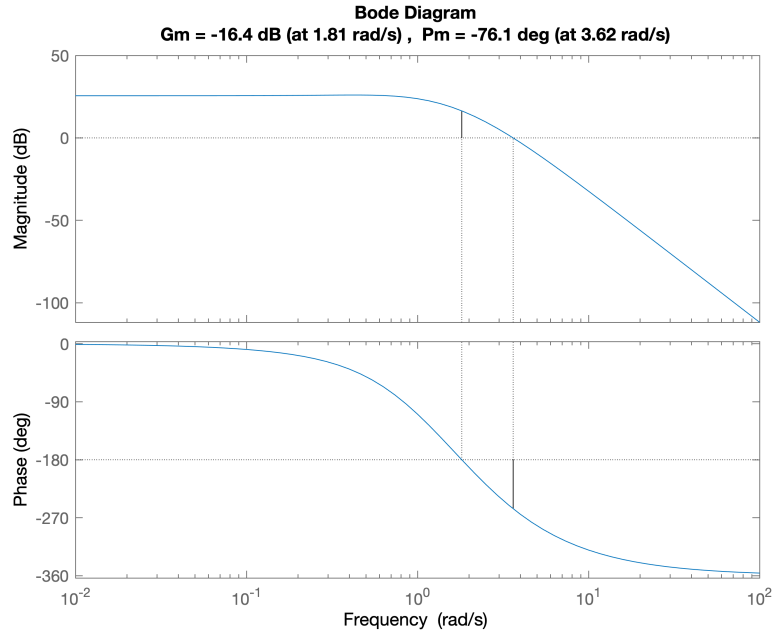

MATLAB bode digram and our calculation are exactly the same.

$$\bar{\gamma} = 45 + 5 = 50^\circ, \quad \phi_m = \bar{\gamma} - \gamma = 126.0646^\circ.$$

$$\phi_m = 85^\circ$$

This is too much! best we can do is about  $90^\circ$  in lead compensation so we add  $85^\circ$

$$\sin(\phi_m) = \frac{1 - \alpha}{1 + \alpha} \rightarrow \alpha = \frac{1 - \sin(\phi_m)}{1 + \sin(\phi_m)} = 0.0019$$

$\alpha$  is very low.

$$K_c = \frac{K}{\alpha} = \frac{5.1300}{0.0019} = 2691.1$$

$$|G_1(j\omega_m)| = \sqrt{\alpha} = |KG(j\omega_m)| = 5.13 \frac{50\sqrt{\omega_m^2 + 0.5^2}}{\sqrt{\omega_m^2 + 1^2} \times (\sqrt{\omega_m^2 + 1.5^2})^3 \times \sqrt{\omega_m^2 + 2^2}} = 0.0019$$

This equation solved with MATLAB and code has attacked (Q1.a.m).


$$\omega_m = 8.58898$$

$$\omega_m = \frac{1}{T\sqrt{\alpha}} \rightarrow T = \frac{1}{\omega_m\sqrt{\alpha}} = \frac{1}{8.58898\sqrt{0.0019}} = 2.6666$$

$$G_c(s) = K_c \frac{s + \frac{1}{T}}{s + \frac{1}{\alpha T}} = 5.1300 \frac{s + 0.3750}{s + 196.720}$$

Bode digram for lead compensation using MATLAB.

Figure 2: Controller Bode digram using MATLAB

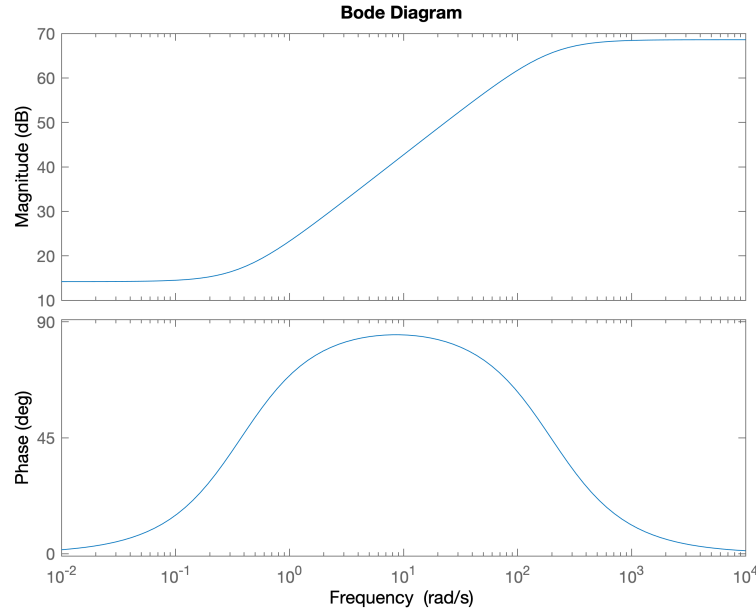


Now add lead controller to system.

$$G_c(s)G(s) = 5.1300 \frac{s + 0.3750}{s + 196.720} \frac{50(s + 0.5)}{(s + 1)(s + 1.5)^3(s + 2)}$$


Bode digram for system with adding lead compensation.

Figure 3: Bode digram for system with lead compensation using MATLAB

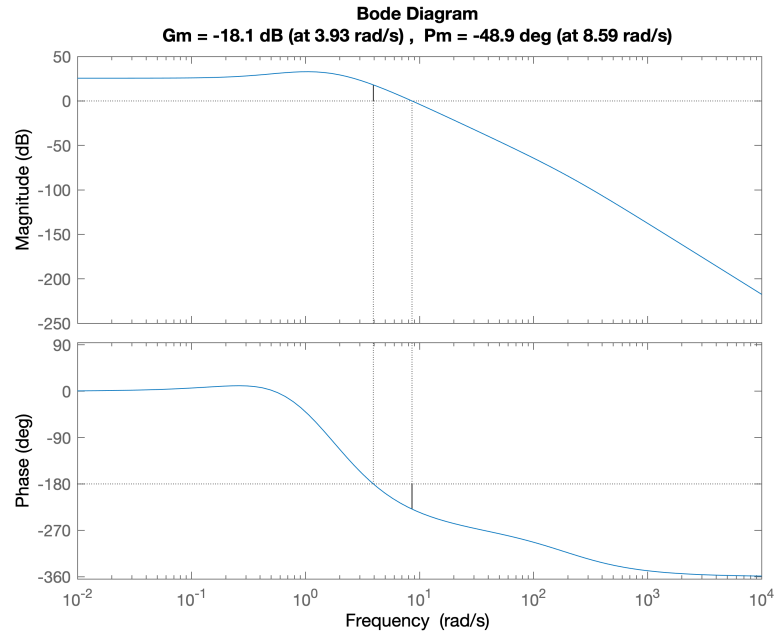

That was the best we can do with lead compensation! all bode digram in one figure:

Figure 4: all bode digram using MATLAB

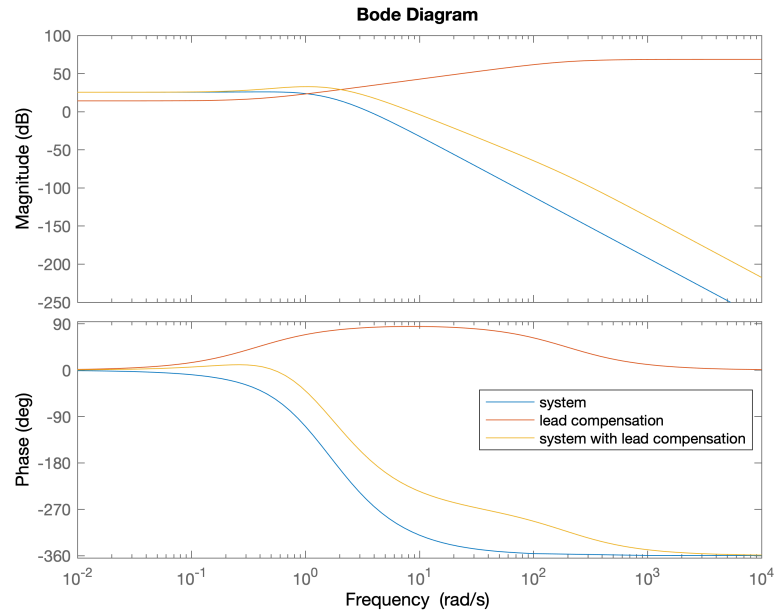

## 1.2 lag compensation

$$G_c(s) = K_c \frac{s + \frac{1}{T}}{s + \frac{1}{\beta T}}, \quad \beta > 1$$

## Contents

<b>1</b>		<b>1</b>
1.1	lead compensation . . . . .	1
1.2	lag compensation . . . . .	5

**List of Figures**

1	Bode digram using MATLAB . . . . .	2
2	Controller Bode digram using MATLAB . . . . .	3
3	Bode digram for system with lead compensation using MATLAB . . . . .	4
4	all bode digram using MATLAB . . . . .	5