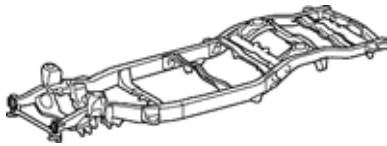


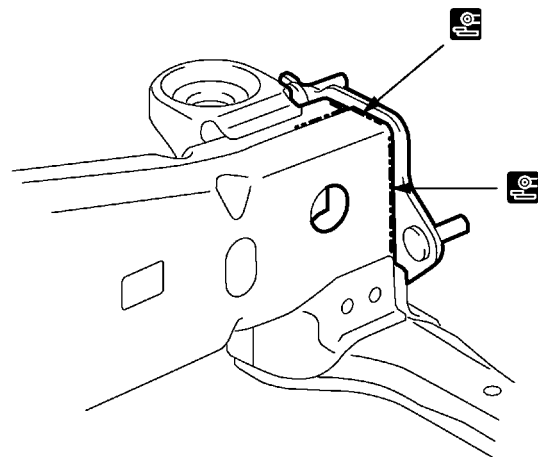
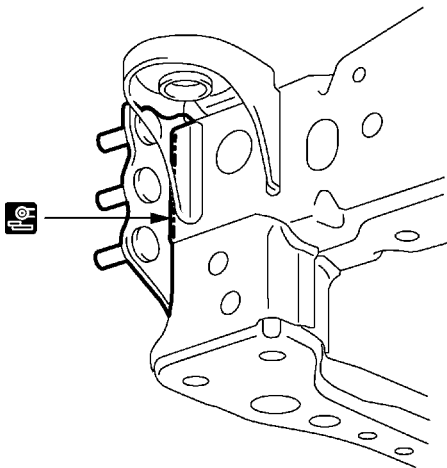
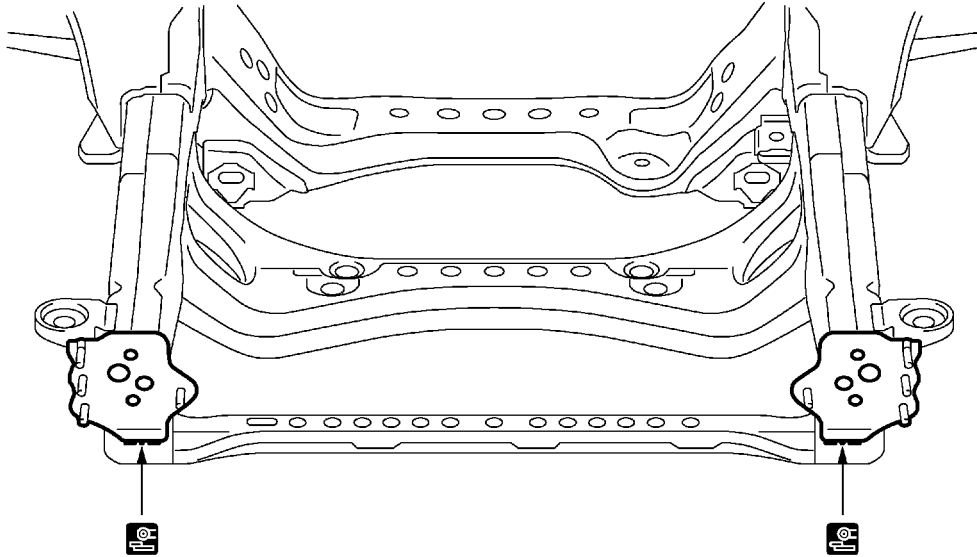
FRAME SIDE RAIL PLATE (ASSY): w/o Winch

F29257A

Symbol meaning

: Cut with Disc Sander etc.

F29257B

REMOVAL

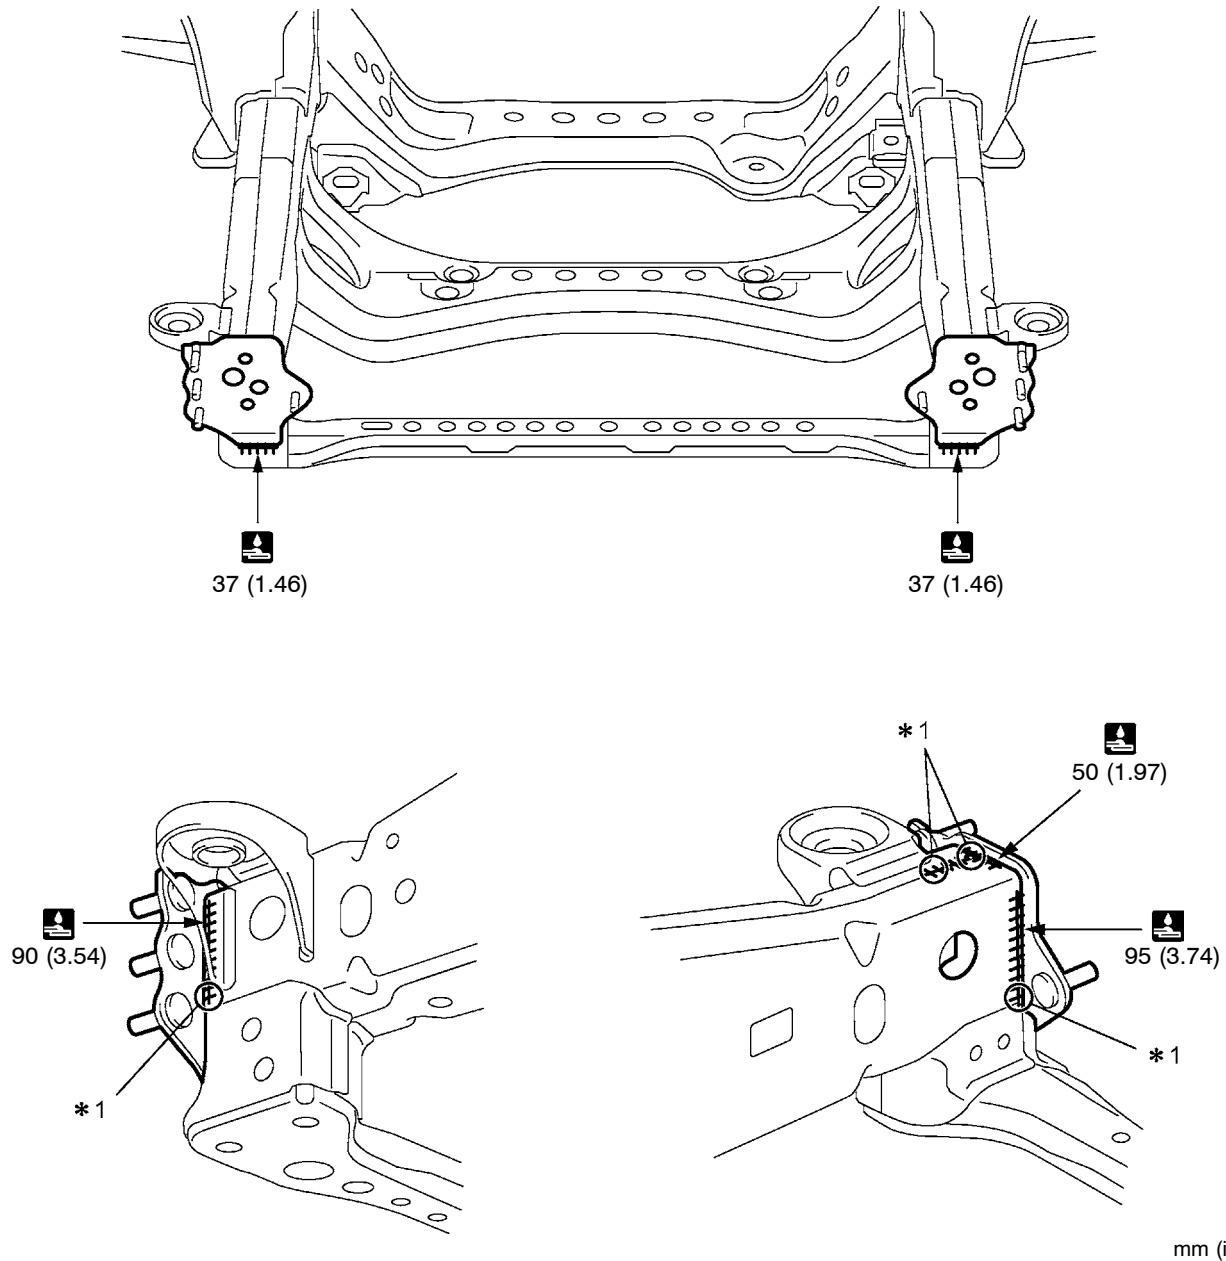
F29257

Symbol meaning

 : Fillet Weld

F29258B

INSTALLATION



F29258

INSTALLATION POINT

- 1 Make sure that proper welding can be performed by setting up the welding conditions as necessary before performing work.
- 2 Make sure that the welding bead at *1 is overlapped.
- 3 To prevent heat deformation, weld the right and left side of each part before continuing to the next part.
- 4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.