


CHASSIS

CLUTCH


■ DESCRIPTION

The new Land Cruiser (Station Wagon) has a clutch system with the following features.

- A dry type single plate clutch which is operated by hydraulic pressure is used.
- A clutch disc assembly that uses an organic solvent-free material is used to help protect the environment.
- A clutch accumulator assembly is used to reduce the noise and vibration that is transmitted to the clutch pedal.
- The clutch start system is used to help ensure safety.
- A turnover mechanism is used to reduce clutch pedal effort.

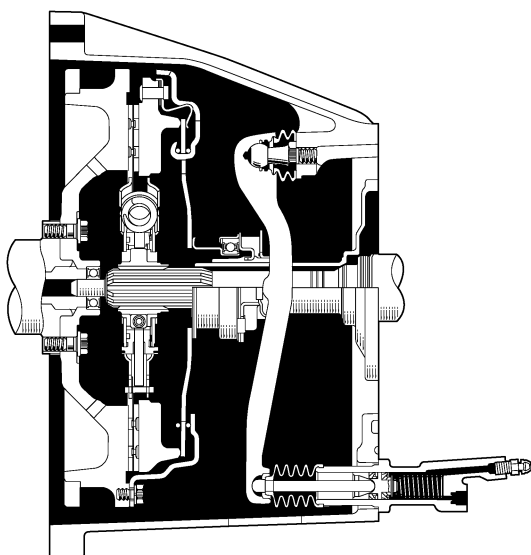

081CH01Y

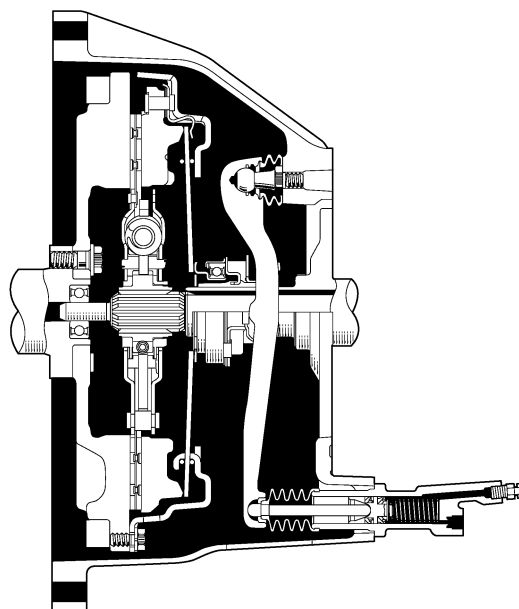1GR-FE Engine Models

081CH02Y

1VD-FTV Engine Models

► Specifications ◀

Engine Type		1GR-FE	1VD-FTV
Clutch	Type	Dry Type Single Plate Clutch Diaphragm Spring	←
	Operation	Hydraulic	←
Clutch Cover	Type	DST*1	←
	Size mm (in.)	275 (10.83)	300 (11.81)
	Installed Load N	8350	8340
Clutch Disc	Facing Size*2 mm (in.)	275 × 175 × 3.5 (10.83 × 6.89 × 0.14)	300 × 190 × 3.5 (11.81 × 7.48 × 0.14)
	Facing Area cm ² (in. ²)	353 (54.72)	423 (65.57)
Master Cylinder	Type	Conventional	←
	Cylinder Diameter mm (in.)	19.05 (0.75)	←
Release Cylinder	Type	Non-adjustable	←
	Cylinder Diameter mm (in.)	20.64 (0.813)	←
Clutch Accumulator Assembly		With	←
Clutch Start System		Standard	←
Clutch Pedal		Turnover	←

*1: DST (Diaphragm Spring Turnover)

*2: Outer Diameter × Inner Diameter × Thickness