


BERGA Bench

LBG25

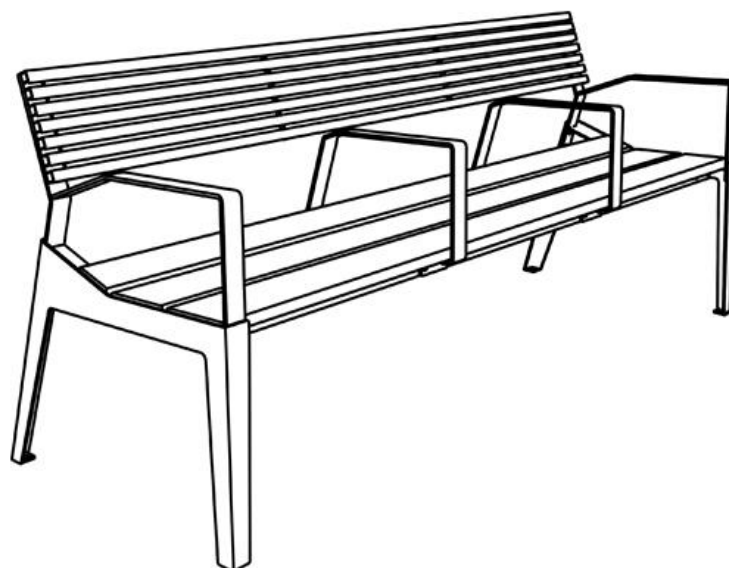

The picture is only illustrative, it may not exactly match the product described.

Product description

Bench is made of steel weldment treated with powder coating. The seat is made from solid wooden lamellas attached to the supporting structure with stainless screws. The bench is made of two side rails welded from 4 mm and 6 mm thick sheet steel plates connected by longitudinal connecting structure and backrest welded from 4 mm thick sheet metal and 20 x 20 mm U profiles made of bent sheet metal 2 mm thick.

Material

Construction: steel grade 11
Solid wood: tropical wood

[STÁHNOUT PDF VZORNIK >](#)

Surface treatment

Galvanized steel treated with powder coating in colour variations: RAL 7016 (anthracite grey), RAL 9005 (jet black), RAL 9006 (white aluminium), RAL 9007 (grey aluminium), RAL 9003 (white), RAL 3003 (red), RAL 6021 (green), shade of Corten (rusty).
Other RAL shades according to RAL sampler on request only.
Tropical wood – treated with teak oil

Dimensions

1800×684×800 mm / 42 kg

Anchoring

Anchoring is done with four stainless steel threaded rods M10 of length min. 200 mm and four nut cover caps M10 with a chemical anchor into concrete foundations prepared in advance.
A detailed drawing is available for download on the website for each particular product.

