STONE **Professional Credible and Successful**


How to create the Touch-Control User Interface

Purpose: Create the Touch-control file and the icon file.

After using this software, you will find how easy to build the User Interface with touch-control function.


Process:

Step1. Run the software “Touch Control”.

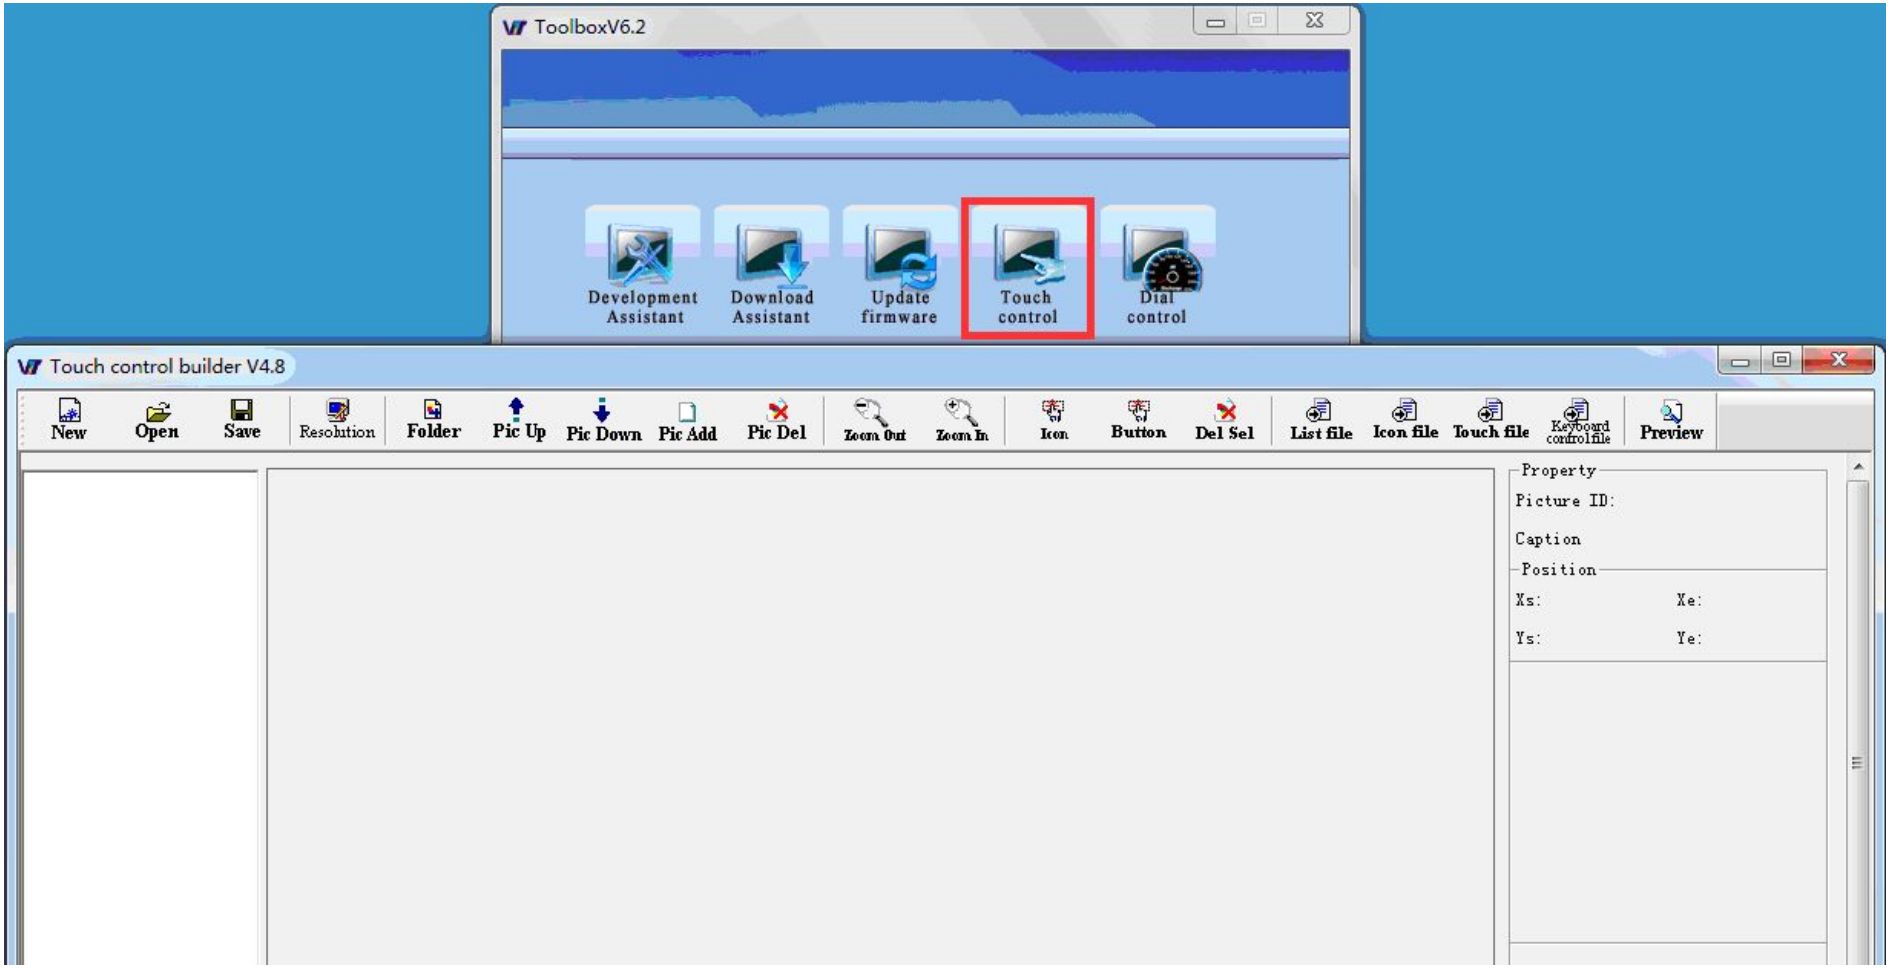

Step2. Add User Interface images

1. Set the resolution.
2. Click “Folder” button.
   Note: (1). All images should be “.bmp” format file.
   (2). The resolution of images should be the same with TFT screen’s.
   (3). All images should be stored in one folder.
   (4). The User Interface images will be added automatically, please name the picture code firstly. (eg. 00, 01, 02, etc.)
3. Select the folder that store images, and then click “OK” button.

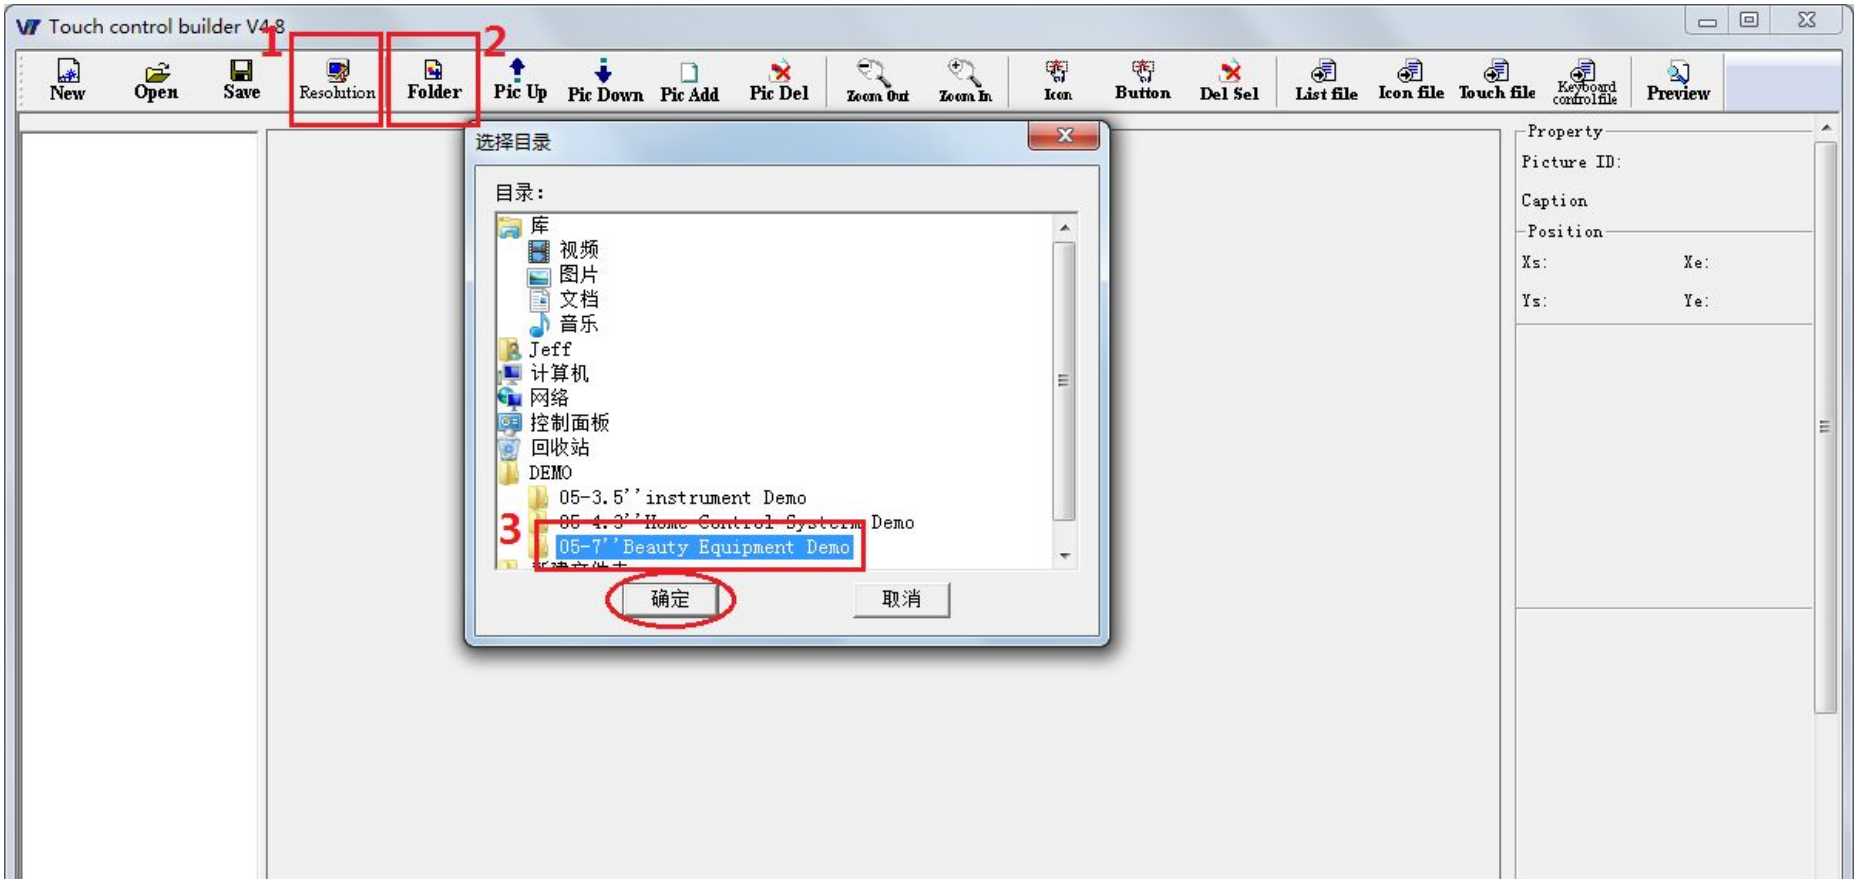

Step3. Define Icon

Purpose: When you build the touch button on the screen, it is better to add a dynamic effect.
Note: Please make all icons first.



Step4. Define Button

1. Click “Button”.
2. Define the button area.
3. Choose other User interface you want to switch, or not.
4. Choose the icon as a dynamic effect.
5. Define a button value. See below picture-05.


Note: (1) The button value is very important, because when you touch the “button” on the screen, the terminal will output this value to your MCU by “0x78” command automatically. (For example: “AA 78 Value CC 33 C3 3C”)


(2) Then your MCU can perform the related sub-program according to this value.

Note: Many buttons can share one value, and it can copy the button to other user interface if necessary.


6. Click related Icon and Adjust the coordinate of the Icon. See below picture-06.

Note: The icon size should be same with the button, otherwise the dynamic effect would have deviation.

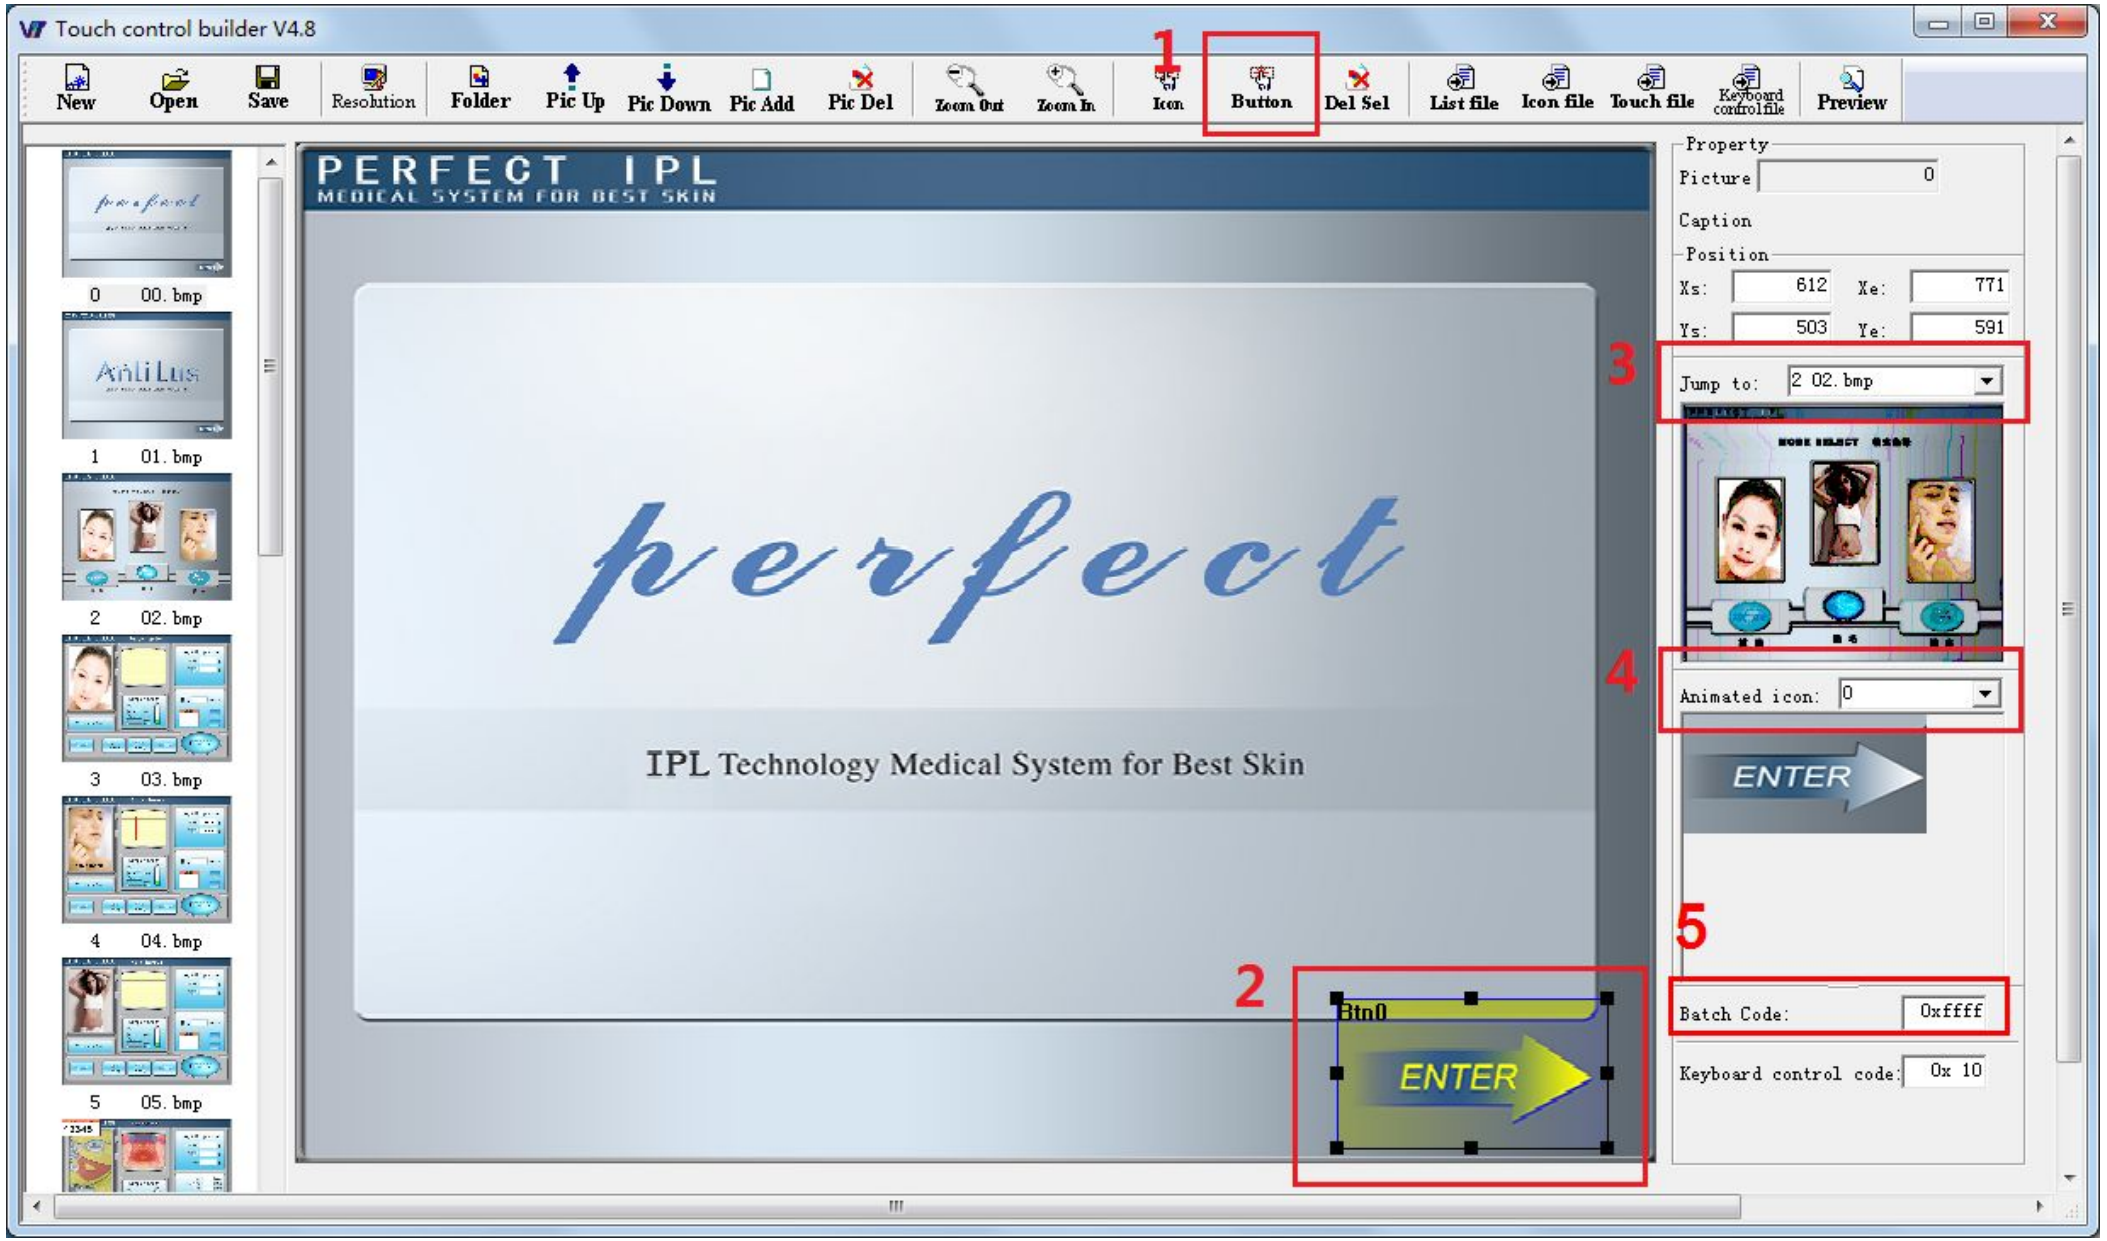
Touch control builder V4.8
New
Open
Save
Resolution
Folder
Pic Up
Pic Down
Pic Add
Pic Del
Zoom Out
Zoom In
Icon
Button
Del Sel
List file
Icon file
Touch file
Keyboard controlfile
Preview
1
0 00.bmp
1 01.bmp
2 02.bmp
3 03.bmp
4 04.bmp
5 05.bmp
PERFECT IPL
MEDICAL SYSTEM FOR BEST SKIN
perfect
IPL Technology Medical System for Best Skin
2
Btn0
ENTER
Property
Picture 0
Caption
Position
Xs: 612 Xe: 771
Ys: 503 Ye: 591
3
Jump to: 2 02.bmp
4
Animated icon: 0
ENTER
5
Batch Code: 0xffff
Keyboard control code: 0x 10

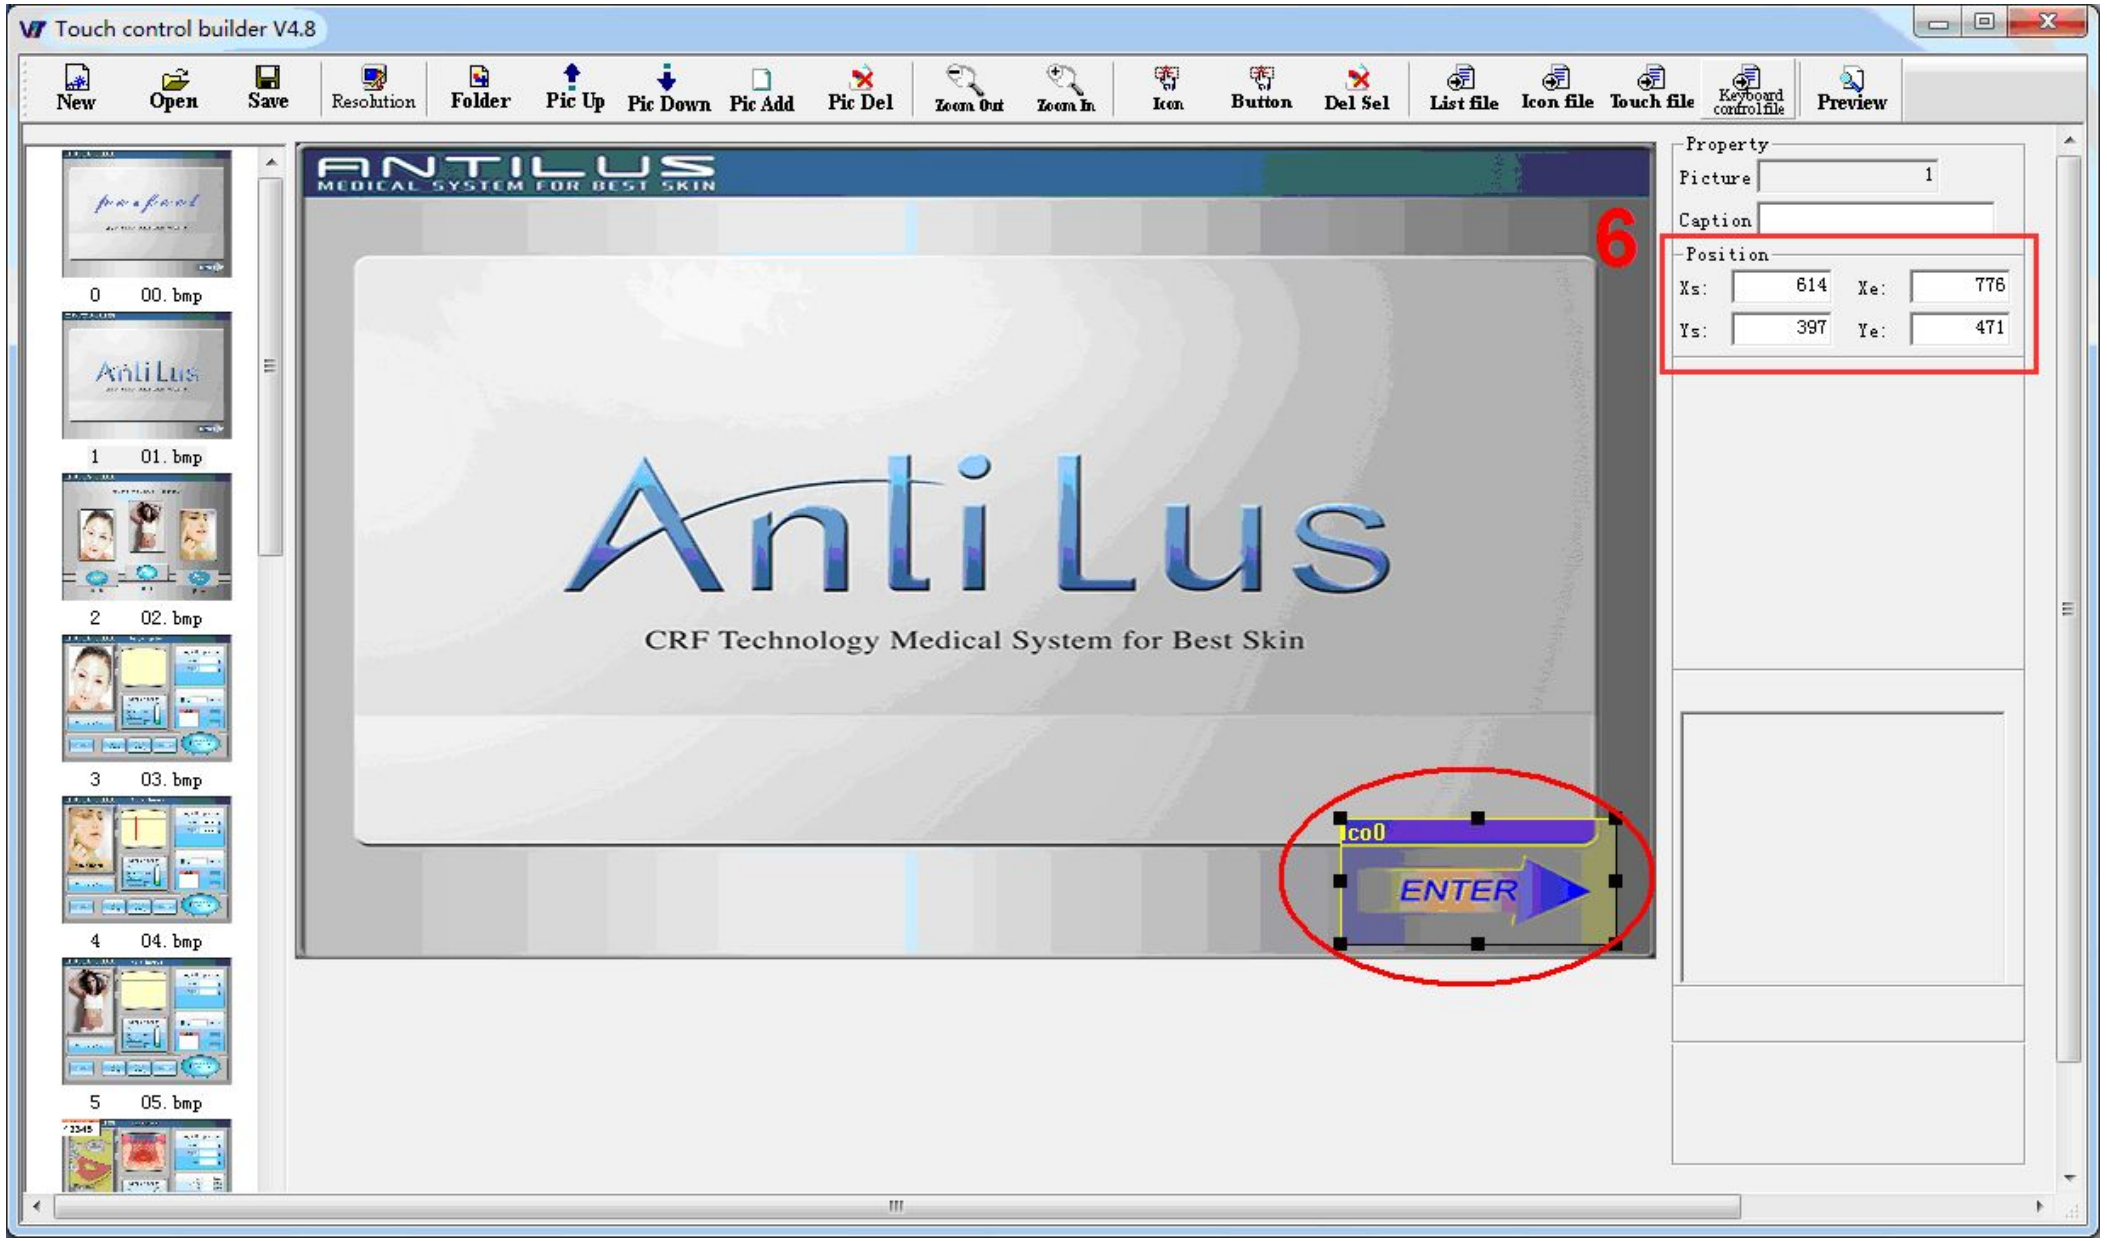

Touch control builder V4.8
New
Open
Save
Resolution
Folder
Pic Up
Pic Down
Pic Add
Pic Del
Zoom Out
Zoom In
Icon
Button
Del Sel
List file
Icon file
Touch file
Keyboard controlfile
Preview
0 00. bmp
1 01. bmp
2 02. bmp
3 03. bmp
4 04. bmp
5 05. bmp
ANTILUS
MEDICAL SYSTEM FOR BEST SKIN
6
Anti Lus
CRF Technology Medical System for Best Skin
co0
ENTER
Property
Picture 1
Caption
Position
Xs: 614
Xe: 776
Ys: 397
Ye: 471

Step5. Build a return button or not

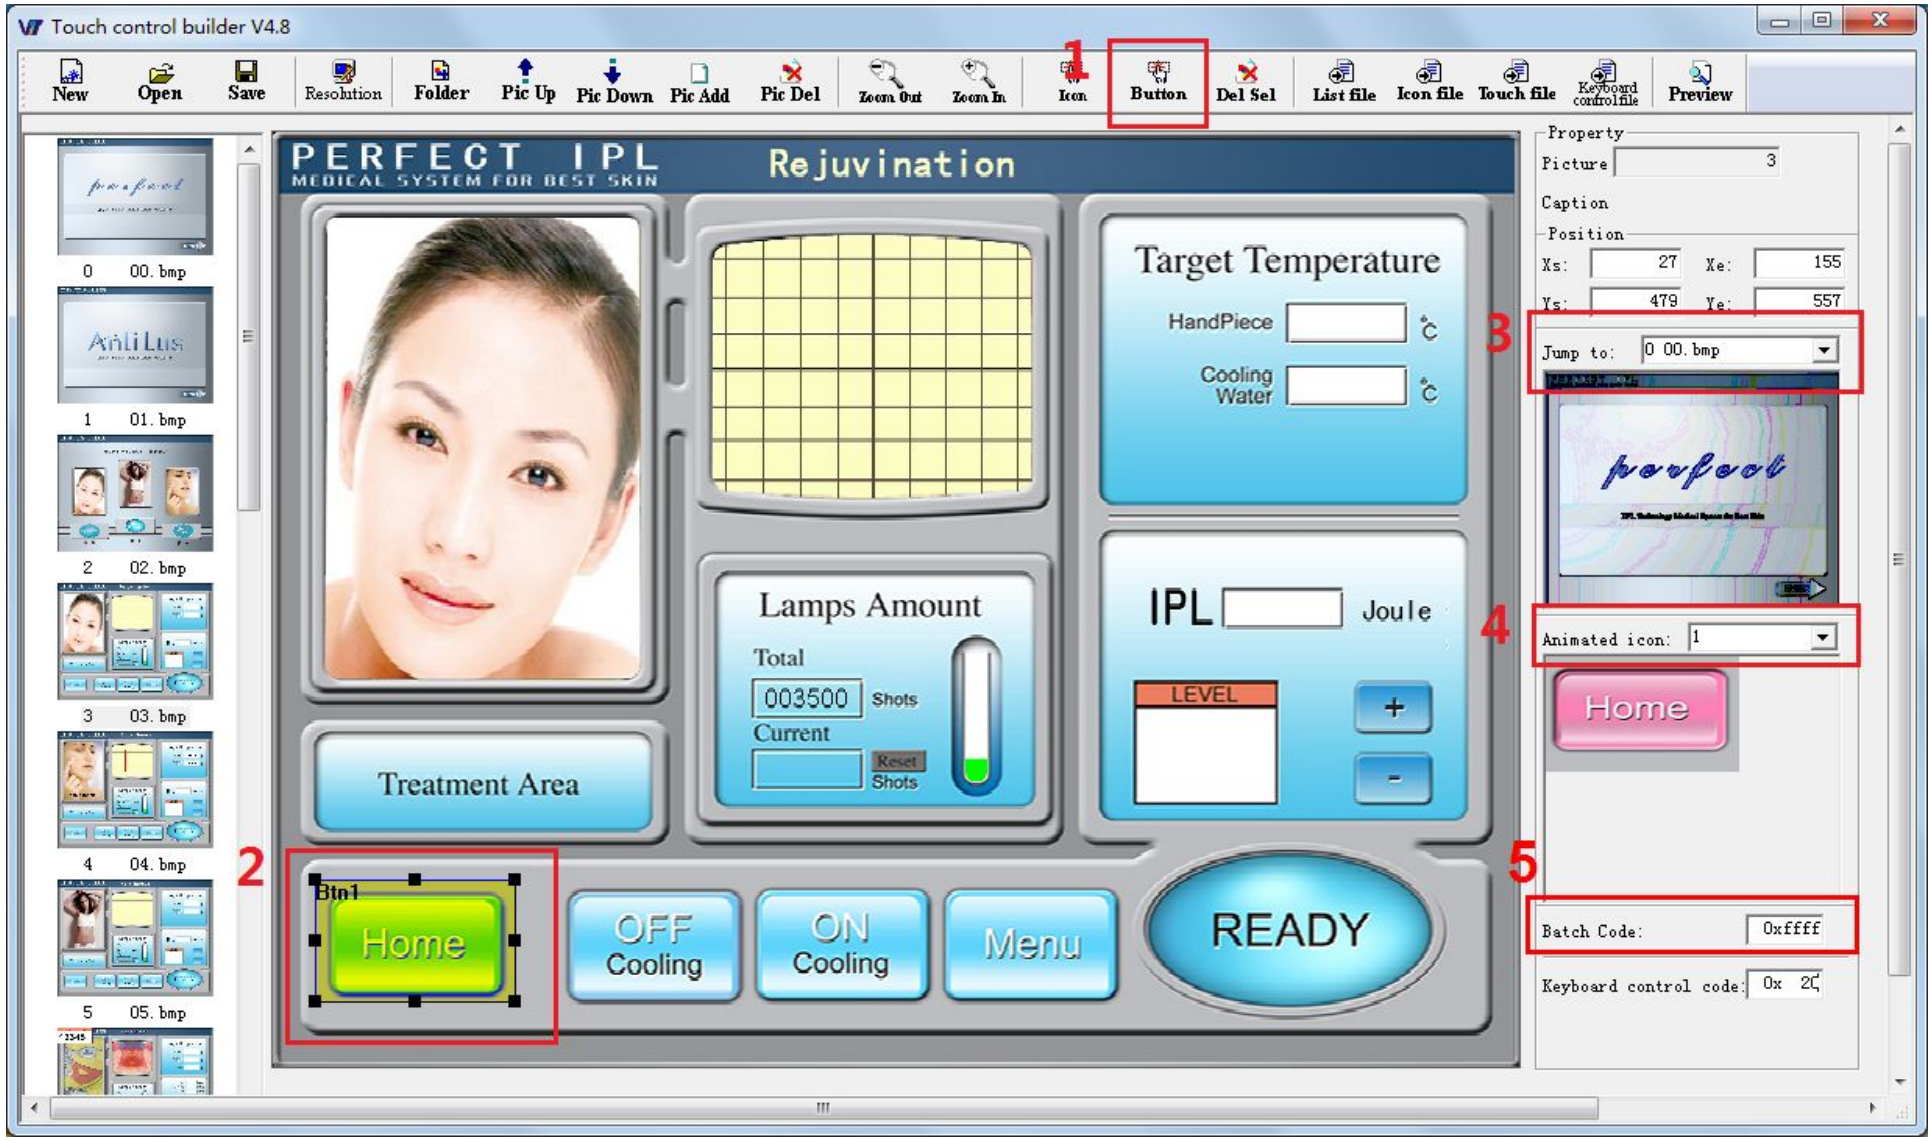


Step6. Select “Preview” option

Click the button field to see whether the button works well.

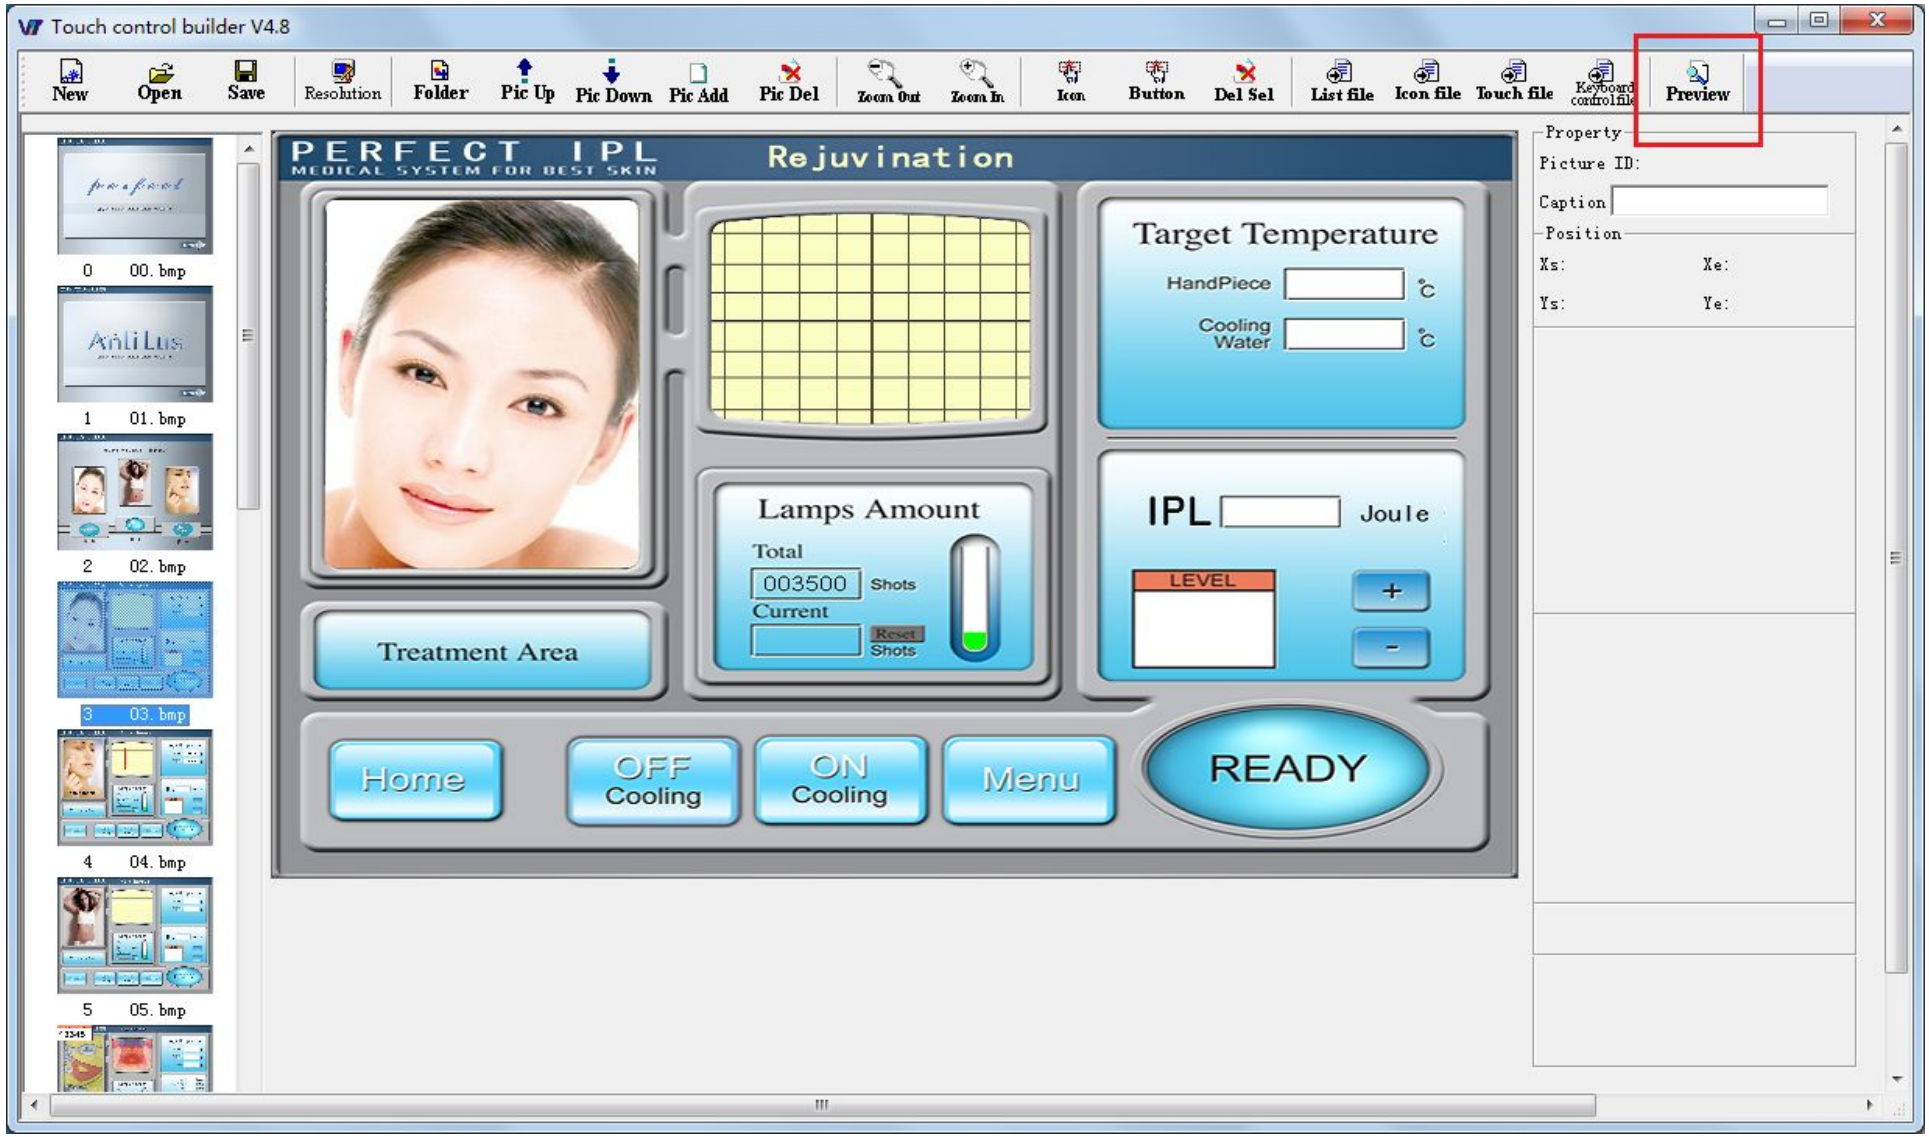

Step8. Create the application file : Icon file & Touch file.


And you could use “Save” button to create the “tsi” format project file, so that this project can open next time.
Note: All the application files are “txt” format.

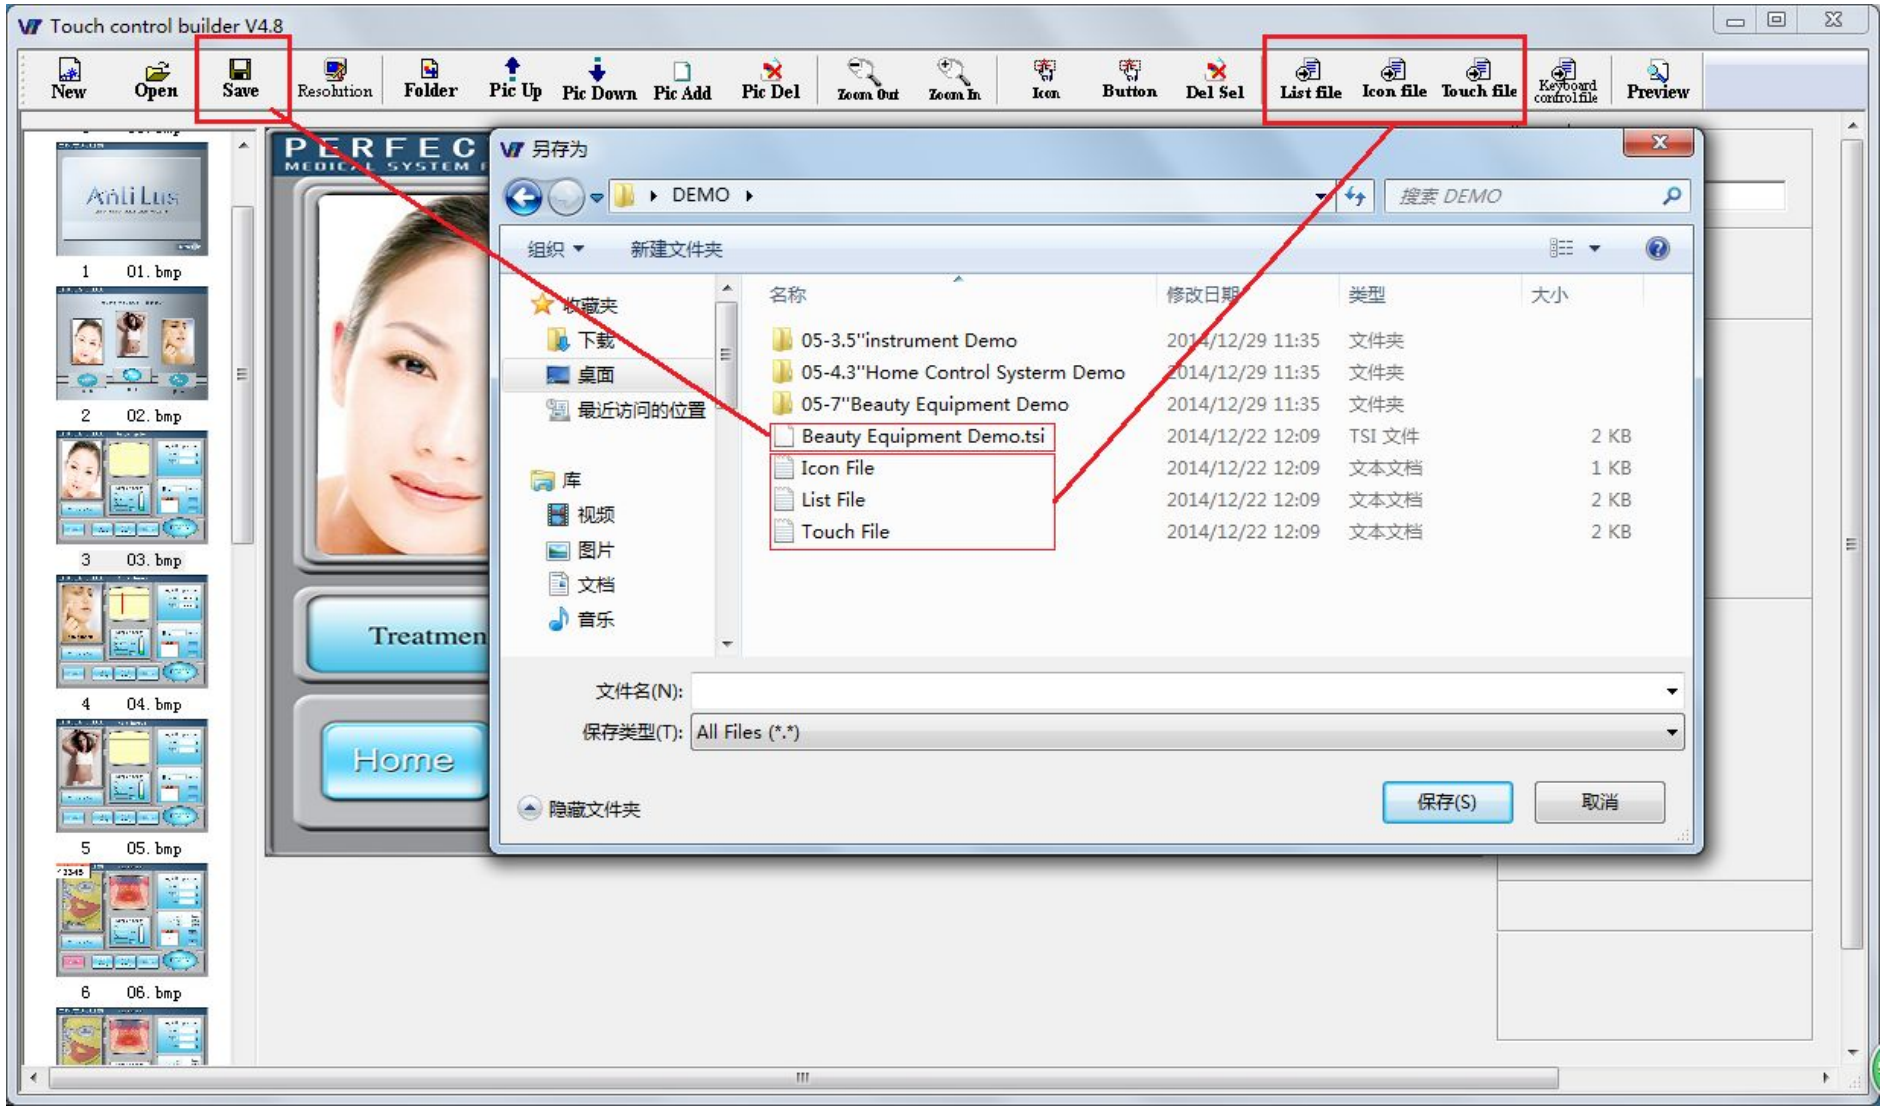

Step9. Download the same images into the terminal through USBmini port.


Note: 1. Please be sure that the sequence of the images is the same as just now.

2. The sequence number of images also starts from “0”.

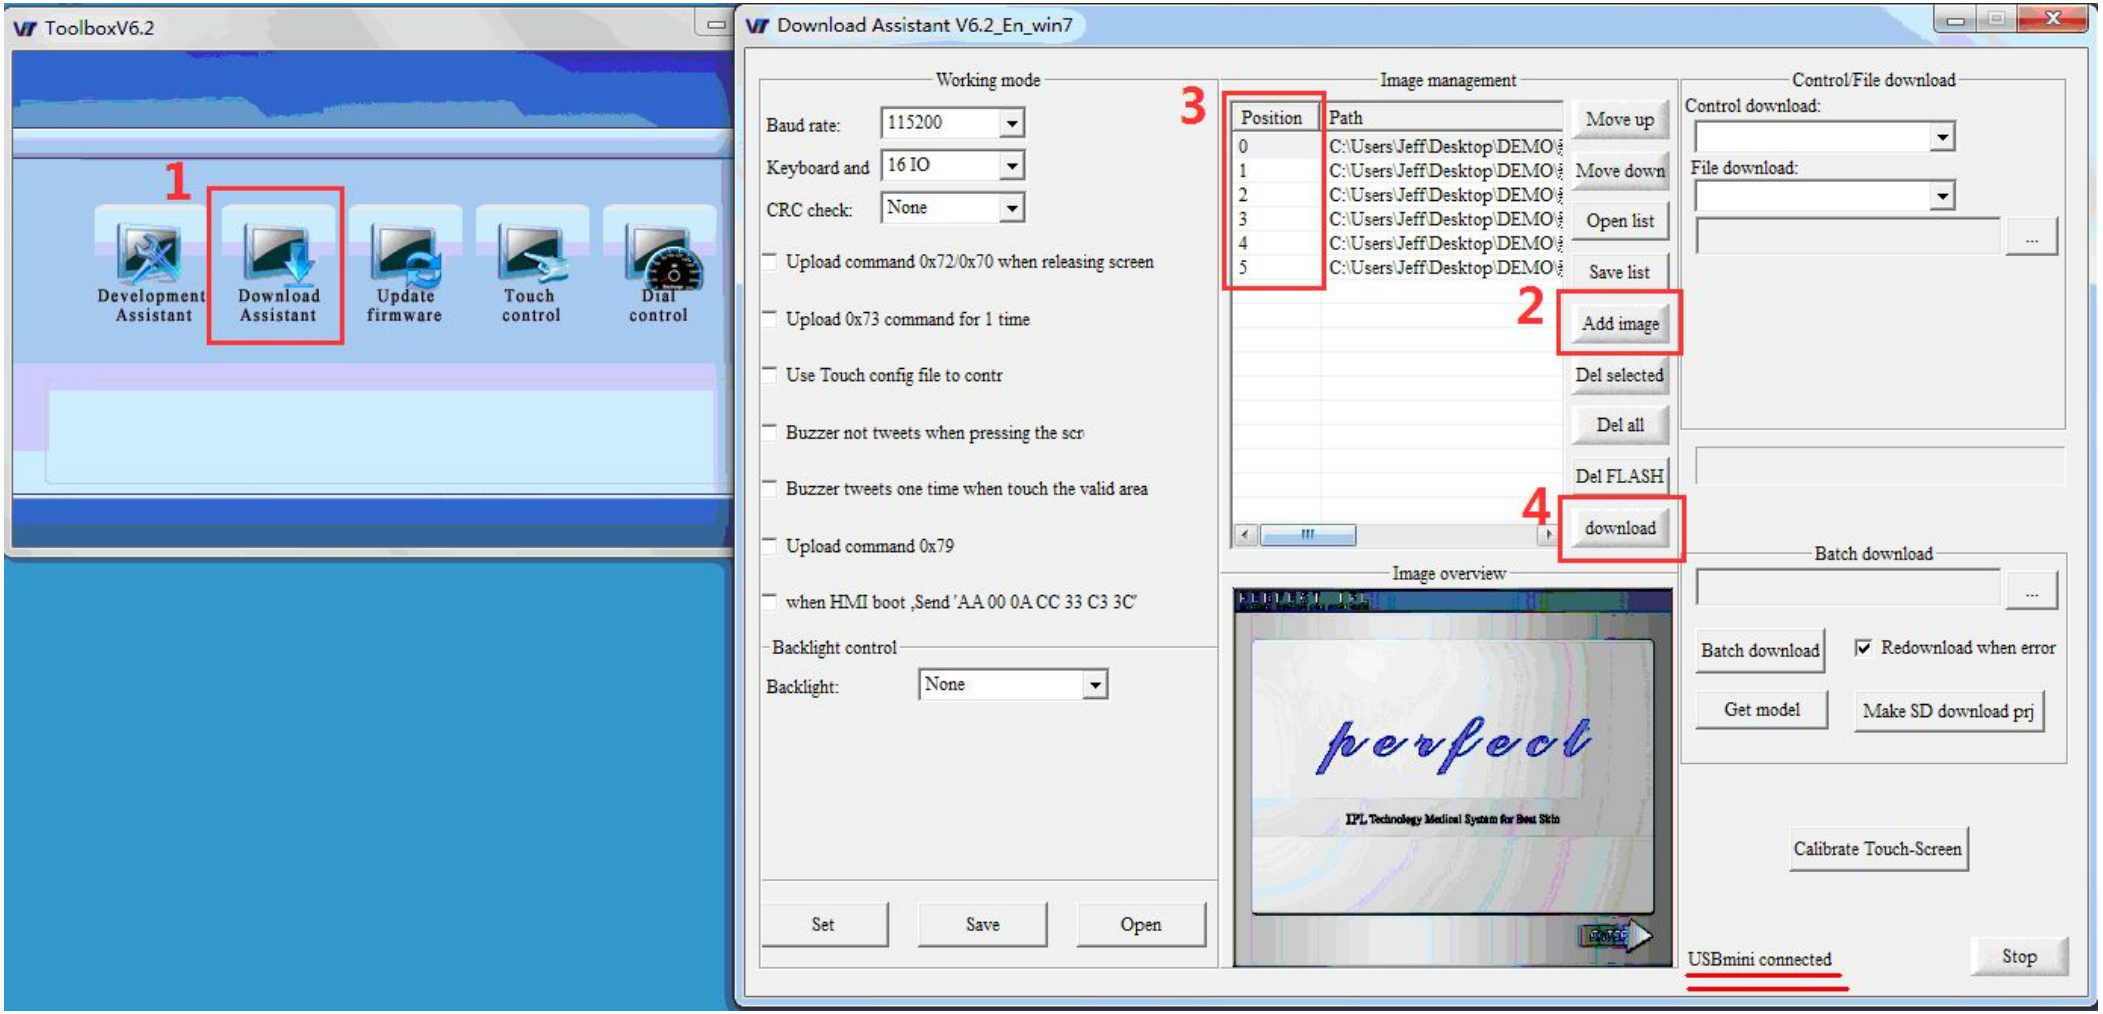

Step10. Download the touch file and the icon file into terminal through the mini USB port.


1. Select the “Download Icon File” and “Download Touch-control File” option.
2. Choose the Icon file and the touch file. (.txt format file)
3. Click “Download” Button.

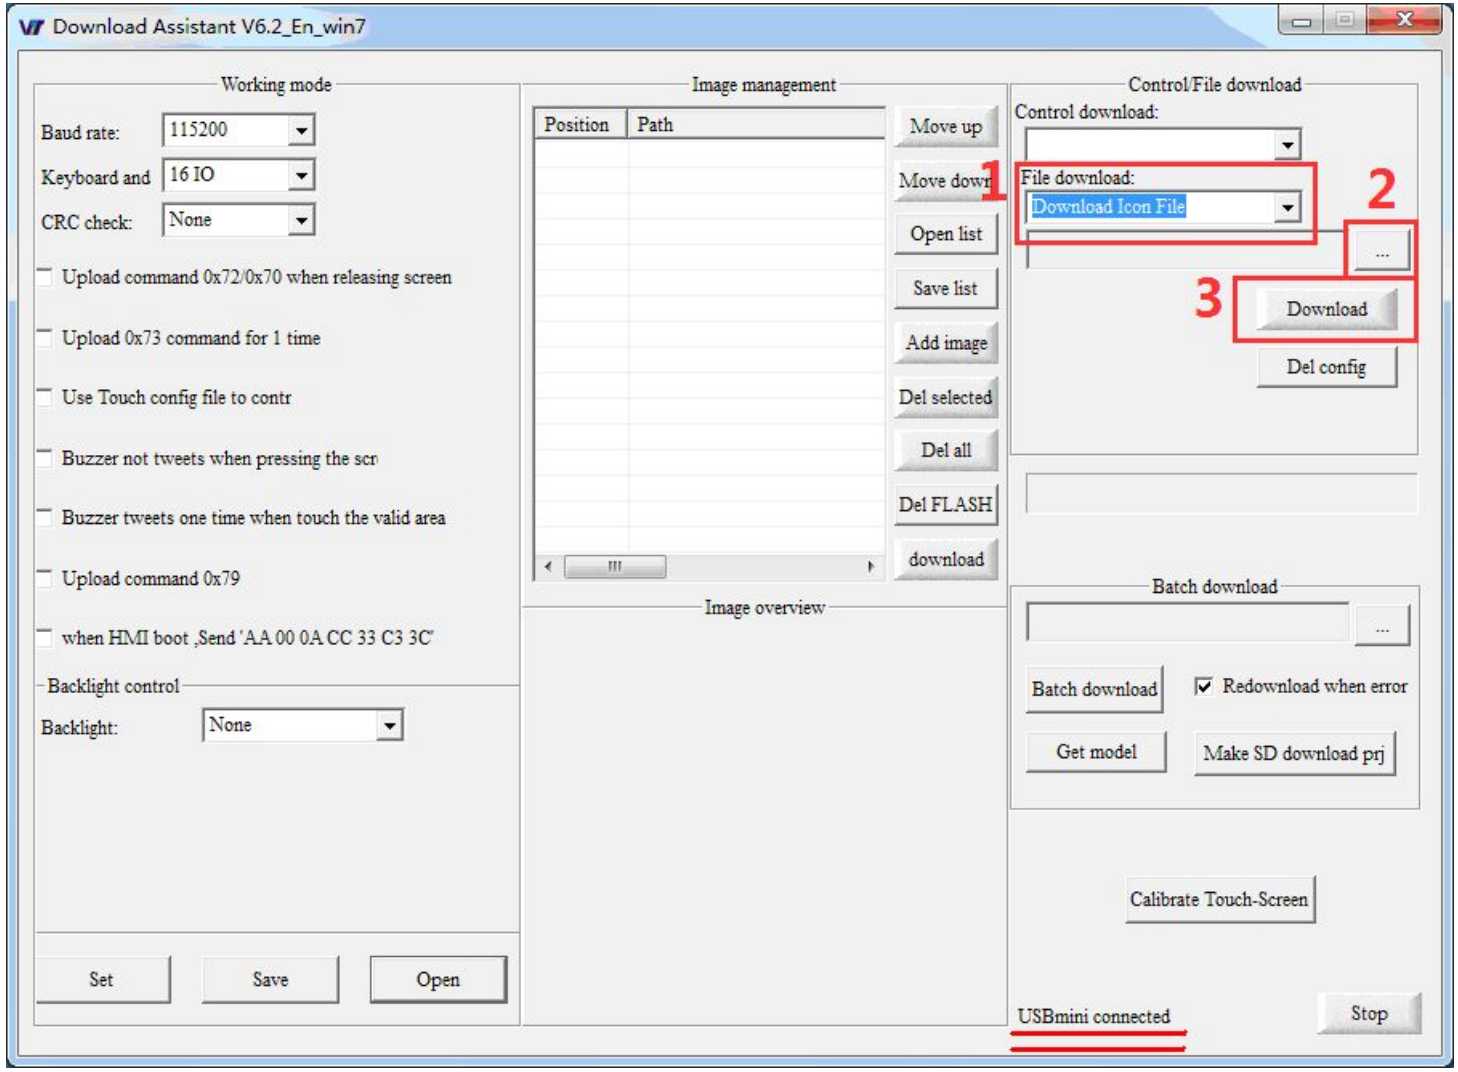

Step11. Set Working Mode through the USBmini port

1. Select the three options below.

2. Click “Set” button.

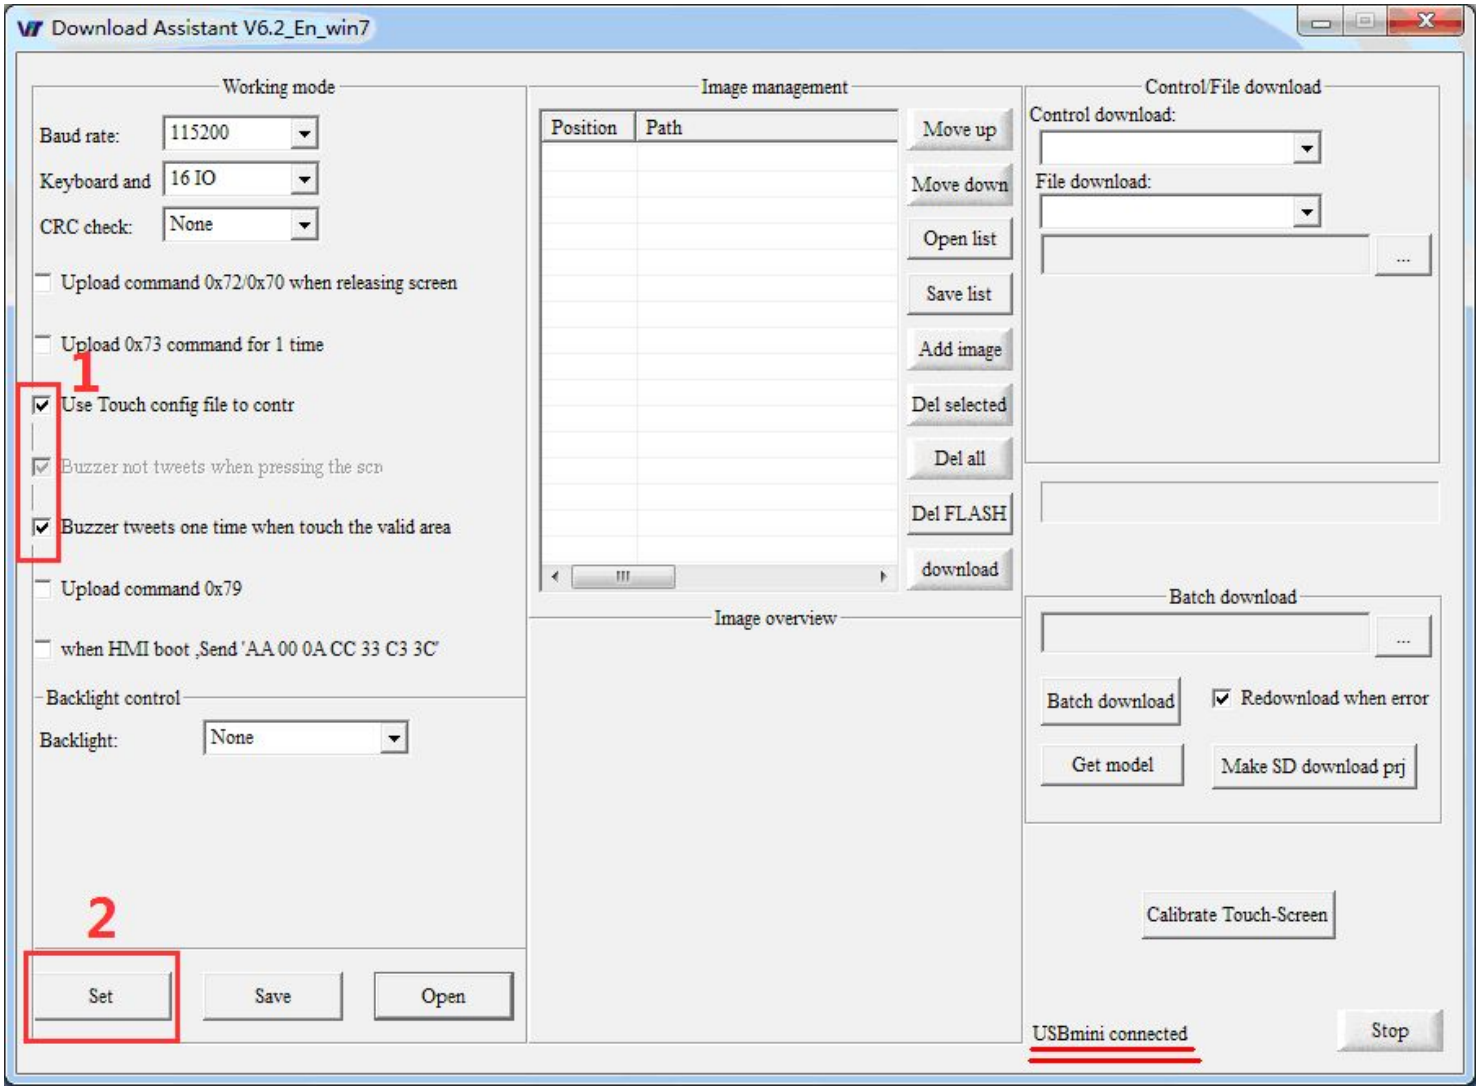

Step12. Finally, the User Interface can be controlled by touch.

Congratulations!

There is a simple example in this folder-03，it may use the four images for exercise.

Should you have any technical questions, please feel free to contact us.