

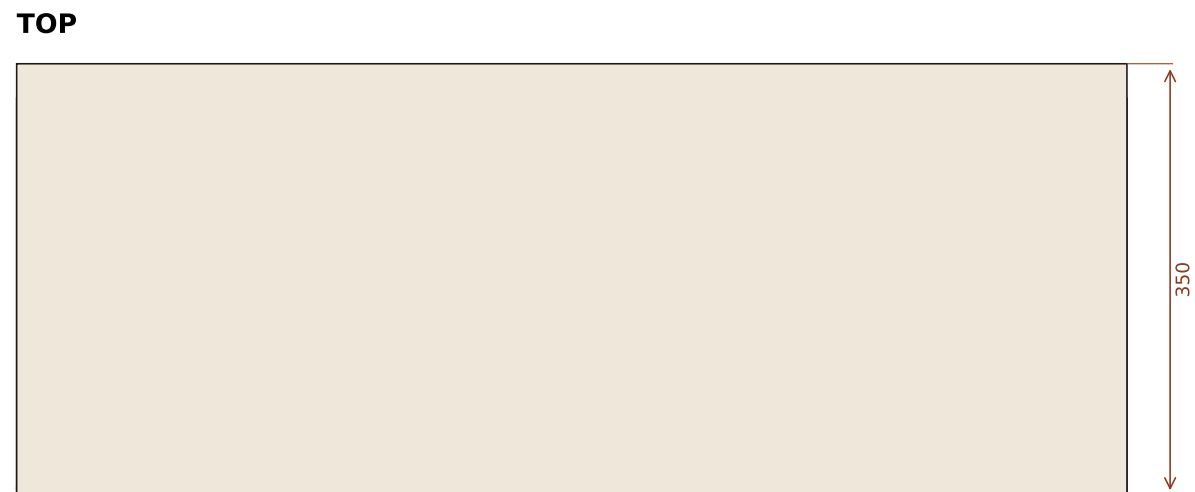
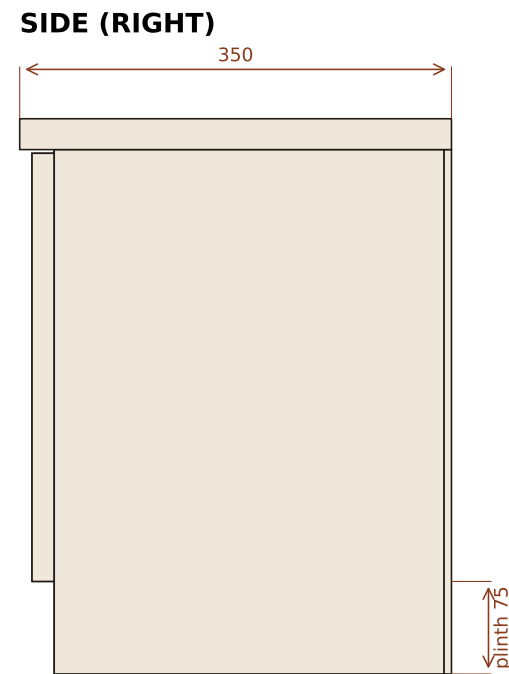


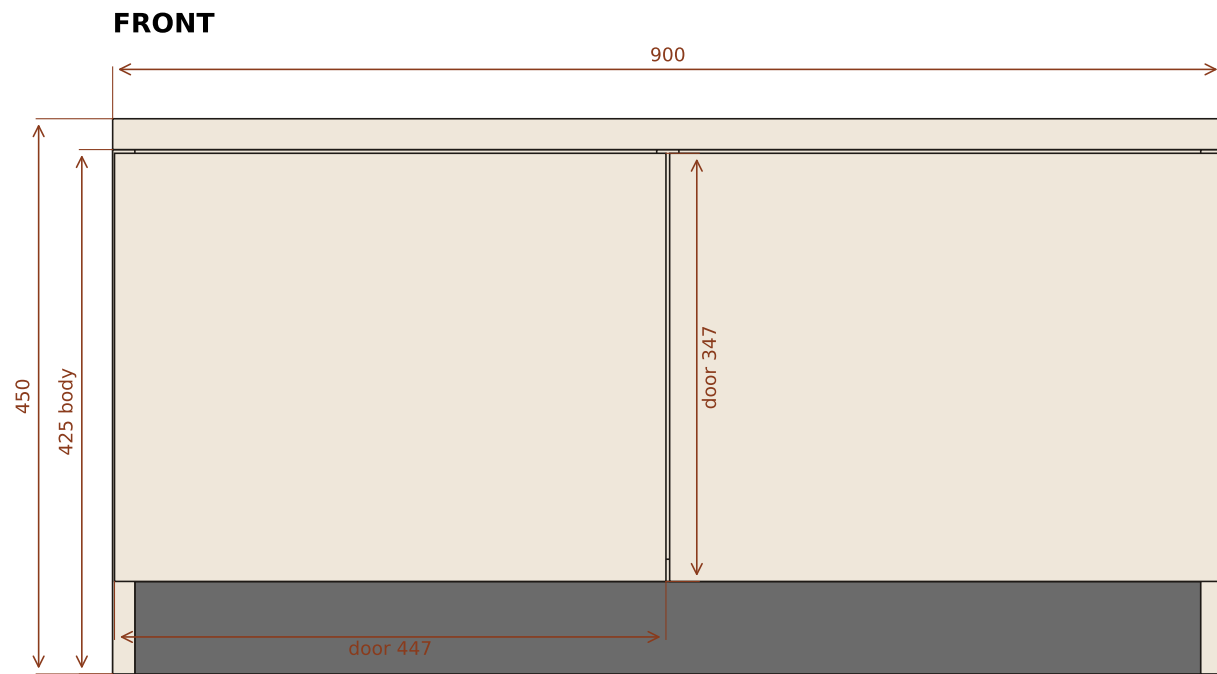

FRONT - DOORS REMOVED (INTERNAL)

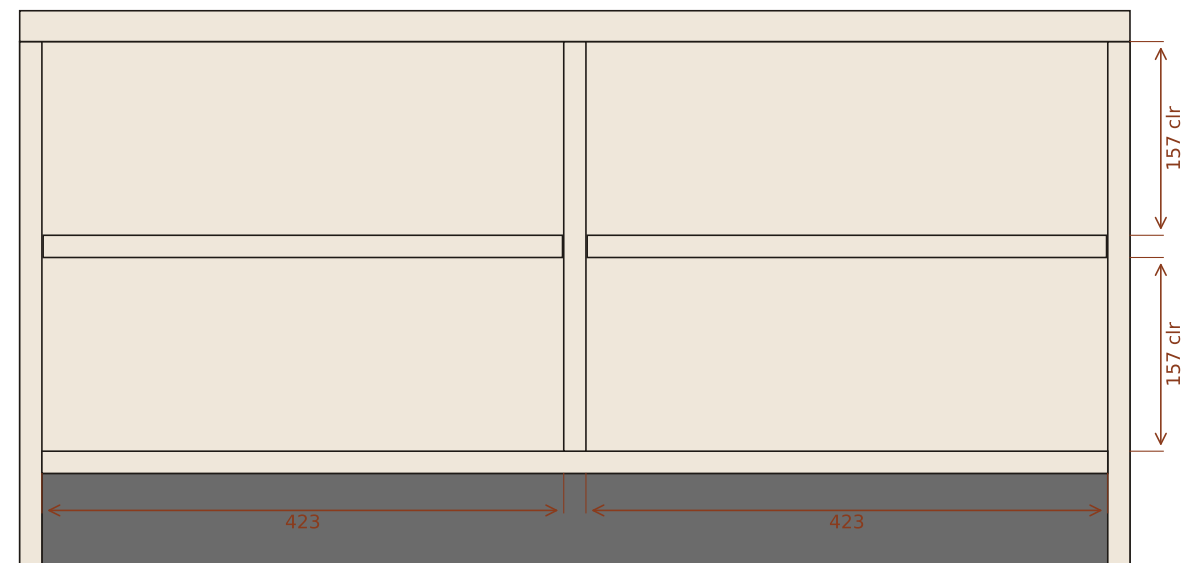

Board 18 mm throughout; shelves 18 mm loose on pins; internal depth 316; shelf depth 301


ALTERCRAFT | S01 SHOE BENCH | GENERAL DIMENSIONS

Variant B | W 900 x D 350 x H 450 mm | board 18 mm BWP_PLY | back 6 mm | finish WALNUT | units mm | scale: fit to sheet (do not scale)

DIGITAL MASTER v1 - NOT RELEASED FOR PRODUCTION. Structure, fasteners, tolerances and hardware boring require fabrication validation.

S01-B-W900
sheet 1/2

SECTION A-A at X = 229.5 mm (looking from right)

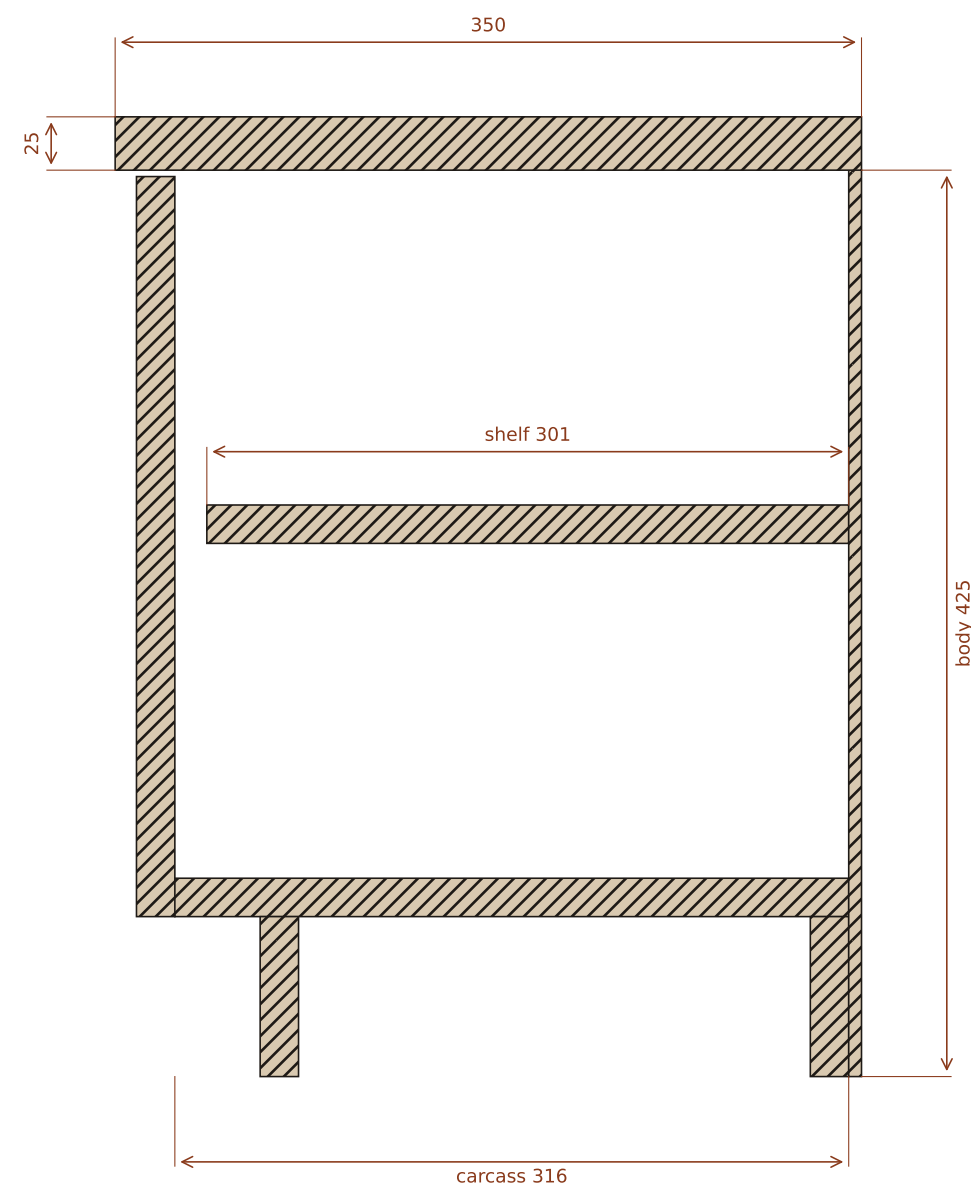

Seat top 25 mm, overhang 10 mm past door face
Door 18 mm full overlay, 3 mm gap under seat
Back 6 mm fixed over carcass rear edges, floor to seat underside
Kick rail recessed 40 mm behind carcass front
Rear plinth rail bears on floor; anti-tip bracket zone
Load path: seat -> sides + partition(s) -> bottom -> plinth rails -> floor
Max seat span 423 mm (assumed limit 450)

ALTERCRAFT | S01 SHOE BENCH | SECTION A-A (THROUGH BAY 1 CENTRE)

Variant B | W 900 x D 350 x H 450 mm | board 18 mm BWP_PLY | back 6 mm | finish WALNUT | units mm | scale: fit to sheet (do not scale)

DIGITAL MASTER v1 - NOT RELEASED FOR PRODUCTION. Structure, fasteners, tolerances and hardware boring require fabrication validation.