

**Course Title:** Microprocessors and Assembly Language Lab (CSE-4504)

Department of Computer Science and Engineering (CSE)  
**Islamic University of Technology (IUT), Gazipur**

**Lab # 04**

*Understanding Advanced 8086 I/O Instructions using Array in Assembly Language Program.*

**Objective:**

To understand some advanced 8086 instructions and getting familiar with the use of Array in Assembly Language Program.


**Theory:**

- **Array**

Arrays can be seen as chains of variables. A text string is an example of a byte array; each character is presented as an ASCII code value (0..255). Here are some array definition examples:

```
a DB 48h, 65h, 6Ch, 6Ch, 6Fh, 00h
b DB 'Hello', 0
```

b is an exact copy of the an array, when compiler sees a string inside quotes it automatically converts it to set of bytes. This chart shows a part of the memory where these arrays are declared:

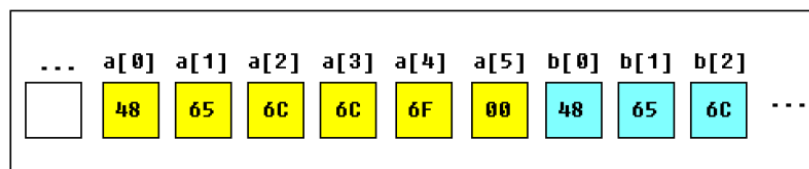

You can access the value of any element in array using square brackets, for example:

```
MOV AL, a[3]
```

You can also use any of the memory index registers **BX, SI, DI, BP**, for example:

```
MOV SI, 3
MOV AL, a[SI]
```

If you need to declare a large array you can use **DUP** operator. The syntax for **DUP**: For example:

```
c DB 5 DUP(9)
c DB 9, 9, 9, 9, 9 ; is an alternative way of declaring:
```

one more example:

```
d DB 5 DUP(1, 2)
d DB 1, 2, 1, 2, 1, 2, 1, 2, 1, 2 ; is an alternative way of declaring:
```

Of course, you can use **DW** instead of **DB** if it's required to keep values larger then 255, or smaller then -128. **DW** cannot be used to declare strings!

### **Assembly Language Program Example for Array:**

*To derive summation of a series  $1 + 2 + 3$  using array. Here, value of  $N$  is given by user where  $N=3$  and output is shown in the output window:*

```
.....  
org 100h  
.DATA ; Data segment starts  
A db 3, 1, 2 ;1-D array for number  
B db 00h  
message db 'Enter the value of N:$' ;1-D array for string  
.CODE ; Code segment starts  
MAIN PROC  
mov ax, @DATA  
mov ds, ax  
xor ax, ax  
mov si, OFFSET A  
mov di, OFFSET B  
mov dx, OFFSET message ; Load Effective Address of the message in DX register  
; lea dx, message ; (similar meaning that Load Effective Address)  
  
mov ah, 09h ;display string function  
int 21h ;display message  
  
mov ah, 01h  
int 21h  
  
mov cl, al  
sub cl, 48 ; to convert the ascii value of 3 to decimal 3  
xor al, al  
Loop_1:  
add al, [Si]  
inc Si  
loop Loop_1  
  
mov bl, al  
add bl, 48 ; to convert the ascii value of the output to decimal  
  
mov ah, 02h  
mov dl, 0Dh  
int 21h  
mov dl, 0Ah  
int 21h  
mov dl, bl  
int 21h  
  
mov ah, 4ch  
int 21h  
MAIN ENDP  
END MAIN  
RET
```

**Tasks to do:**

1. Write an assembly language code to derive the final value of the number sequence  $1^2+2^2+3^2+4^2+.....+N^2$ . (**use ARRAY and Loop**).

**Sample Input / Output:**

Input the maximum value of N: 9  
The result is: 285