
## Mem\_DMA\_DAC

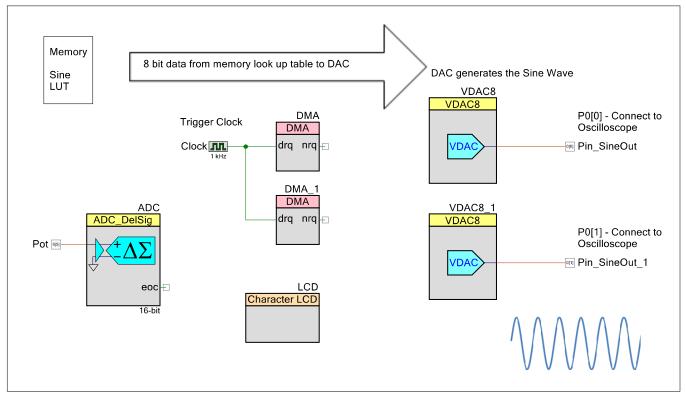

Note: If you have to drive resistive load, it is recommended to buffer VDAC output using an Opamp before routing the signal to a pin