Design to Cost · TOOL CONCEPT DRAWING · MOULD

EX26-0002 · Mould · 1 cavity

PLAN VIEW (bottom half)

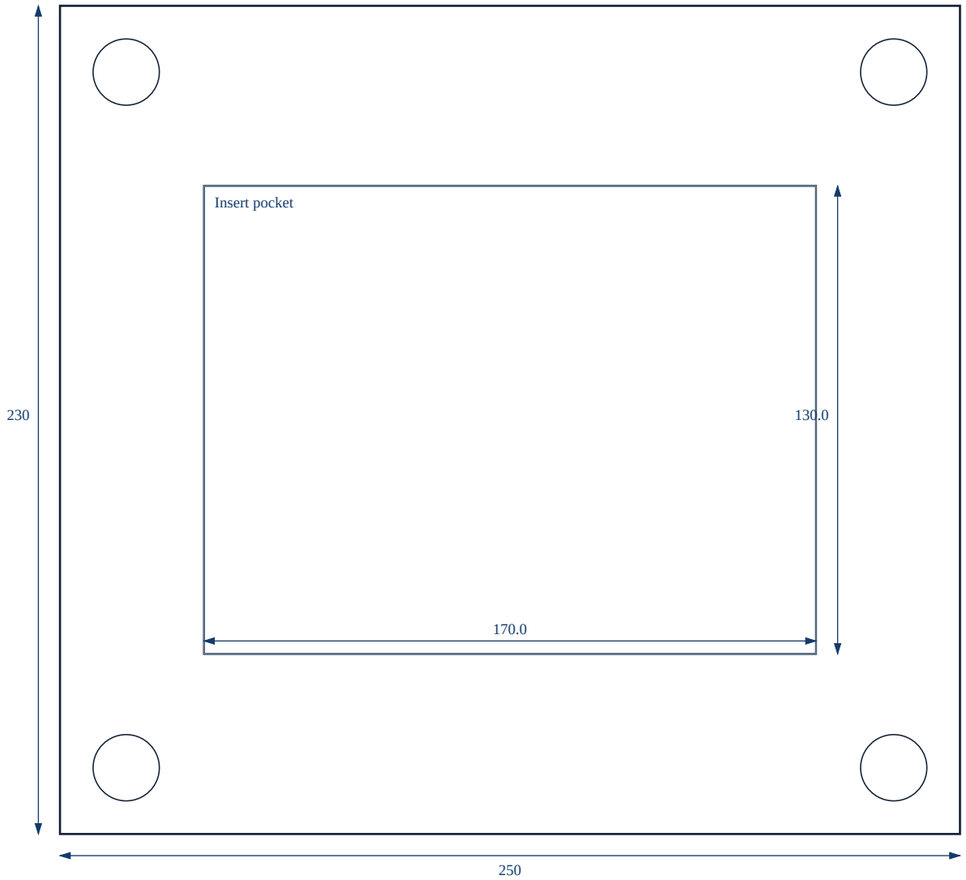

ELEVATION (plate stack, mm)

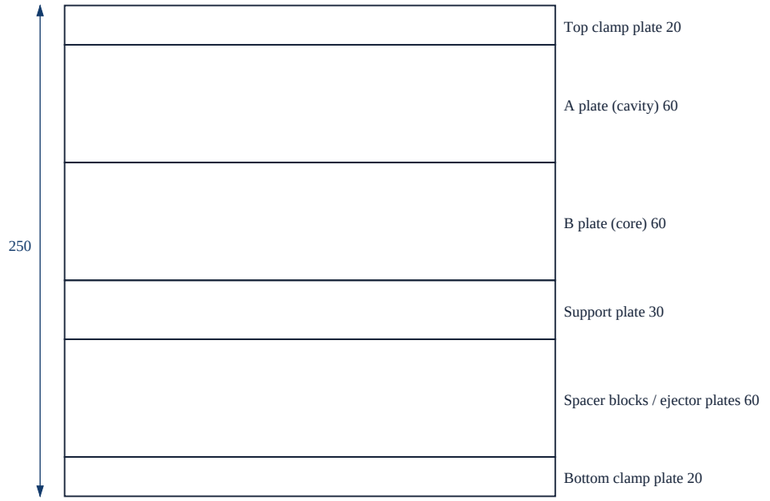

Main bill of material (processes are in the tool cost sheet)

Element	Qty	Grade	Make	Part no.
Mould base Standard 2-plate 2325	1	C45 / S50C	LKM / Futaba	
Cavity insert (steel)	1	2738 (1.2738)	Bohler / Thyssen	
Core insert (steel)	1	2738 (1.2738)	Bohler / Thyssen	
Guide pillar	4		Misumi / HASCO	
Guide bush	4		Misumi / HASCO	
Ejector pin	12		Misumi / DME	
Return pin	4		Misumi / DME	
Sprue bush	1		HASCO / DME	
Locating ring	1		HASCO	
Cooling connectors & plugs	16		Staubli / HASCO	

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. CONCEPT layout for quotation and PO reference; the detailed tool design (3D and drawings of every part) is in Tool design → release pack.

Design to Cost
Drawing no. **EX26-0002-C-Mould**
Rev **-**

Part	EX26-0002 · plastic_cover	**Mould base / die set**	Standard 2-plate 2325 · 250 × 230 mm
Tool / stage	Mould · 1 cavity · Mould	**Plate material**	C45 / S50C · make LKM / Futaba
Operations	plastic	**Tool cost (estimate)**	166,766 INR = 166,766 INR
Press / machine	IMM-80 for 46.0 t	**Date**	2026-10-26 · Design to Cost

General tolerance	ISO 2768-mK
Projection	
Scale	as shown
Sheet	1 / 1
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-