Design to Cost · TOOL CONCEPT DRAWING · STAGE 2 OF 3

EX26-0001 · Die 2: Piercing

PLAN VIEW (bottom half)

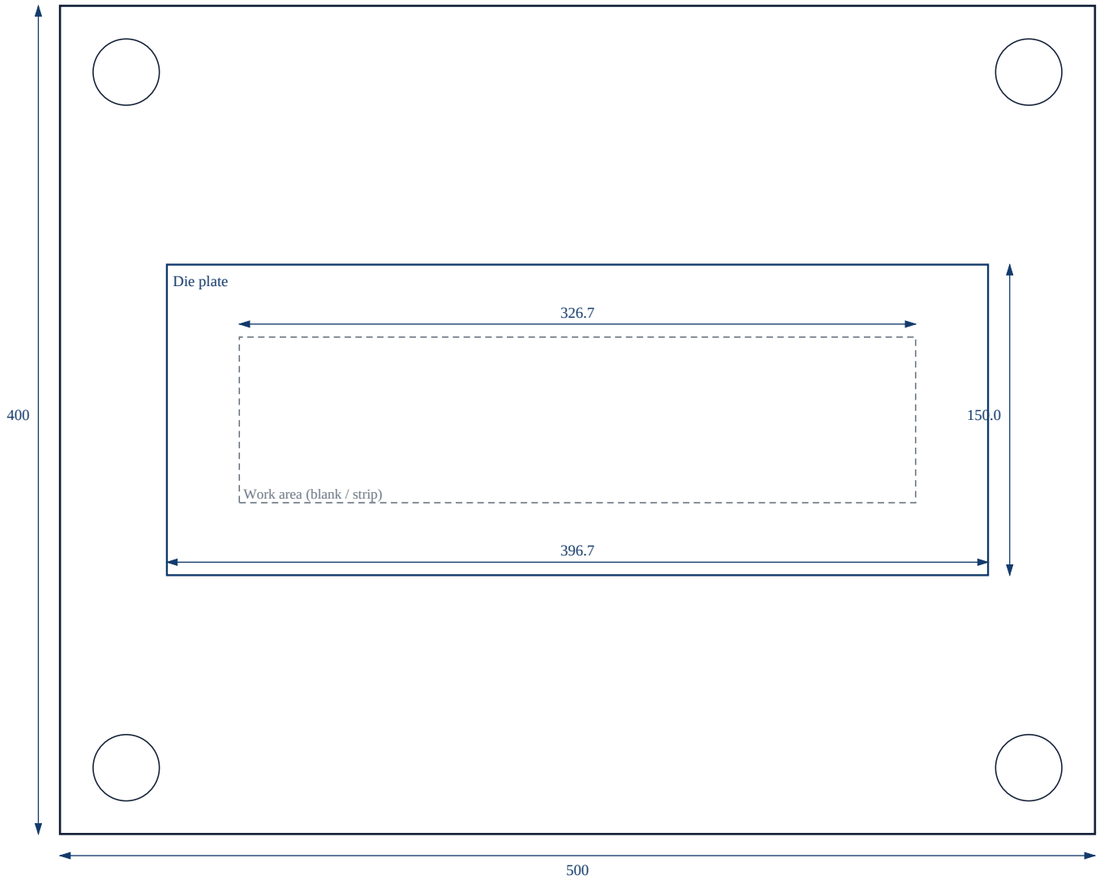

ELEVATION (plate stack, mm)

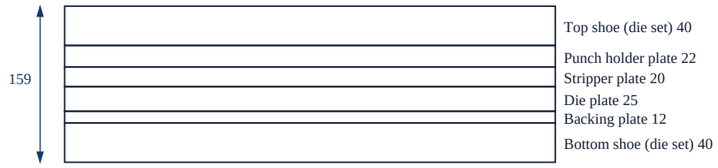

Main bill of material (processes are in the tool cost sheet)

Element	Qty	Grade	Make	Part no.
Die set 4-pillar die set 5040	1	C45 / S50C	Local die-set maker /	
Die plate (cutting)	1	D2 (1.2379)	Bohler / Daido	
Piercing punch (standard)	6		Misumi / Punch	
Punch holder plate	1	C45 / S50C	JSW / Tata	
Stripper plate	1	C45 / S50C	JSW / Tata	
Backing plate (hardened)	2	Mould base steel (4140	LKM / Futaba	
Stock guides & stopper	1	C45 / S50C	JSW / Tata	
Die springs / urethane	8		Danly / Misumi	
Screws, dowels & bolts (set)	1		Unbrako	

Notes: 1. Remove all sharp edges 0.2 x 45°. Do not scale the drawing. The 3D model is the master. · 2. CONCEPT layout for quotation and PO reference; the detailed tool design (3D and drawings of every part) is in Tool design → release pack.

Design to Cost
Drawing no. **EX26-0001-C-Stage2of3**
Rev **-**

Part	EX26-0001 · L mounting bracket	**Mould base / die set**	4-pillar die set 5040 · 500 × 400 mm
Tool / stage	Die 2: Piercing · Stage 2 of 3	**Plate material**	C45 / S50C · make Local die-set maker / Misumi
Operations	Piercing	**Tool cost (estimate)**	178,802 INR = 178,802 INR
Press / machine	PRESS-100 for 13.5 t	**Date**	2026-10-26 · Design to Cost

General tolerance	ISO 2768-mK
Projection	
Scale	as shown
Sheet	1 / 1
Drawn	Amit Shukla · 2026-10-26
Checked	-
Approved	-