SHEET-METAL TOOL PACK

EX26-0001 · L mounting bracket

Rev B · Galvanised steel GI · thickness 2 mm · bent part: Developed straight strip + bending stage (no bend lines or hole positions drawn)

Uses example rates – not for negotiation

Sheet rules and Strip rules are EXAMPLE values.

1 · Blank (flat pattern)

Blank 326.7 × 40.0 mm, area 13068 mm², holes: none drawn.

2 · Progressive strip layout

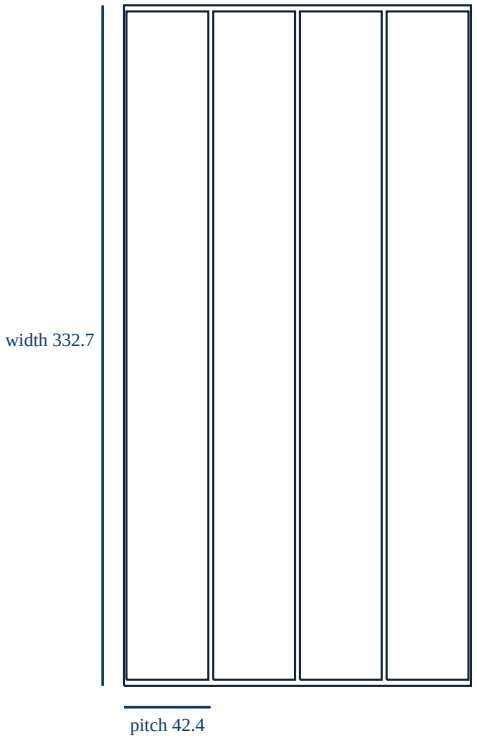

Item	Value
Feed	along the blank width
Pitch (mm)	42.40
Bridge (mm)	2.40
Edge margin (mm)	3.00
Strip width (mm)	332.70
Stations	4
Pilots	2 × Ø4.0

Item	Value
Material utilisation (%)	92.6
Other feed direction utilisation (%)	86.3

- Strip width 333 mm is above the limit of 300 mm (Parameters → strip_max_width_mm): use multi-stage or a wider line.

3 · Stages (simplified sketches)

1 · Blanking

2 · Piercing

3 · Bending (V)

#	Operation	Force (t)	Stage weight (g)
1	Blanking	49.4	205.2
2	Piercing	10.8	199.8
3	Bending (V)	0.5	199.8

Bend and draw stages are shown as the flat blank: the sketches are not formed-shape drawings.