

WHO ARE WE?



KBK PLASCON PVT. LTD. was established 1985 with the sole purpose of serving Pulp and Paper industry. In India, KBK PLASCON has been a pioneer in the field Of POLYMER products under the brand name of PLASCON for pulp & Paper industry, providing innovative and cost-effective solutions from time to time. We can manufacture and supply wide range of Dewatering Elements, where the length without joints will be 5 metre in Compression Moulding and 10 Metre by welding.

WHAT MAKES US SPECIAL?

- Total wire drainage solution of Paper machines.
 - Centri-cleaning unit a total Package- A unique concept of glass filled Unbreakable centricleaner/ assembly replacing 100% ceramic.
 - Dector blade of single length upto 10 mt. without joint.
 - UHMW PE Screen Plate (5mm. thick) for Johnson Screen replacing Stainless Steel screen increasing the life.
 - Wear plate for auto valve/washer.
 - Plascon segmented gears a unique concept for Dryer Gears.
 - KAYLON based single piece gears for dryer.
 - Engineering items like Idlers for Conveyor systems various sprockets/ rings for Rotary joints/ impellers/ bushes, etc. custom made, according to given drawings.
 - Plascon Pallets- Heavy duty, unbreakable, washable & resistant to chemicals for paper stacking and transportation.
 - Plascon Liner Plates Non sticking to foreign materials.
 - Metering Bar
- 

OUR PRODUCT RANGE

Paketel - Polyactel, POM sheets

Kaylon - Cat Nylon sheets & rods

Arete - Uhmwpe sheets for liners

Plascon - Products for Paper Industry, dewatering elements, dryer gears, meterin rods, CCN, etc.

PLACOSS - Products for coil storage system for steel industry, saddles, saddle pads

PLAGRO - Products for Agriculture & Food processing industry

POMARINO - Products for Marine industry, Fascia pads, rubbing strips, crane stoppers etc

PLABOTT - Products for Beverage, Bottling, Conveyor & Pharma industry

P-LPG - Products for LPG Industry

PLAMACON- Products for machine construction & plant engineering applications

PLASB - Products for asbestos sheet industry

PLASCON - Paper products
Dewatering products
Products for Head box
Plascon Vibrating Screen
Metering bar holder
Kaylon Gears
Sealing Strips
Bottom Lip/ Former Lip
Centri Cleaner nozzle

PLASCON ALLOYS FOR PULP & PAPER INDUSTRY




Our R&D Department successfully developed the following Alloys of Plascon which enhances the life, reduces the down time, thereby increases the productivity of the paper mills.

PLASCON-V



This is a virgin Ultra High Molecular Weight Polyethylene having low co-efficient of friction with good abrasion resistance & is white in colour. The wear & tear is slightly higher than other Plascon alloys suitable to use in slow speed machine upto 250 m./min.

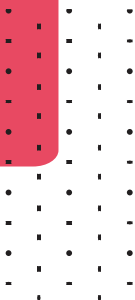

PLASCON SUPERSLIDE-P

In comparison to Plascon-V, SuperSlide-P is a 9.2 millions ml. wt. alloy with lubricating agents to give lower co-efficient of friction with higher wear resistance . Available in Green colour.



PLASCON-GRA



To be used in end sealing, packing inside the Suction Roll/ Couch Roll etc. the Polymer and improves the dimensional stability of the components. It is suitable. It is Plascon alloyed with Graphite & sliding additives. The filler addition strengthens.

PLASCON-M

Where there is lot of Silica contents coming with the stock, this sintered polyethylene reinforced with sliding additives & molybdenum disulphide (MOS₂) can provide excellent & uniform drainage with minimum wear & tear because of its very low co-efficient of friction. The fabric life also increases because of uniform & slow wear & tear & low co-efficient of friction. It is black in colour, suitable for sealing strips & metering bars.



PLASCON-GB



PLASCON GB is made by reinforcing the original sintered UHMW PE with homogenous glass beads powder to counter the stock which contains darts, fillers, fines & other foreign materials. By virtue of filler addition, the surface smoothness increased considerably & thus helps to increase the wire life.

PLASCON HI-TECH CERA




CERA is unique formulation of Plascon reinforced with microspheres of abrasion resistant silicon compound special dry lubricants. The fillers are dispensed homogenously in the polymer matrix & coupled with a coupling agent to improve the abrasion resistance. The superior reinforcing filler provides increased life to dewatering elements. CERA is strongly recommended for high speed machines. In PLASCON-CERA, we added further two varieties i.e. HI-TECH CERA & Low-tech CERA & its application is based on the speed of the paper machine

PLASCON-RIDER



This alloy was the result of our constant R&D work based on customers feedback. It is a doable sintered UHMWPE having molecular weight of 9.2 million. The extra high molecular weight Polymer coupled with sliding additives, imported ceramic additives & heat stabilizers impart strength, excellent abrasion resistance, coupled with low co-efficient of friction to the component. As a result, it provides excellent drainage with minimum wear & tear to the fabric alike. 100% ceramic materials. Life of components in this case increases substantially by 20-30%.

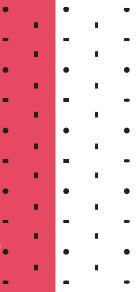

PLASCON-RIDER GLIDE



Rider Glide is a newly improved PLASCON Rider Alloy. It has all the benefits of Rider but has a unique lubricant/ sliding additive to bring down the coefficient of friction by almost 25%-30%. Lower coefficient of friction result in better life of both the dewatering elements that as well as the wire.


PLASCON PROPERTIES

Property	Unit	Testing Method	Plascon V	Plascon SuperSlide	Plascon M	Plascon GB	Plascon Hi-Tech CERA	Plascon Rider	Rider Glide
Density	g/cm ³	ISO 1183	0.93	0.96	0.95	0.96	0.96	0.97	0.97
Molecular Weight	g/mol in million	-	6.5	9.2	6.5	9.2	9.2	9.2	9.2
Tensile Strength	MPa	ISO 527	22	24	23	24	24	24	24
Elongation	%	ISO 527	450	410	450	420	410	400	400
Notched Impact Strength	KJm ²	ISO 11542	210	90	190	130	90	90	90
Shore Hardness D 5 s	-	ISO 868	66	70	66	68	70	70	70
Static co-efficient of friction	-	ASTM D1894	0.13	0.12	0.08	0.13	0.15	0.12	0.1
Wear by Sand & Slurry method	-	Internal Test Method	100	70	80	90	92	90	70
Colour	-		White	Green	Steel Grey	Orange	Banana Green	Chocolate Brown	Greyish Black

Plascon Material for different machine speeds

various type of material are available according to the different machine speeds of your machine.

With the quality of rider glide upto 800 MPM are available.

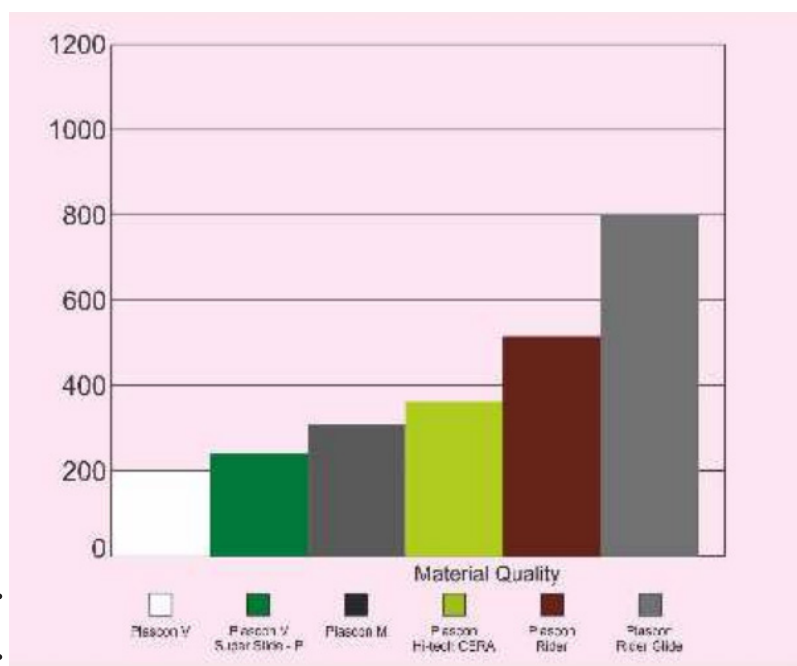



Wear Plate

PULP MILL



Impeller



Regulating Valve



Reject Nozzle



Nozzles



Pulleys

CONVEYORS



Impact Roller, Bushes & Bearings



Customised Pallet

FINISHING



Trolley Wheel

