

The strongest public baseline

Photorealistic 3D planning for Play Off 21, family 71-1145-XX. No animation has been created.

Five manufacturer views at 5154-5636 pixels, a bare ice-sheet photograph, component photos and a manufacturer assembly manual. Use them to begin a provisional model; measurements of the actual game determine the accepted geometry.

Feature	Published nominal size	Source / qualification
Overall length x width	960 x 500 mm	STIGA Sports; extent of rods unspecified
Overall length x width x height	Approx. 940 x 502 x 83 mm	STIGA Canada; conflicts with 960 mm length
Ice / actual playing area	Approx. 845 x 457 mm	STIGA Canada; verify inner board boundary
Figure height	Approx. 57 mm	STIGA Canada; height datum unspecified
Puck diameter	Approx. 25.4 mm	STIGA Canada; thickness not supplied
End plexiglass height x length	Approx. 70 x 622 mm	STIGA Canada; curved-length datum unknown
Absolute ice-sheet thickness	Unknown	25% increase advertised; no absolute value

Nominal is not measured. Do not average conflicting lengths or stretch the ice to an overall housing size. Inch conversions add no source precision. No public manufacturer CAD or dimensioned engineering drawing was found in the checked sources.

Official overhead

5636 x 5636 original pixels. Sweden/Finland variant 71-1145-01; current gallery artwork.



Use for: the installed board outline, markings, visible slots and figure placement. Figures and goals still hide parts of the tracks. Match the camera projection before comparing overlays; this is not a dimensioned orthographic plan.

Original photo: official overhead

Two opposite oblique views

Read the housing, goals, figures, rods and raised components together across these angles.



Oblique A - 5154 x 5154 pixels



Oblique B - 5192 x 5192 pixels

Source: [STIGA Sports five-view product gallery](#)

Both side profiles

Compare figure silhouettes, goal shape, board height and the raised rink assembly.



Side A - 5210 x 5210 pixels



Side B - 5208 x 5208 pixels

These views reveal relative heights, not exact millimetres. Separate loose-figure views with a scale are still needed for the pivot, blade and skate contacts.

Source: STIGA Sports five-view product gallery

The bare sheet exposes the tracks

2554 x 1617 pixels. Additional reference from the STIGA Canada Playoff 21 catalog.



Use for slot topology, not final scale or artwork. The sheet shows older sponsor graphics. Its outer edge may sit beneath the boards; it is not necessarily the playable boundary. Perspective and physical travel stops remain uncalibrated.

Source: STIGA Canada catalog

Component appearance references

Real catalog photographs. These add shape and material clues, but have no dimensional scale.



Puck - 1000 x 863 pixels.
Logo, rounded rim and black molded surface. Measure thickness, diameter and edge profile on the actual puck.



Finland team pack - 800 x 600 pixels.
Useful for figure identity and uniform details. Packaging obscures and distorts some surfaces; it cannot replace loose-figure close-ups.

Also included: a 1001 x 603 overhead photograph of the older Canada/Sweden artwork. Keep it separate from the current five-view gallery.

Source: [STIGA Canada catalog component images](#)

Manufacturer parts and control assemblies

Play Off 21 manual A06, page 18. Manufacturer-authored; OTTO-hosted PDF.

GB

FR

SPECIFICATION / SPÉCIFICATION



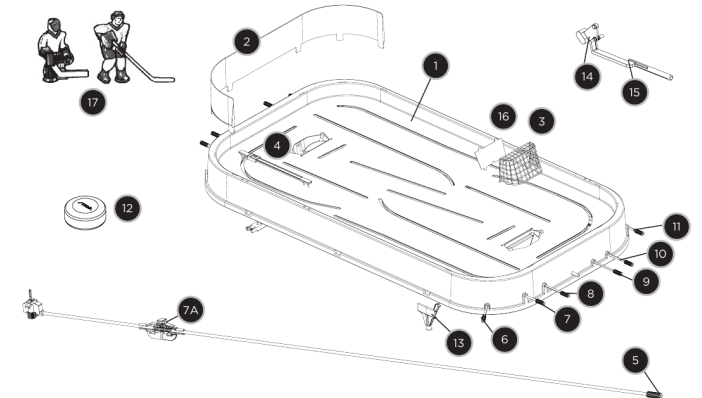


Fig.	Qty./Qté	Article	Description	Description	Notes/Remarques
1	1	7111-0393-01	Ice sheet - Play Off	Plaque de glace - Play Off	
1	1	7111-0393-03	Ice sheet - Stanley Cup	Plaque de glace - Coupe Stanley	
2	2	7111-0348-01	Plexi glass	Fin de verre	
3	1	7111-0526-01	Goal	But	Kit of 2/Ens de 2
4	1	7111-9072-02	Goal counter strip	Bandes de compteur	Kit of 2/Ens de 2
5	2	7111-9016-00	Handle, Red	Poignée pour tige, Rouge	Kit of 6/Ens de 6
6	2	7111-9083-02	Control rod goalie	Tige de commande, gardien	
7	2	7111-9083-06	Control rod left wing	Tige de commande, a-gauche	
7A	2	7111-9073-01	*Link	*Lien	Kit of 2/Ens de 2
8	2	7111-9083-07	Control rod left def.	Tige de commande, d-gauche	
9	2	7111-9083-01	Control rod centre	Tige de commande, centre	
10	2	7111-9083-03	Control rod right def.	Tige de commande, d-droit	
11	2	7111-9083-04	Control rod right wing	Tige de commande, a-droit	
12	1	7111-9079-01	Puck	Rondelle	Kit of 3/Ens de 3
13		7111-9074-01	Foot White/Black	Jambe Rouge/Noir	Kit of 4/Ens de 4
13	1	7111-0574-01	Foot Black/Red	Jambe Noir/Rouge	Kit of 4/Ens de 4
13	1	7111-9074-11	Foot Black/Black	Jambe Noir/Noir	Kit of 4/Ens de 4
14	2	7111-0332-01	Puck ejector	Éjecteur de rondelle	
15	2	7111-0333-01	Puck ejector arm	Éjecteur de rondelle, bras	
16	1	7111-0526-11	Deflector	Défecteur	Kit of 2/Ens de 2

What this resolves

Component identities, the separate goalie/skater controls, and a linkage identified on the left-wing control assembly.

What it does not resolve

Exact path coordinates, pivot offsets, gear ratios, backlash, contact surfaces or travel stops. The exploded illustration is not a scale drawing.

Useful part identifiers

Ice: 7111-0393-01

Goals: 7111-0526-01

Pucks: 7111-9079-01

Goalie control: 7111-9083-02

Left-wing control: 7111-9083-06

Linkage: 7111-9073-01


Footer: 8200-0514-05 A06 / 2024-02-29.

The complete 20-page manual is included in the pack. Page 17 shows figure variants.

[Open manufacturer manual](#)

Complete the model with measured captures

The retail assembly and the tournament configuration can differ. Preserve the actual setup.

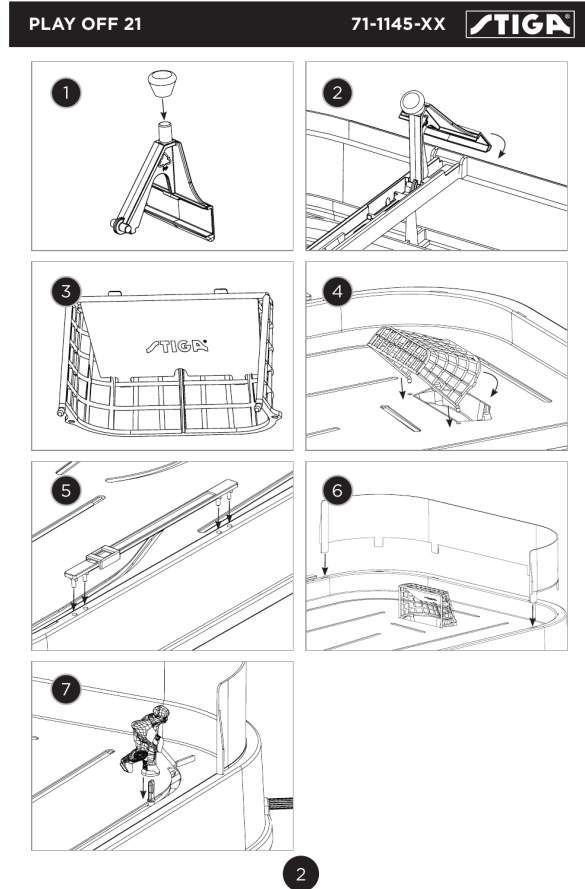

STIGA manual, page 2: supplied parts and assembly. The white insert/deflector is shown inside the goal.

Source: STIGA assembly manual

Goal configuration

ITHF Tournament Rules, valid from 8 September 2025, section 3.3, remove the supplied white goal net inserts and goal cups, while retaining the plexiglass screens. Model the setup used in the demonstration.

Capture next, in priority order

1. Empty installed rink, perpendicular overhead, with scale markers in both directions.
2. Loose and installed figures: pivot, blade offset/profile, skates and ice clearance.
3. Both travel stops and rod push/pull + twist recordings for each control type.
4. Puck thickness, diameter, rim profile and mass; goal clearance and posts.
5. Sharp high-frame-rate shot recordings for contact and dynamics calibration.

Source: ITHF Tournament Rules, section 3.3