Wee Dig Dug: Documentations

Anand Balakrishnan
anandbal@buffalo.edu

Amrit Pal Singh
asingh42@buffalo.edu

May 8, 2017

Contents

1 User Guide

1.1 Introduction

Welcome to **Wee Dig Dug**, a simplified, text-based version of the popular arcade game **Dig Dug** by Namco!. The following project was written in ARM Assembly for the LPC2138 Education Board, with the ARM7TDMI architecture.

You are playing as Mr. Wee Dug, a glorious knight and miner (yes, it is an unconventional combination). You have been recruited by some villagers to kill a few beasts and you get paid depending on what kind of beast you kill.

- Kill a **FYGAR**, a species of vicious dragons, known to take a 100 knights to defeat a single one, and you get 100 points.
- Kill a **POOKA**, often mistaken for a cute, cuddly creature until it tries to eat you up, and you get 50 points.

1.2 Setup

Before playing the game, please make sure of the following:

1. You are connected to the correct COM port on PuTTy, and at a baud rate of **115200 baud**.
2. Resize the console window to a minimum of 30 rows × 130 columns.
3. Be prepared to enjoy the game.

To start playing, just flash the code onto the LPC2138 board.

1.3 Instructions

You are the character ***Dug*** and your job is to :

1. Dig through as much of the sand as you can.
2. Kill all enemies.
3. **You must kill all the enemies withing 2 minutes or else you die**.

You can move ***Dug*** using the `W,A,S,D` keys which correspond to `UP,DOWN,LEFT,RIGHT` respectively and shoot your bullet using `SPACEBAR`. You can use the 5th Momentary Push Button to `PAUSE` the game whenever you want.

2 Developer Guide

3 Design

The game is designed based on the **Model-View-Controller (MVC)** architecture. This architecture is a common way of designing applications with a User Interface. In it, each of the following components is responsible for a particular task, and only that component is allowed to perform that task.

Model	This is the part of the framework responsible for maintainin the internal representation of the application. The **Model** in this game holds the location where sand is present, state of each sprite and state variables of the game.
View	The **View** is responsible for rendering the **Model** onto the GUI. It contains routines that display the board, the sprites and the sand on a console screen.
Controller	The **Controller** is responsible for handling user input and triggering changes in the **Model**. It contains the entry point for the game and interrupt handlers.

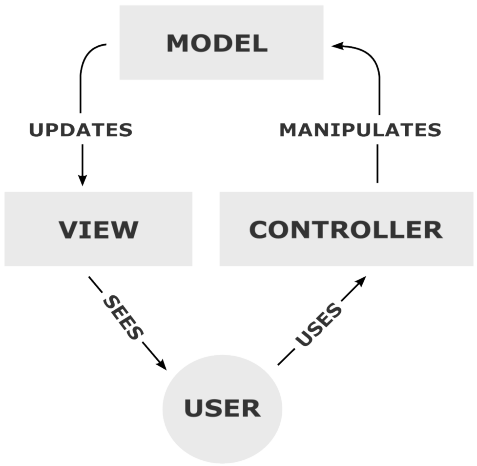

Figure 1: The components of the framework interacting with each other (courtsey: Wikipdia)

3.1 Controller

FILES: `controller.s`

The **Controller** mainly contains interrupt handlers, and it is also the entry point for the game. In is, we do the following:

- Initialize timer and timer match registers for periodic interrupts.
- Listen for UART0 interrupt, read the keystrokes and perform the corresponding action.
- Listen for External Interrupt Button press and PAUSE the game.

The **Controller** is a relatively small component, responsible mainly for updating the **Model** via subroutines exposed by the **Model**.

```
1 SPRITE
2   DCD X_POS ; Holds X coordinate of the sprite
3   DCD Y_POS ; Holds Y coordinate of the sprite
4   DCD LIVES ; Holds Number of lives the sprite has
5   DCD DIRECTION ; Code for direction the sprite is moving/facing
6   DCD OLD_X_POS ; Previous X coordinate of sprite
7   DCD OLD_Y_POS ; Previous Y coordinate of sprite
8   DCD ORIGINAL_X  ; Original X position (to reset when respawning)
9   DCD ORIGINAL_Y  ; Original Y position (to reset when respawning)
```

Listing 1: Structure for `SPRITE` data

3.2 Model

FILES: `model.s`, `collisions.s`

The **Model** maintains the internal representation of the board and triggers **View** updates. It exposed routines that allows the **Controller** to trigger updates on the **Model**.

3.2.1 Implementation

The **Model** consists of an *"array"* (created using the `FILL` directive) of size 19×15 bytes, each byte representing a grain of sand.

The **Model** also consists of `DCD` tables to hold information of sprites. These tables are structured similar to a `struct`. There are also staticaly defined regions of memory that keep track of the various states the game could possibly be in, for example, `PAUSE`, `GAME_OVER`. The **Model** is also responsible for keeping track of other variables of the game, such as, `LEVEL`, `HIGH_SCORE`, `CURRENT_SCORE` and `TIME`.

3.2.2 Operations

Operations that are defined by the **Model** are:

- Initialize and reset model.
- Move sprites and update entire model.
- Handle and detect collisions.
- Get if sand exists at given (x,y) coordinate on the board.
- Clear sand at given coordinate (x,y).
- Toggle game states (`BEGIN_GAME`,`PAUSE`, `GAME_OVER`, `RUNNING`).
- Update individual sprites.
- Spawn sprites.

3.3 View

FILES: `gui.s`, `peripherals.s`

The **View** is responsible for rendering **Model** onto the GUI. It possessed routines that the **Model** uses to trigger updates to the GUI. This implementation was chosen as updates can be triggered as and when the **Model** is updates.

3.3.1 Implementation