


I. GAUGES FOR SHOULDER-BREECHING CARTRIDGES


FIGURE I
SHOULDER-BREECHING CENTERFIRE RIFLE HEADSPACE GAUGES

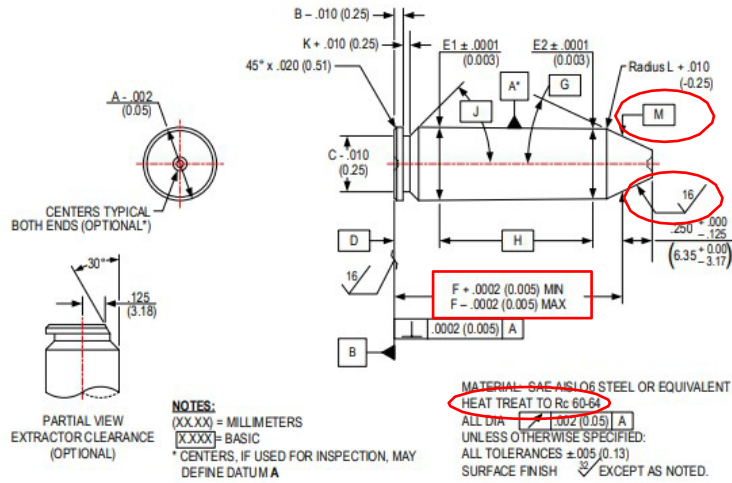


CARTRIDGE	"F" (GO- MINIMUM)) +.0002 (inches)	"F" (NO-GO MAXIMUM)) -.0002 (inches)	M
6.5 Creedmoor	1.541	1.551	.400
7.62 x 39	1.252	1.262	.3662
7.62x51 (NATO)*	1.6300	1.6400	.400
300 AAC Blackout	1.0789	1.0889	.351
300 Norma Magnum	2.036	2.046	.455
300 Winchester Magnum**	.220	.227	.533
338 Norma Magnum	2.0101	2.0201	.475
5.56mm (NATO, ARMY)*	1.4646	1.4730	.330
277 Fury	1.6800	1.6870	.400

*NATO Reference drawings attached after table.


** 300 Winchester Magnum is belted see Belt-Breeching SAAMI drawing.

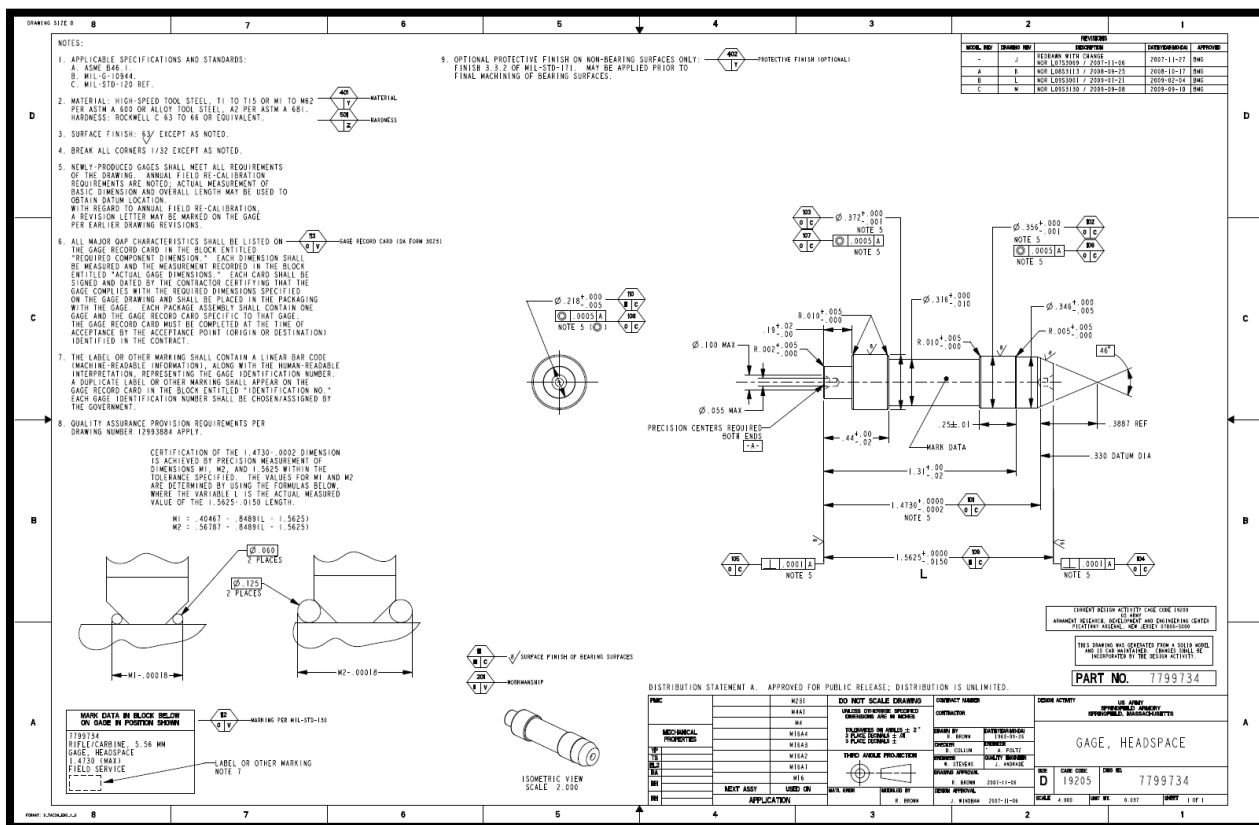

**FIGURE II
BELT-BREECHING CENTERFIRE RIFLE HEADSPACE GAUGES**

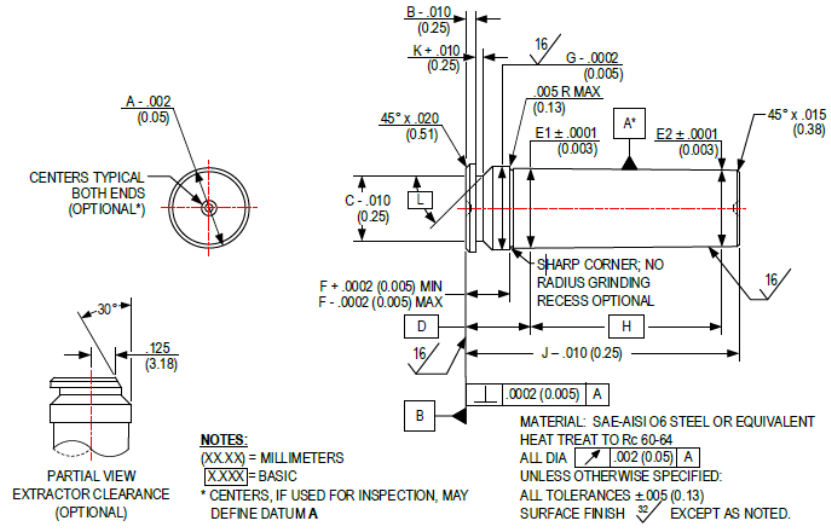

3		2		1	
ALL SHEETS ARE SAME REV.		REVISIONS			
REV		DESCRIPTION		DATE	APPROVE

[illegible]