

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN: 38E9313601	Rev: 01	Key Op: A02
LSD-47	USS RUSHMORE		38E9213601		

TITLE: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace
Rev-01(FO1)~Deck Coaming on 06 Level Weather Deck; repair

JOB SPECIFICATION

Anticipated Award Date: 7/16/2026	Production Completion Date: 4/8/2027	PREPARING ACTIVITY: SASEBO	
POP Start Date: 9/14/2026	POP End Date: 6/30/2027		
PREPARED BY: N.MATSUYA	CODE H_MA	DATE 10/29/2024	
APPROVED BY: S.MURAKAMI	CODE S225		
CONCURRED BY: S.MOROOKA	CODE S231		
ASSIST PLANNER'S NAME:	CODE		
ASSIST PLANNER'S NAME:	CODE		
ASSIST PLANNER'S NAME:	CODE		
All pages of this documents will change ICN from 38E9213601 to 38E9313601 where written as shown on this cover sheet. All pages of this documents will change avail from 5C1 to 6C1 where written as shown on this cover sheet.			
DESCRIPTION:			
JSN(S): ES01-NP73 and ES01-NP74		CASREP #	
S/F CONTACT: CIV		CWP #	CCNS #
Approved by S300/S900 <i>[Signature]</i>		Date: 8/29/25	Avl: 5C1 ^{6C1} <i>S. Jones</i> 8/29/25 LWC:
Work Completed			
S/Force:	Rate:	Date:	
Ship Supt:	Date:	SRF CONTROL NO.: 1301321795	
WORK CERTIFICATION SIGNATURES			
COMPLETION OF WORK REVIEW:	BADGE NO.:	SHOP/CODE:	PHONE: DATE:

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN: 38E9313601	Rev:	Key Op:
LSD-47	USS RUSHMORE		38E9213601	01	A02
TITLE: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace					
Rev-01(FO1)-Deck Coaming on 06 Level Weather Deck; repair					

1. SCOPE:

1.1 Title: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace
Rev-01(FO1)-Deck Coaming on 06 Level Weather Deck; repair

1.2 Location of Work:

1.2.1 Weather Deck 06 Level, Frames 30-59, Starboard

1.2.2 Senior Troop NCO Living Space (05-29-1-L)

1.2.3 Light Trap (05-57-3-L)

1.3 Identification:

1.3.1 Quantity (2 EA), Deck Coaming (Approximate Total Area: 3 SF), Located in 1.2.1, See ENCLOSURE (A)

1.3.2 Quantity (One EA), Brace of MISC Portable Davit Socket (Approximate Area: 0.5 SF), Located in 1.2.1, See ENCLOSURE (A)

2. REFERENCES:

26

2.1 Standard Items (FY25)

2.2 139-6102535 Rev C, Unit 460 06 Deck FRS 53-59 S/S

2.3 139-6102539 Rev C, Unit 464 06 Deck FRS 21-31 S/S

2.4 611-6100360 Rev H, Misc Davits & Sockets ARR & DET

2.5 635-6101907 Rev C, Insulation ARR Thermal & Acoustic 03 Level & Above

2.6 S9086-DA-STM-010/CH-100/Rev 4, Hull Structures

2.7 803-1645271 Rev F, Load Handling Davits, 500 to 3,000 Pounds, Aluminum and Steel

3. REQUIREMENTS:

3.1 Accomplish the requirements for repair of each structure and brace of MISC portable davit socket listed in 1.3.1 and 1.3.2 as follows, using 100-2.8 of 2.6, 2.2 through 2.5 and ENCLOSURE (A) for guidance.

3.1.1 Remove each damaged, fabricate and install each new deck coaming listed in 1.3.1 out of each new 3/16 inch thick mild steel plate conforming to ASTM A36.

3.1.2 Remove each damaged, fabricate and install each new brace of MISC portable davit socket listed in 1.3.2 out of each new 1/4 inch thick mild steel plate conforming to ASTM A36.

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN:	Rev:	Key Op:
LSD-47	USS RUSHMORE		38E9213601	01	A02
TITLE: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace Rev-01(FO1)~Deck Coaming on 06 Level Weather Deck; repair					

3.1.3 Accomplish the requirements of 009-12 of 2.1, including Table 2, Column A Lines One through 7 for welding.

3.1.3.1 Accomplish nondestructive testing of each new welding joint of MISC portable davit socket listed in 1.3.2 in accordance with Line 10 or 11, and Non-destructive Inspections 1.A and 1.B of 2.7. (See NOTE 4.3)

3.1.4 Accomplish the requirements of 009-25 of 2.1 for a local air hose test of each welded section of watertight boundary. Allowable leakage: None.

3.2 Accomplish the requirements of 009-32 of 2.1 for cleaning and preservation of each new and disturbed surface to match surrounding areas.

4. NOTES:

4.1 Initial Condition - Several corrosion holes there are deck edge coaming and MISC portable davit socket located in 06 level weather deck.

4.2 SRF Tool room will issue pressure gauges and depth gages when required.

4.3 A load test is not required for repaired existing MISC portable davit socket. It has been determined by S246 official email response to TP request on 10/25/2024.

4.3.1 NDT inspection (MT or PT) is required by 2.7 for repaired brace on the existing MISC portable davit socket.

4.4 Nonskid deck covering work will be covered by 38E9213601_00_A01.

5. GOVERNMENT FURNISHED MATERIAL (GFM) :

5.1 Government Furnished Materials.

MATERIAL LIST									
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	HAZ MAT	DOC NO.	QTY /UNIT	Para No.
001			M	PLATE, METAL, 1/4"THK, 48IN X 8FT, ASTM A36	9B 9515 009526280	N	4292B021	1/PM	3.1
002			M	PLATE, METAL, 3/16"THK, 72IN X 10FT, ASTM A36	9B 9515 002671176	N	4303B103	2/PM	3.1

5.2 Listed Material will be provided by ICN 38E9213601_A01.

MATERIAL LIST									
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	HAZ MAT	DOC NO.	QTY /UNIT	Para No.
002			M	ELECTROD, WELDING, 7018M, 3/32"DIA X 14"L, MIL-E-22200/10, P/N; 255014102, 10LB/CN	9G 3439 SA4742861	N	4004E905	20/CN	-


Ship/HULL NO.	Ship/HULL NAME	JON:	ICN:	Rev:	Key Op:
LSD-47	USS RUSHMORE		38E9213601	01	A02

TITLE: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace

Rev-01(FO1)~Deck Coaming on 06 Level Weather Deck; repair

MATERIAL LIST									
ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	HAZ MAT	DOC NO.	QTY /UNIT	Para No.
003			M	ACOUSTIC BOARD, 2"THK, 2 FT X 3 FT, MIL-DTL-32585 TYPE II FORM 1, FACING C	9Q 5640 007565866	N	3362B002	6/BX	-
004			M	INSULATION BOARD, 2"THK, 2 FT X 3 FT, MIL-DTL-32585 TYPE I FORM 1, FACING B	9Q 5640 008096315	N	3362B003	4/BX	-
005			M	INSULATION BOARD, 1"THK, 2 FT X 3 FT, MIL-DTL-32585 TYPE I FORM 1, FACING B	9Q 5640 008096312	N	3362B004	6/BX	-
006			M	SNAP FASTENER, AL, CAP	9B 5325 007377648	N	3362B005	5/HD	-
007			M	TAPE, TEXTILE, 2"W X 50YD/RL, MIL-C-20079H TY-II	9B 8315 002671632	N	3362B006	20/RO	-
008			M	ADHESIVE, MIL-A-3316C, CL-1	9B 8040 002738708	Y	3361EX01	8/GL	-

Ship/HULL NO.	Ship/HULL NAME	JON:	ICN:	Rev:	Key Op:
LSD-47	USS RUSHMORE		38E9213601	01	A02
TITLE: Nonskid Deck Covering and Deck Plate at 06 Level Weather Deck; replace					
Rev-01(FO1)~Deck Coaming on 06 Level Weather Deck; repair					

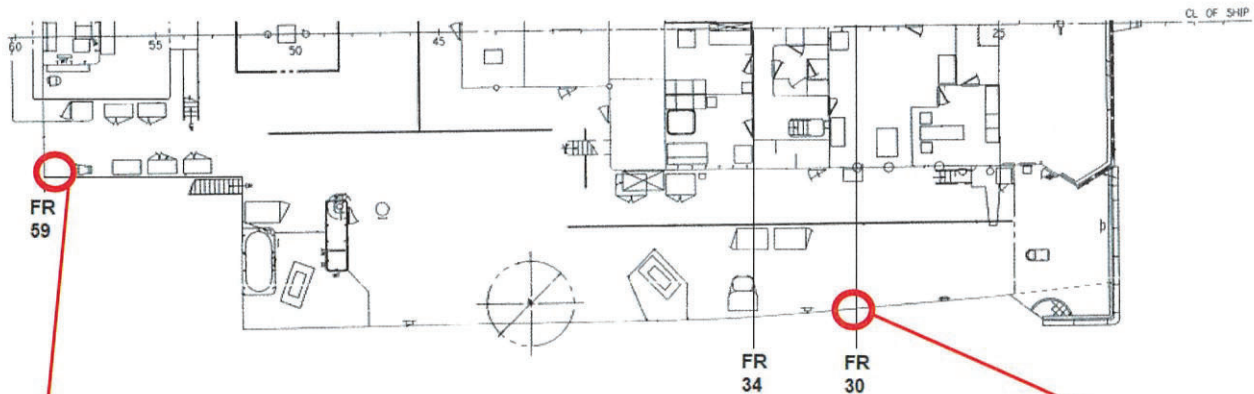

<Finding 1-a-2 in CCIMS report>

Tow holes, 6" LG x 1/2" dia, in deck coaming as a part of the longitudinal watertight bulkhead at 20'-0" STBD of CL, located at 9" and 13" FWD of FR 59, respectively. And 2" dia hole in outboard brace of deck socket for MISC portable davit.

<Finding 1-a-1 in CCIMS report>

2" LG x 1/2"H hole in deck coaming as a part of the deck house side starboard at 9" FWD of FR 30.5 and 1" above 06 level. It is located inside of the liferail for NULKA Launcher #1B.

Plan (STBD) : 06 Level Weather Deck