
RFQ How-To Guide

REQUIREMENTS
EXAMPLES &
CHECKLISTS

Huntsville Center,
Centralized Furnishings
Program

FOR INFORMATION ONLY

Table of Contents

Purpose of the RFQ How To Guide:	6
Submitting a RFQ Technical Response:	6
Technical Response Submittal Map for Bookmarking.....	6
Check Your Submittal	8
Cover Page:	8
Item Number Product Data Sheet:	8
Plan Views:.....	8
Plan Views - Electrical / Data:	8
Checklist - Elevation Views – Segmented Panel Details:	8
Isometric Views, includes Electrical / Data:.....	8
FID Item Number Compliance Documentation:.....	9
Construction and quality Compliance Documentation:.....	9
Testing Documentation:	9
Environmental Documentation:	9
Warranty Documentation:	9
Cover Page	10
Purpose:	10
Required Usage:.....	10
What Information Should Be Noted on the Cover Page?	10
Checklist - Cover Page:.....	10
Example – Cover Page	10
Item Number Product Data Sheets.....	11
Purpose:	11
What FID Items Require Item Number Product Data Sheets?	11
What Information Should Be Noted on the Item Number Product Data Sheet?	11
Checklist - Item Number Product Data Sheet:.....	11
Tips to Avoid Common Mistakes:	11
Scenario - Wood Casegoods	12
Example – Item Number Product Data Sheet.....	13
Drawing(s) –Plan Views	14

Purpose:	14
What FID Items Require Plan Views?	14
Plan Views:	14
Plan Views - Electrical / Data:	14
What Information Should Be Noted on Drawings?	14
Checklist - Plan Views:	14
Checklist - Electrical / Data Plan Views:	15
Tips to Avoid Common Mistakes:	15
Scenario - Panel Supported Workstations	16
Example – Overall Cluster Plan View:	19
Example – Typical Plan View:	20
Examples – Typical Electrical / Data View:	21
Drawing(s) – Elevation View - Segmented Panel Detail(s)	22
Purpose:	22
What FID Items Require Elevation Views?	22
What Information Should Be Noted on Elevations?	22
Checklist - Elevation Views – Segmented Panel Details:	22
Tips to Avoid Common Mistakes:	22
Scenario - Panel Supported Workstations	23
Example – Segmented Panel Detail – Typical(s):	24
Example – Elevation View - Segmented Panel Detail – Typical(s):	26
Drawing(s) - Isometric Views	28
Purpose:	28
What FID Items Require Isometric Views?	28
What Information Should Be Noted on Isometric Views?	28
Checklist – Isometric Views, includes Electrical / Data:	28
Tips to Avoid Common Mistakes:	28
Scenario - Panel Supported Workstations	29
Example - Isometric View – Overall Cluster:	32
Example - Isometric View – Typical(s):	34
Example - Isometric View – Interior:	35
Examples – Isometric Views – Exterior:	36

FID Line Item Compliance Documentation	38
Purpose:	38
What FID Items Require Compliance Documentation?	38
What Information Should Be Included for FID line item Compliance Documentation?	38
Checklist –FID Line Item Compliance Documentation:	38
Tips to Avoid Common Mistakes:	38
Scenario – Wood Casegoods.....	39
Example – Compliance Documentation - Catalog Sheet:.....	40
Example – Compliance Documentation – Catalog Sheet, Cont'd.:	42
Example – Compliance Documentation – Components List:	44
Construction and Quality Requirements Documentation	45
Purpose:	45
What FID Items Require Construction and Quality Compliance Documentation?	45
What Information Should Be Included for Compliance Documentation?	45
Checklist – For Construction and Quality Compliance Documentation:	45
Tips to Avoid Common Mistakes:	46
Scenario – Wood Casegoods.....	46
Example– Construction and Quality Compliance Documentation:	50
Example– Construction and Quality Compliance Documentation Cont'd.:	51
Testing Documentation	52
Purpose:	53
What FID Items Require Testing Documentation?	53
What Information Should Be Included in Testing Documentation?	53
Checklist – Testing Documentation:	53
Tips to Avoid Common Mistakes:	53
Scenario – Ergonomic Task Seating	54
Example – Test Report:.....	56
Example – Accreditation Certificate:	58
Environmental Documentation	59
Purpose:	59
What FID Items Require Environmental Documentation?	59
What Information Should Be Included in Testing Documentation?	59

Checklist – Requirements for Environmental Documentation:	59
Tips to Avoid Common Mistakes:	59
Scenario – Ergonomic Task Seating	60
Example – Third Party Certificate:	61
Warranty Documentation	62
Purpose:	62
What FID Items Require Warranty Documentation?	62
What Information Should Be Included in Warranty Documentation?	62
Checklist – Requirements for Warranty Documentation:	62
Tips to Avoid Common Mistakes:	62
Scenario – Ergonomic Task Seating	62
Construction and Quality Requirements- Warranty Requirements:	63
Example – Warranty:	64

FOR INFORMATION ONLY

What is a RFQ?

An RFQ is a request for quote by a contracting entity.

Purpose of the RFQ How To Guide:

This guide is offered by the Centralized Furnishings Program to help vendors understand the types of documentation and describe the format in which the documentation should be provided in a RFQ Technical Response Submittal.

Submitting a RFQ Technical Response:

Vendors interested in submitting a RFQ response shall follow all instructions provided within the RFQ contract requirements and Attachment 2, Furniture Item Description (FID), FID Submittal Requirements in Section 1.0. Questions should be directed to the Contracting Specialist POC in order to receive guidance.

Within this guide, examples of various types of supporting documentation are simulated to illustrate the general format technical reviewers expect to be included in a submittal to satisfy FID requirements.

Be organized and consistent. Technical responses shall be organized and bookmarked by FID item numbers. Under each FID item number, bookmark the supporting documentation such as drawings, line item description, construction and quality compliance requirements, testing, environmental, and warranty documentation. Create clear references to a FID item by annotating and/or highlighting the supporting documentation. In the event documentation is applicable to more than one item number, documentation can be located under the first item number where the documentation is required. All item numbers that apply to the documentation shall be clearly indicated on the supporting documentation.

Be searchable and compact. Technical responses shall be formatted using Adobe Acrobat Portable Document File (.PDF). When converting and inserting files to a .pdf, the vendor should verify information has been bookmarked per the order outlined in the FID Submittal Requirements in Section 1.0. One electronic file is preferred but it is understood some vendors may have limits for transmitting file over a certain size. We kindly request the submittal response be compacted to as few files as possible to save the vendor time in formatting and organizing and to save the reviewer time during technical review.

Be accurate and specific. Technical response documents shall be fully coordinated with all required documents in the submittal. Product information in the response should match and support the information entered into the Attachment #1. Provide only supporting documentation that specifically indicates your submittal satisfies the FID requirements. Additional unnecessary information adds time to a vendor's submittal preparation and to the overall review process.

Technical Response Submittal Map for Bookmarking

Cover Page

Table of Contents – Optional

Item Number - Product Data

Product Data Supporting Documentation

Drawings

Line Item Compliance Documentation:

Construction and Quality Compliance Documentation:

Testing Documentation:
Environmental Documentation:
Warranty Documentation:

FOR INFORMATION ONLY

Check Your Submittal

Please use this as a tool for a final quality check for your response. This list of items is consolidated from each section of the How-To Guide as a quick reference tool to assist vendors in quality checks prior to submitting their response. It is not a substitute for any requirement outlined in the guide or identified in the RFQ and its attachments.

Cover Page:

- ☐ Solicitation Number
- ☐ Project Name
- ☐ Project Number
- ☐ Project Location
- ☐ Technical Response Submittal Round: i.e, Initial Submittal, 1st Round, 2nd Round, etc.
- ☐ Date

Item Number Product Data Sheet:

- ☐ Data Sheet for each Line Item Number
- ☐ Item Number
- ☐ Item Description
- ☐ Manufacturer
- ☐ Product Line
- ☐ Model number(s) for each item and its components or bookmark a separate list included within section
- ☐ Product Description
- ☐ Overall Dimensions
- ☐ Product Image or bookmark a separate larger or detailed image included within section
- ☐ Proposed Fabric(s) and Finish(es) quoted and/or bookmark finish cards included within section
- ☐ Fabric Grade or bookmark finish cards identifying grade included within section

Plan Views:

- ☐ Item Number
- ☐ Item Description
- ☐ Plan of Overall Cluster
- ☐ Detail Plan of Each Typical
- ☐ Label the required components of each typical, CADD graphic tags may be used to identify required components and dimensions
- ☐ Dimension overall cluster
- ☐ Dimension overall typical(s)
- ☐ Turn off unnecessary tags to ensure plan is legible
- ☐ Provide electrical / data components on a separate drawing

Plan Views - Electrical / Data:

- ☐ Item Number
- ☐ Item Description
- ☐ Detail Electrical / Data Plan of each typical in a cluster
- ☐ Label required components of electrical / data components, CADD graphic tags may be used to identify required components and dimensions
- ☐ Indicate location (baseline / beltline) if possible. This may be shown on elevation as well
- ☐ Dimension overall cluster
- ☐ Dimension overall typical(s)
- ☐ Turn off unnecessary tags to ensure electrical / data notes and locations are legible
- ☐ Provide cluster/typical components on a separate drawing

Checklist - Elevation Views – Segmented Panel Details:

- ☐ Item Number
- ☐ Item Description
- ☐ Segmented Panel Details of each side of each typical in cluster
- ☐ Details show location of components, such as tile locations, alignment of panel frames, power/data locations at all raceways
- ☐ Provide details as a separate drawing(s). These drawings may be submitted on the same page with other drawings as long as the graphics and text are legible
- ☐ Include labels or key notes to indicate required vertical components of typical/cluster. CADD graphic tags may be used identified required components
- ☐ Turn off unnecessary tags to ensure plan is legible

Isometric Views, includes Electrical / Data:

- ☐ Item Number
- ☐ Item Description
- ☐ Detail Isometric of overall workstation cluster
- ☐ Detail Isometric of each typical in cluster
- ☐ Detail Exterior and Interior Views locating vertical locations of components, such as alignment of panel frames, electrical/data locations at beltline and base raceways; multiple views as required

- ☐ Provide an isometric view as a separate drawing. These drawings may be submitted on the same page with other drawings as long as the graphics and text are legible
- ☐ Include labels or key notes to indicate required vertical components of typical/cluster. CADD graphic tags may be used identified required components
- ☐ Turn off unnecessary tags to ensure plan is legible

FID Item Number Compliance Documentation:

- ☐ Annotated Item Number(s)
- ☐ Manufacturer's product information as described above with quoted model numbers and features annotated and/or highlighted.
- ☐ Annotation Notes and/or Highlights shall identify required salient features, specific model numbers, quoted options, dimensions, and any dimensional ranges.
- ☐ Fabric/Finish Selection Cards, if not provided on Item Number Product Data Sheet.
- ☐ Bookmark or key annotations / notes specific to an item number, if multiple items are referenced.
- ☐ Drawings are keyed to parts or components list.

Construction and quality Compliance Documentation:

- ☐ Annotated Item Number(s)
- ☐ Manufacturer's product information as described above with quoted model numbers and features annotated and/or highlighted.
- ☐ Annotation Notes and/or Highlights shall identify required Construction and quality technical specifications and construction for the item number quoted
- ☐ Bookmark or key annotations / notes specific to an item number, if multiple items are referenced

Testing Documentation:

- ☐ Item Number(s)
- ☐ Item Description
- ☐ **Actual Test Reports** for the required standard shall **include** the following components:
 - Test Standard and Edition Date (i.e., X5.5-2008)
 - Manufacturer
 - Product Tested
 - Model Number
 - Date(s) Tested
 - Test Procedures / Description
 - Observations
 - Acceptance Levels (Functional / Proof Loads)
 - Results
 - Photographs, optional
 - Test Equipment, optional
 - Verifiable digital signature containing encryption or handwritten signature, date, and title of the company official accepting technical responsibility for testing
 - Statement testing and certification apply to the product offered and that products offered meet all applicable test requirements (Note: This statement is a component of an actual test report and is not intended to be submitted in lieu of an actual report.)
- ☐ Lab Accreditation Documentation containing include (1) of the following methods of documentation for testing results:
 - Lab accreditation number and certificate number for facility type.
 - Documentation of 3rd party certification of test results.
 - If one of the above is not available, provide photographs of actual testing processes that demonstrate the methodology used is in compliance with BIFMA guidelines.

Environmental Documentation:

- ☐ Item Number(s)
- ☐ Item Description
- ☐ Manufacturer Name
- ☐ Product Name
- ☐ Third Party Certificate
- ☐ Environmental Compliance Statement has been checked – Refer to RFQ Attachment 7

Warranty Documentation:

- ☐ Item Number(s)
- ☐ Manufacturer
- ☐ Warranty Coverage Period for quoted item
- ☐ Manufacturer's Letter of Warranty Expansion to meet FID Section 2.0 warranty requirements, if standard warranty does not satisfy requirements.

Cover Page

Purpose:

Introduce information submitted in the technical response by vendor.

Required Usage:

Provided at the front of Technical Response Submittal.


What Information Should Be Noted on the Cover Page?

Checklist - Cover Page:

- ☐ Solicitation Number
- ☐ Project Name
- ☐ Project Number
- ☐ Project Location
- ☐ Technical Response Submittal Round: i.e, Initial Submittal, 1st Round, 2nd Round, etc.
- ☐ Date

Graphics may be used to create a distinctive presentation of submittal information. Cover page shall contain all required information listed in the checklist above.

Example – Cover Page

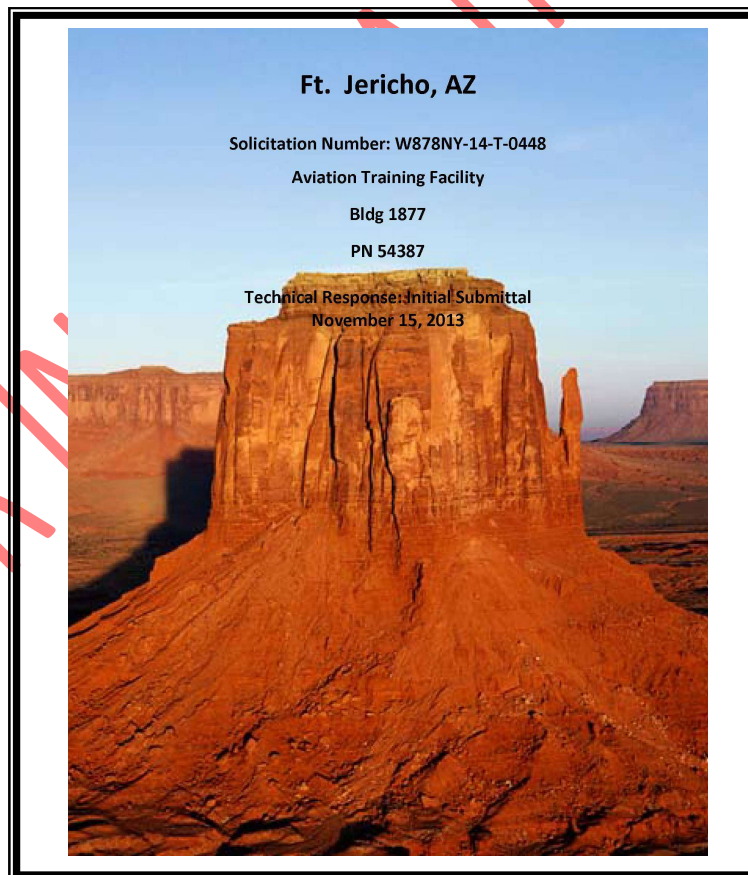

Item Number Product Data Sheets

Purpose:

Present required product information for specific FID item number in an organized and consistent format for efficient technical review.

What FID Items Require Item Number Product Data Sheets?

All items listed in FID sections and on should have an Item Number Product Data Sheet.

What Information Should Be Noted on the Item Number Product Data Sheet?

Checklist - Item Number Product Data Sheet:

- ☐ Data Sheet for each FID section item
- ☐ FID Section Number
- ☐ Item Number
- ☐ Item Description
- ☐ Manufacturer
- ☐ Product Line
- ☐ Model number(s) for each item and its components or bookmark a separate list included within section
- ☐ Product Description
- ☐ Overall Dimensions
- ☐ Product Image or bookmark a separate larger or detailed image(s) included within section
- ☐ Proposed Fabric(s) and Finish(es) quoted and/or bookmark finish cards included within section
- ☐ Fabric Grade or bookmark finish cards identifying grade included within section

Tips to Avoid Common Mistakes:

- Use data sheet as technical specification document to verify item requirements are provided. Data sheet should summarize supporting compliance documentation provided for an item; it cannot be accepted as a compliance document.
- Coordinate product information within the submittal and with the Attachment #1 documentation. Inconsistencies with product information listed on the data sheet and product priced (such as dimensions, product line, model numbers, etc.) must be resolved prior to receiving technical acceptance on an item.

Scenario –

Wood Casegoods

4.3 Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Overall Dimensions: 6'-0"W x 6'-6"D

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

Components:

- a. 72"W x 36"D Rectangular desk with overhang
 - i. 30"D Box/Box/File pedestal with pencil tray and drawer dividers for each box drawer
 - ii. Center drawer
 - iii. Full height modesty panel
- b. 42"W x 24"D Rectangular return
 - i. 24"D File/File pedestal
 - ii. Partial height modesty panel
- c. Grommets with covers on all work surfaces
- d. Cable trays and/or clips for wire management below all work surfaces
- e. Locks at all drawers, keyed alike

Finish:

- a. Wood Veneer: Manufacturer's standard selection, shall include cherry or walnut, dark brown stain
- b. Pulls: Manufacturer's standard selection
- c. Fabric: Manufacturer's standard mid-grade fabric selection

Example – Item Number Product Data Sheet

ITEM NUMBER ITEM DESCRIPTION

4.3

D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

MANUFACTURER:

XYZ Furniture Maker

PRODUCT LINE:

Awesome Contemporary Casegoods

MODEL NUMBER(S) including required options:

DS7236; CD1621; PT1409; LKA, WMT; RL4224

PRODUCT DESCRIPTION: Use manufacturer's description in pricing catalog;


72"W X 36"D Single Pedestal Desk with Center Drawer and Box/Box/File; 42"W X 24"D Return with File/File Pedestal

OVERALL DIMENSIONS:

6'-6" X 6'-0"

REFERENCES / NOTES:

Provide a components list and description of what is being provided in Section 3.0 Compliance Documentation

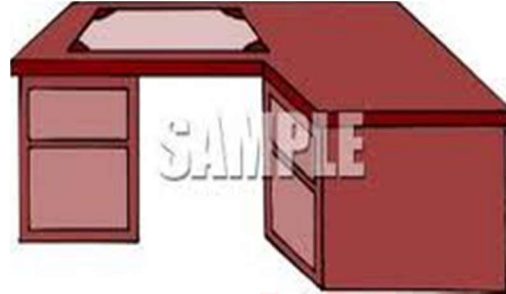

PRODUCT IMAGE

Provide a photo quality graphic or line drawing image of the quoted item

FINISHES/FABRICS PROPOSED: Finish cards may be referenced in lieu of images of finishes.

Finish: Medium Cherry

Pulls: Brushed Nickel

FINISH IMAGE with applicable grade or Bookmark finish selection card in Section 3.0 Compliance

FINISH IMAGE with applicable grade or Bookmark finish selection card in Section 3.0 Compliance

FINISH IMAGE with applicable grade or Bookmark finish selection card in Section 3.0 Compliance

Drawing(s) –Plan Views

Purpose:

The plan drawing provides a visual “top view” depiction of the required item. Plans are reviewed in comparison to the written FID requirements and contract drawings, as well as other documentation and drawings within the vendor’s submittal to ensure the item is accurately quoted to meet FID requirements.

Every FID Item may not require plan or electrical / data drawings, but vendors may provide them to clarify salient features.

What FID Items Require Plan Views?

Plan Views:

Drawings should be provided for the following FID section items, including but not limited to:

- Panel supported work stations
- Metal laminate desks
- Freestanding integrated desking
- Metal furniture, including files, towers, cabinets, and bookcases
- Wood casegoods
- Wood conference tables
- Laminate casegoods
- Laminate tables, including training tables
- Work benches

Plan Views - Electrical / Data:

If electrical /data components are specified, a separate drawing from the plan view shall be provided to detail electrical and data for FID Section items, including but not limited to:

- Panel supported work stations
- Integrated desking systems
- Wood conference tables
- Laminate tables, including training tables
- Work benches

What Information Should Be Noted on Drawings?

Checklist - Plan Views:

- ☐ Item Number
- ☐ Item Description
- ☐ Plan of Overall Cluster
- ☐ Detail Plan of Each Typical
- ☐ Label the required components of each typical, CADD graphic tags may be used to identify required components and dimensions
- ☐ Dimensions overall cluster
- ☐ Dimension overall typical(s)
- ☐ Turn off unnecessary tags to ensure plan is legible
- ☐ Provide electrical / data components on a separate drawing

Checklist - Electrical / Data Plan Views:

- ☐ Item Number
- ☐ Item Description
- ☐ Detail Electrical / Data Plan of each typical in a cluster
- ☐ Label required components of electrical / data components, CADD graphic tags may be used to identify required components and dimensions
- ☐ Indicate location (baseline / beltline) if possible. This may be shown on elevation as well
- ☐ Dimensions overall cluster
- ☐ Dimension overall typical(s)
- ☐ Turn off unnecessary tags to ensure electrical / data notes and locations are legible
- ☐ Provide cluster/typical components on a separate drawing

Tips to Avoid Common Mistakes:

- All tags are left on components and make the drawing cluttered and illegible. Heavy line weights, blurred images, and images that are too small to decipher make plans illegible.
- Combination of electrical / data plans with drawings with the above problems make it almost impossible to determine the locations in a work station.
- Heavy line weights, manufacturer tags, etc, that overlap the electrical data symbols make it difficult for the technical reviewer to find.
- Cluster Drawings and Typical Plan Drawings may be submitted on the same page as long as the graphics and text are legible when enlarged.

FOR INFORMATION ONLY

Scenario –

Panel Supported Workstations

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

TYP-01: Panel Supported Work Station

Individual Work Station Dimensions: 7'-6"W x 5'-0"D

*Dimensions do not include panel thickness

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

*Provide all electrical connections, i.e. base feeds, power poles, and accessory items as needed.

Individual Workstation Components:

- a. 60"W x 30"D Rectangular work surface
- b. 36"W x 18"D Rectangular work surface
- c. 30"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- d. 18"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- e. 60"W Overhead storage bin with flipper doors
 - i. Doors shall open over the case
 - ii. Overhead storage bin shall have dividers or bookends that attach securely to the bin
 - iii. Provide energy efficient task lighting with vertical cord manager and power cord long enough to reach power source
- f. 24"W x 18"D Hybrid storage tower:
 - i. (1) Adjustable shelf with file/file below, one side
 - ii. Full height storage cabinet with coat rod, other side
- g. 64-68"H Segmented, acoustical, tackable panels
 - i. Minimum of 3 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Middle Tile: Tackable acoustical fabric
 - c. Top Tile: Tackable acoustical fabric
- h. 50-54"H Segmented, acoustical, tackable panels
 - i. Minimum of 2 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Top Tile: Tackable acoustical fabric
- i. (5) Duplex receptacles located in the base raceway, beltline (above the work surface), and technology tile
 - i. (3) Duplex outlets shall be located in base raceways
 - ii. (1) Duplex outlet shall be located in beltline (above the work surface)
 - iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) duplex outlet
- j. Duplex receptacles shall be evenly distributed across all work surfaces
- k. (4) Punch outs for data/comm. located in the base raceway, beltline (above the work surface), and technology tile. Refer to provided plans for locations
 - i. (2) Punch outs for data/comm. shall be located in base raceways
 - ii. (1) Punch out for data/comm. shall be located in beltline (above the work surface)

- iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) punch out for (1) data; (1) voice
- l. Slatwall organizer shall include:
 - i. Paper management accessories: (1) pencil cup, (1) diagonal paper sorter
- m. Grommets with covers and/or scallops on all work surfaces
- n. Cable trays and/or clips for wire management below all work surfaces
- o. Locks at all drawers and doors
 - i. Item shall be keyed to match adjacent furnishings within the workstation
- p. All work surfaces shall be laminate. Storage cases and supports shall be metal

Finish:

- a. High Pressure Laminate: Manufacturer's standard selection
- b. Edge: Manufacturer's standard selection
- c. Metal: Manufacturer's standard powder coat paint selection
- d. Pulls: Manufacturer's standard selection
- e. Panel Fabric: Manufacturer's standard mid-grade fabric selection
- f. Top Cap and Trim: Manufacturer's standard metal selection

TYP-02: Panel Supported Work Station

Individual Work Station Dimensions: 5'-6"W x 5'-0"D

*Dimensions do not include panel thickness

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

*Provide all electrical connections, i.e. base feeds, power poles, and accessory items as needed.

Individual Workstation Components:

- a. 60"W x 30"D Rectangular work surface
- b. 36"W x 18"D Rectangular work surface
- c. 30"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- d. 18"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- e. 60"W Overhead storage bin with flipper doors
 - i. Doors shall open over the case
 - ii. Overhead storage bin shall have dividers or bookends that attach securely to the bin
 - iii. Provide energy efficient task lighting with vertical cord manager and power cord long enough to reach power source
- f. 64-68"H Segmented, acoustical, tackable panels
 - i. Minimum of 3 tackable tiles
- g. (2) Duplex receptacles located in the base raceway and technology tile
 - i. (1) Duplex outlet shall be located in base raceways
 - ii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) duplex outlet
- h. Duplex receptacles shall be evenly distributed
- i. (2) Punch outs for data/comm. located in the base raceway and technology tile. Refer to provided plans for locations
 - i. (1) Punch outs for data/comm. shall be located in base raceways
 - ii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) punch out for (1) data; (1) voice
- j. 12-16"H Privacy screen shall attach securely to the worksurface, see cluster descriptions for locations
- k. Slatwall organizer shall include:
 - i. Paper management accessories: (1) pencil cup, (1) diagonal paper sorter
- l. Grommets with covers and/or scallops on all work surfaces

- m. Cable trays and/or clips for wire management below all work surfaces
- n. Locks at all drawers and doors
 - i. Item shall be keyed to match adjacent furnishings within the workstation
- o. All work surfaces shall be laminate. Storage cases and supports shall be metal

Finish:

- a. High Pressure Laminate: Manufacturer's standard selection
- b. Edge: Manufacturer's standard selection
- c. Metal: Manufacturer's standard powder coat paint selection
- d. Pulls: Manufacturer's standard selection
- e. Panel Fabric: Manufacturer's standard mid-grade fabric selection
- f. Privacy screen: Manufacturer's standard selection shall include a frosted finish
- g. Top Cap and Trim: Manufacturer's standard metal selection

2.1 Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Overall Dimensions: 15'-6"W x 15'-3"D


*Coordinate layout with existing windows, wall-mounted data boxes, fire extinguishers, thermostats, radiators etc., as applicable.

Cluster Components:

- a. (2) TYP-01, (4) TYP-02; refer to TYP-01 and TYP-02 for specific requirements
- b. Privacy screens shall be a nominal dimension of 66"W and be located between workstation typicals
- c. Refer to provided floor plans for cluster layout and shared panel configurations

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6


Item No. CL-4: Panel Supported Work Stations, Cluster of 6

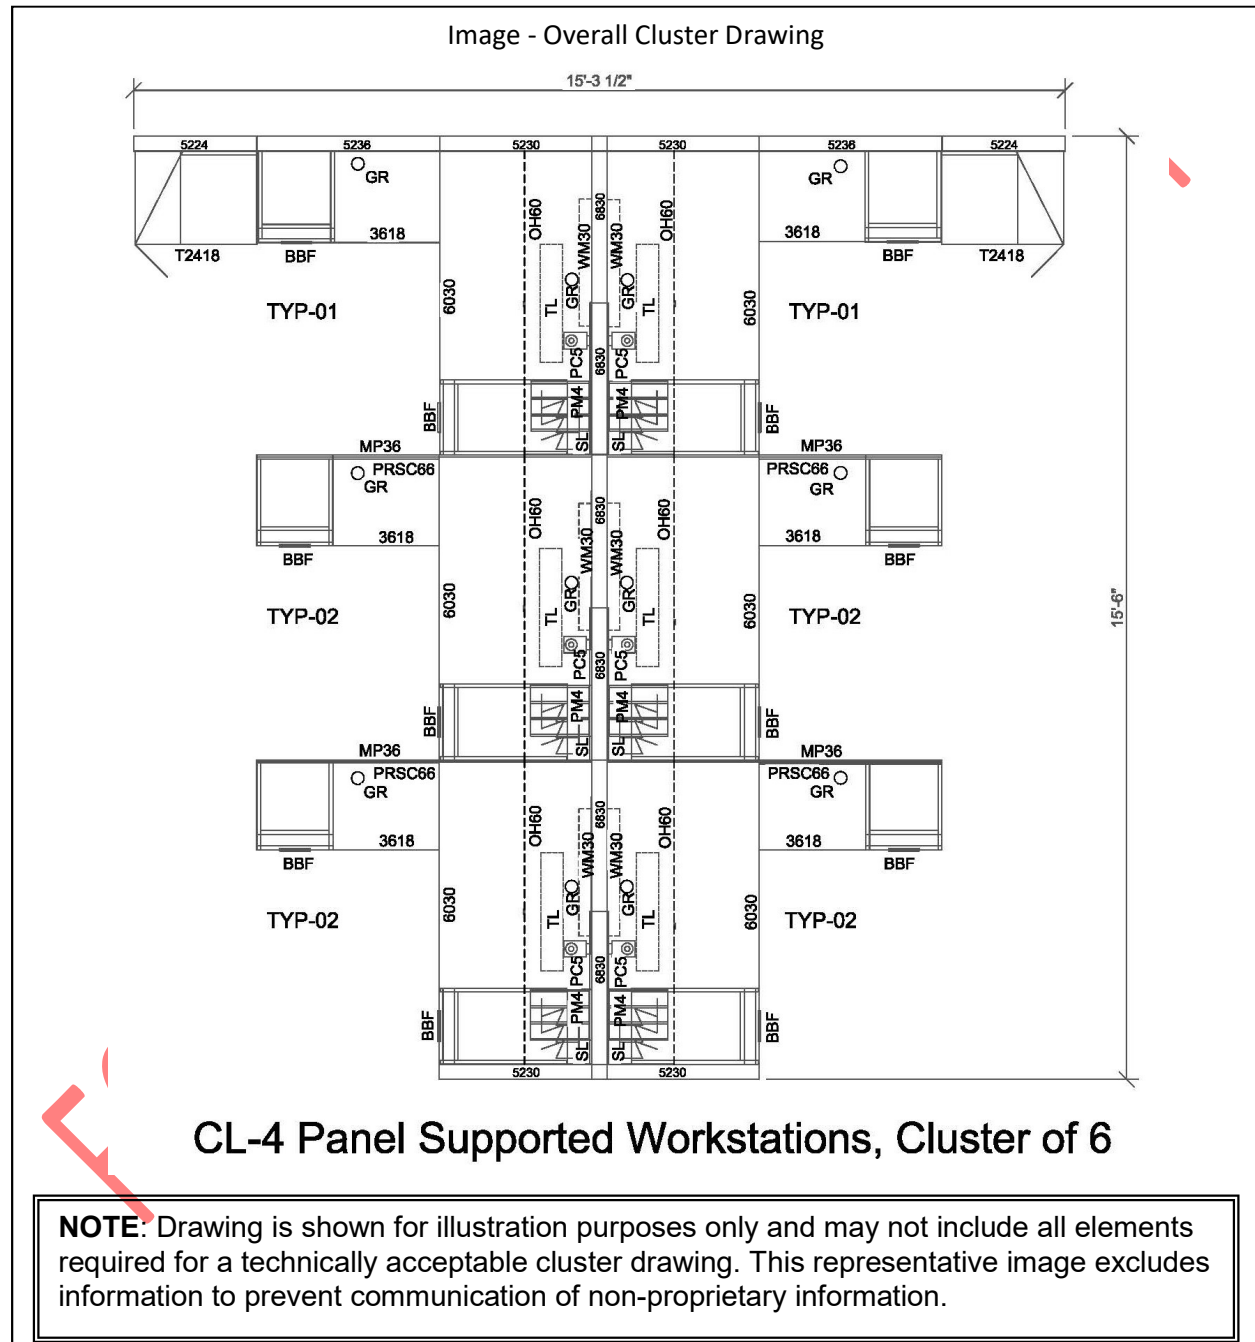

Example – Typical Plan View: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Image – Typical Plan Drawing

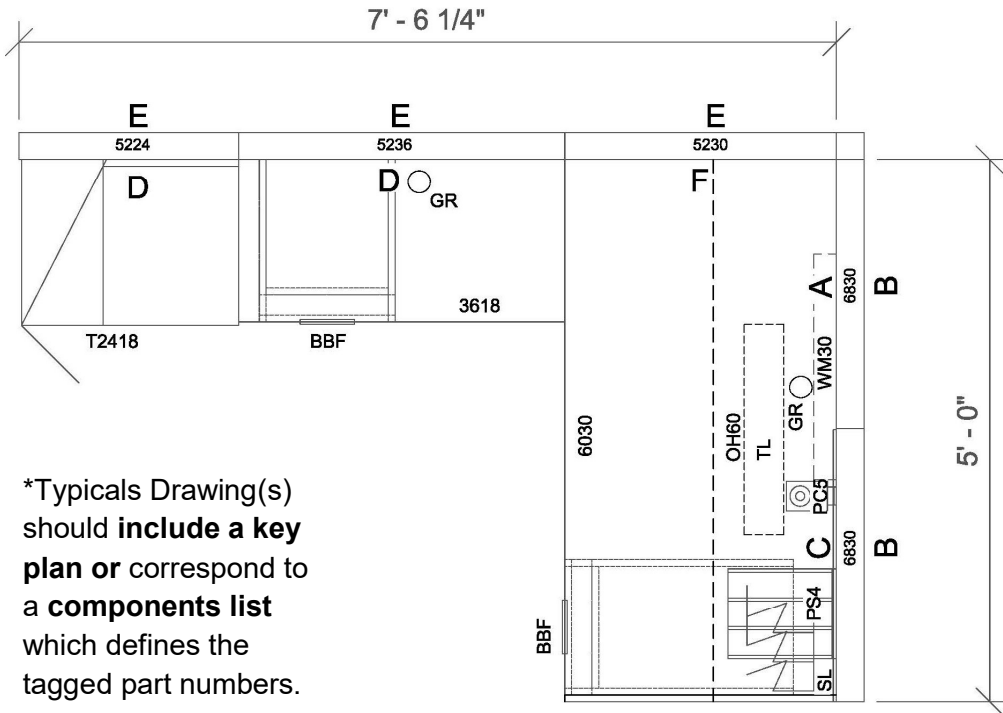

TYP-01 Panel Supported Workstation

NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable typical drawing. This representative image excludes information to prevent communication of non-proprietary information.

Examples – Typical Electrical / Data View: (Example of what the vendor shall provide)


ITEM **ITEM DESCRIPTION**

NUMBER

2.1 Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Image – Typical Electrical / Data Drawing

Key	
	Duplex Receptacle in Base Raceway
	Data/Comm. in Base Raceway
	Duplex Receptacle in Tech. Tile
	Data/Comm. in Tech. Tile
	Duplex Receptacle in Beltline
	Data/Comm. in Beltline

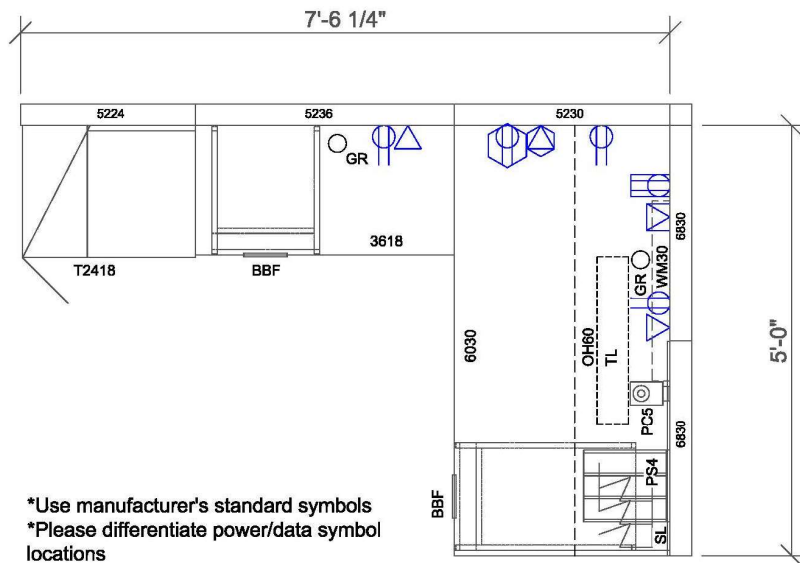

*Use manufacturer's standard symbols
*Please differentiate power/data symbol locations

Electric Plan for TYP-01 Panel Supported Workstation

NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable electrical / data typical drawing. This representative image excludes information to prevent communication of non-proprietary information.

Drawing(s) – Elevation View - Segmented Panel Detail(s)

Purpose:

Elevational views depict a vertical view of the panel and tile locations. Reviewed in comparison to written FID requirements, contract drawings, as well as other documentation and drawings within the vendor's submittal, to ensure item is accurately quoted to meet all the FID requirements.

What FID Items Require Elevation Views?

Drawings shall be provided to clarify components located on the vertical plane for the following the FID Section items:

- Panel supported work stations

What Information Should Be Noted on Elevations?

Checklist - Elevation Views – Segmented Panel Details:

- ☐ Item Number
- ☐ Item Description
- ☐ Segmented Panel Details of each side of each typical in cluster
- ☐ Details show location of components, such as tile locations, alignment of panel frames, power/data locations at all raceways
- ☐ Provide details as a separate drawing(s). These drawings may be submitted on the same page with other drawings as long as the graphics and text are legible
- ☐ Include labels or key notes to indicate required vertical components of typical/cluster. CADD graphic tags may be used identified required components
- ☐ Turn off unnecessary tags to ensure plan is legible

Tips to Avoid Common Mistakes:

- Tags are left on components and make the drawing cluttered and illegible. Heavy line weights, blurred images, and images that are too small to decipher.
- Heavy line weights, manufacturer tags, etc, that overlap the electrical data symbols.
- Details are not submitted in technical response.

Scenario - Panel Supported Workstations

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Excerpt from Plan View Scenario (TYP-01: Panel Supported Work Stations):


- a. 64-68"H Segmented, acoustical, tackable panels
 - i. Minimum of 3 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Middle Tile: Tackable acoustical fabric
 - c. Top Tile: Tackable acoustical fabric
- b. 50-54"H Segmented, acoustical, tackable panels
 - i. Minimum of 2 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Top Tile: Tackable acoustical fabric
- c. (5) Duplex receptacles located in the base raceway, beltline (above the work surface), and technology tile
 - i. (3) Duplex outlets shall be located in base raceways
 - ii. (1) Duplex outlet shall be located in beltline (above the work surface)
 - iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) duplex outlet
- d. Duplex receptacles shall be evenly distributed across all work surfaces
- e. (4) Punch outs for data/comm. located in the base raceway, beltline (above the work surface), and technology tile. Refer to provided plans for locations
 - i. (2) Punch outs for data/comm. shall be located in base raceways
 - ii. (1) Punch out for data/comm. shall be located in beltline (above the work surface)
 - iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) punch out for (1) data; (1) voice

Example – Segmented Panel Detail – Typical(s): (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Image – Segmented Panel Detail – Typical(s)

**Segmented Panel Detail(s) for TYP-01
Panel Supported Workstation**

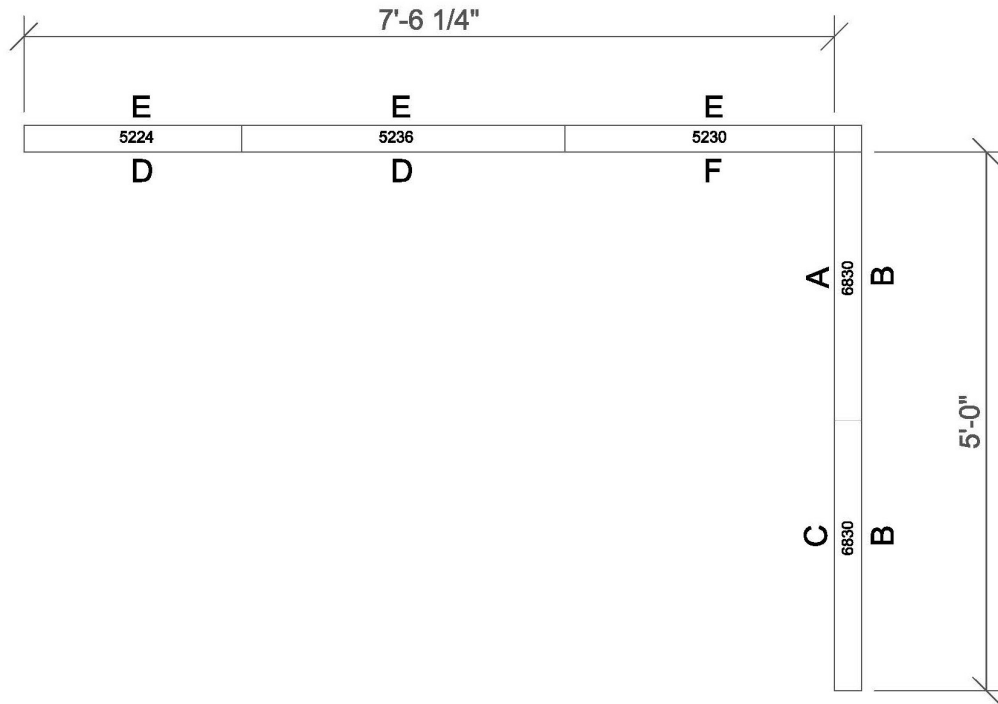


NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable detail drawing. This representative image excludes information to prevent communication of non-proprietary information.

FOR INFORMATION ONLY

Example – Elevation View - Segmented Panel Detail – Typical(s): (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

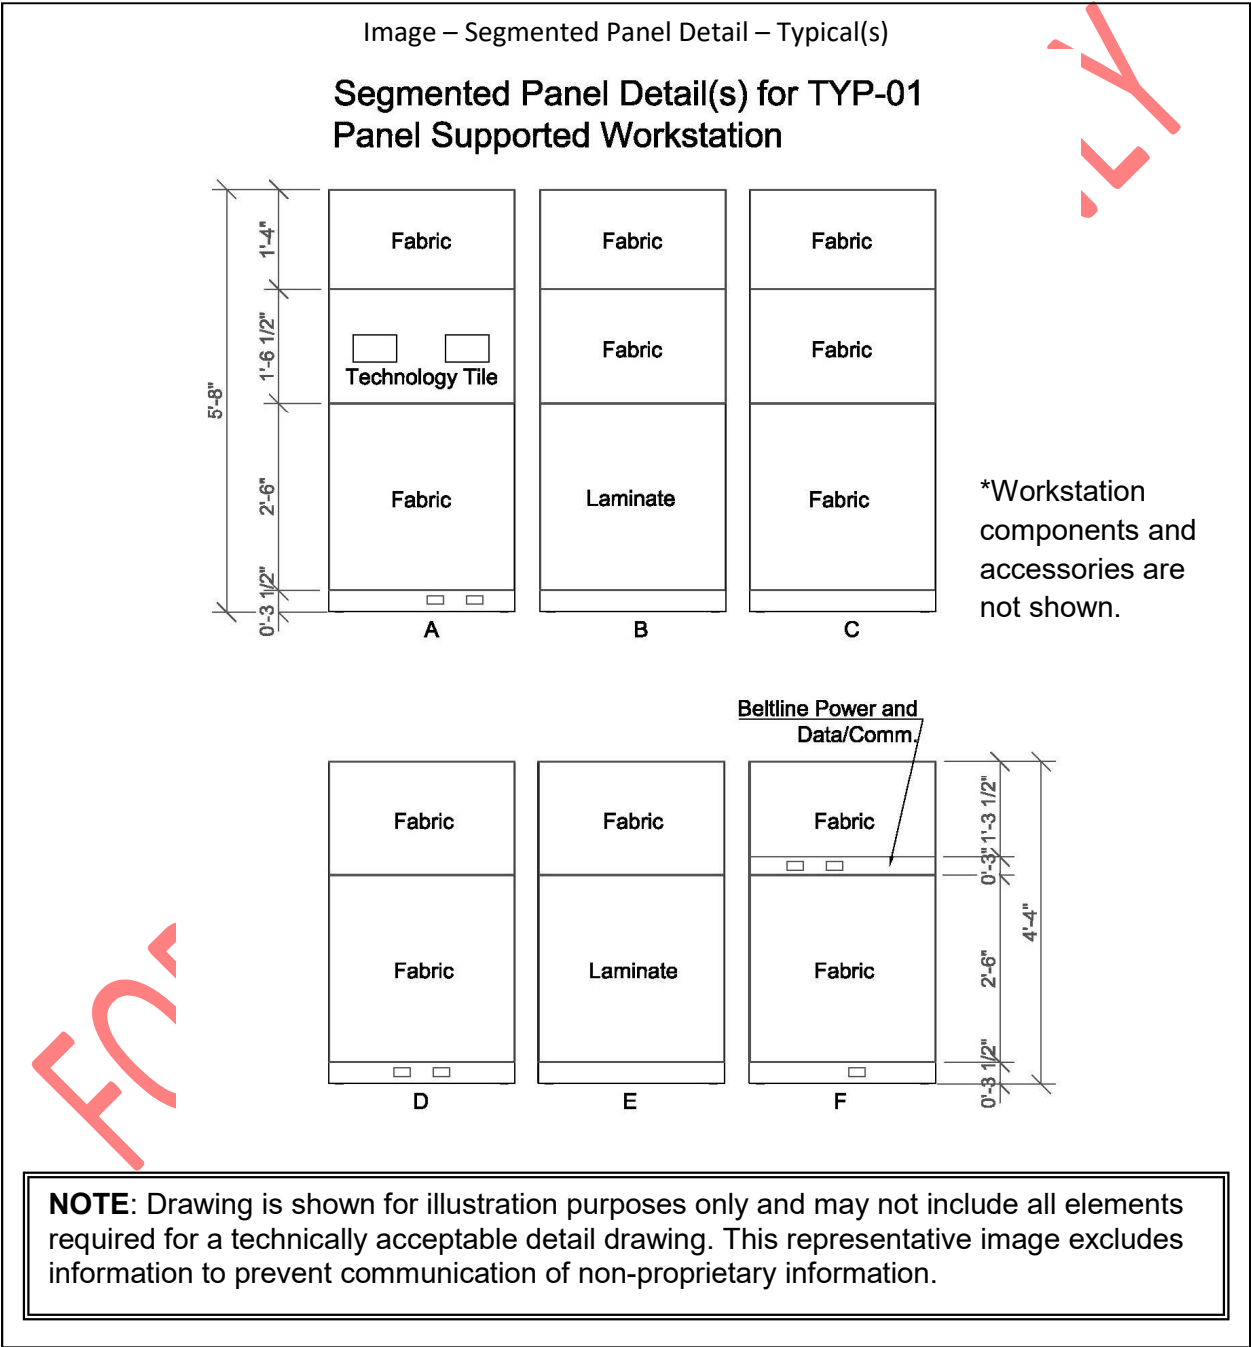

FOR INFORMATION ONLY

Drawing(s) - Isometric Views

Purpose:

Isometric drawing provides a visual “3-D” depiction of required item and are reviewed in comparison to the written FID requirements, contract drawings, as well as other documentation and drawings within vendor’s submittal, to ensure item is accurately quoted to meet all FID requirements.

Every FID Item does not require isometric drawing(s) but may be provided to clarify vertical locations of components of item.

What FID Items Require Isometric Views?

Drawings shall be provided for the following FID Section items:

- Panel supported work stations
- Metal laminate desks
- Metal furniture, including files, towers, cabinets, and bookcases
- Wood casegoods
- Laminate casegoods
- Laminate training tables, if powered
- Seating, if detailed photograph image is not available
- Workbenches or technical workstations

What Information Should Be Noted on Isometric Views?

Checklist – Isometric Views, includes Electrical / Data:

- ☐ Item Number
- ☐ Item Description
- ☐ Detail Isometric of overall workstation cluster
- ☐ Detail Isometric of each typical in cluster
- ☐ Detail Exterior and Interior Views locating vertical locations of components, such as alignment of panel frames, electrical/data locations at beltline and base raceways; multiple views as required
- ☐ Provide an isometric view as a separate drawing. These drawings may be submitted on the same page with other drawings as long as the graphics and text are legible
- ☐ Include labels or key notes to indicate required vertical components of typical/cluster. CADD graphic tags may be used identified required components
- ☐ Turn off unnecessary tags to ensure plan is legible

Tips to Avoid Common Mistakes:

- Isometrics of Interior/Exterior views are not included.
- Components are included in all isometrics.
- Unnecessary tags are left on components making drawing cluttered and illegible. Heavy line weights, blurred images, and images that are too small to decipher.
- Cluster Drawings and Typical Plan Drawings may be submitted on the same page as long as graphics and text are legible when enlarged.
- All FID Items do not require a drawing but may be provided to communicate salient features of item.

Scenario - Panel Supported Workstations

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

TYP-01: Panel Supported Work Station

Individual Work Station Dimensions: 7'-6"W x 5'-0"D

*Dimensions do not include panel thickness

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

*Provide all electrical connections, i.e. base feeds, power poles, and accessory items as needed.

Individual Workstation Components:

- a. 60"W x 30"D Rectangular work surface
- b. 36"W x 18"D Rectangular work surface
- c. 30"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- d. 18"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- e. 60"W Overhead storage bin with flipper doors
 - i. Doors shall open over the case
 - ii. Overhead storage bin shall have dividers or bookends that attach securely to the bin
 - iii. Provide energy efficient task lighting with vertical cord manager and power cord long enough to reach power source
- f. 24"W x 18"D Hybrid storage tower:
 - i. (1) Adjustable shelf with file/file below, one side
 - ii. Full height storage cabinet with coat rod, other side
- g. 64-68"H Segmented, acoustical, tackable panels
 - i. Minimum of 3 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Middle Tile: Tackable acoustical fabric
 - c. Top Tile: Tackable acoustical fabric
- h. 50-54"H Segmented, acoustical, tackable panels
 - i. Minimum of 2 tackable tiles
 - ii. Interior Tiles: All segments shall be tackable acoustical fabric
 - iii. Exterior tiles:
 - a. Bottom tile: Laminate
 - b. Top Tile: Tackable acoustical fabric
- i. (5) Duplex receptacles located in the base raceway, beltline (above the work surface), and technology tile
 - i. (3) Duplex outlets shall be located in base raceways
 - ii. (1) Duplex outlet shall be located in beltline (above the work surface)
 - iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) duplex outlet
- j. Duplex receptacles shall be evenly distributed across all work surfaces
- k. (4) Punch outs for data/comm. located in the base raceway, beltline (above the work surface), and technology tile. Refer to provided plans for locations
 - i. (2) Punch outs for data/comm. shall be located in base raceways
 - ii. (1) Punch out for data/comm. shall be located in beltline (above the work surface)
 - iii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) punch out for (1) data; (1) voice
- l. Slatwall organizer shall include:

- i. Paper management accessories: (1) pencil cup, (1) diagonal paper sorter
- m. Grommets with covers and/or scallops on all work surfaces
- n. Cable trays and/or clips for wire management below all work surfaces
- o. Locks at all drawers and doors
 - i. Item shall be keyed to match adjacent furnishings within the workstation
- p. All work surfaces shall be laminate. Storage cases and supports shall be metal

Finish:

- a. High Pressure Laminate: Manufacturer's standard selection
- b. Edge: Manufacturer's standard selection
- c. Metal: Manufacturer's standard powder coat paint selection
- d. Pulls: Manufacturer's standard selection
- e. Panel Fabric: Manufacturer's standard mid-grade fabric selection
- f. Top Cap and Trim: Manufacturer's standard metal selection

TYP-02: Panel Supported Work Station

Individual Work Station Dimensions: 5'-6"W x 5'-0"D

*Dimensions do not include panel thickness

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

*Provide all electrical connections, i.e. base feeds, power poles, and accessory items as needed.

Individual Workstation Components:

- a. 60"W x 30"D Rectangular work surface
- b. 36"W x 18"D Rectangular work surface
- c. 30"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- d. 18"D Box/Box/File pedestal with (1) pencil tray and (2) drawer dividers for each box drawer
- e. 60"W Overhead storage bin with flipper doors
 - i. Doors shall open over the case
 - ii. Overhead storage bin shall have dividers or bookends that attach securely to the bin
 - iii. Provide energy efficient task lighting with vertical cord manager and power cord long enough to reach power source
- f. 64-68"H Segmented, acoustical, tackable panels
 - i. Minimum of 3 tackable tiles
- g. (2) Duplex receptacles located in the base raceway and technology tile
 - i. (1) Duplex outlet shall be located in base raceways
 - ii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) duplex outlet
- h. Duplex receptacles shall be evenly distributed
- i. (2) Punch outs for data/comm. located in the base raceway and technology tile. Refer to provided plans for locations
 - i. (1) Punch outs for data/comm. shall be located in base raceways
 - ii. (1) Technology tile shall include the following: (2) locations for cutouts each shall include; (1) punch out for (1) data; (1) voice
- j. 12-16"H Privacy screen shall attach securely to the worksurface, see cluster descriptions for locations
- k. Slatwall organizer shall include:
 - i. Paper management accessories: (1) pencil cup, (1) diagonal paper sorter
- l. Grommets with covers and/or scallops on all work surfaces
- m. Cable trays and/or clips for wire management below all work surfaces
- n. Locks at all drawers and doors
 - i. Item shall be keyed to match adjacent furnishings within the workstation

- o. All work surfaces shall be laminate. Storage cases and supports shall be metal

Finish:

- a. High Pressure Laminate: Manufacturer's standard selection
- b. Edge: Manufacturer's standard selection
- c. Metal: Manufacturer's standard powder coat paint selection
- d. Pulls: Manufacturer's standard selection
- e. Panel Fabric: Manufacturer's standard mid-grade fabric selection
- f. Privacy screen: Manufacturer's standard selection shall include a frosted finish
- g. Top Cap and Trim: Manufacturer's standard metal selection

2.1 Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Overall Dimensions: 15'-6"W x 15'-3"D

*Coordinate layout with existing windows, wall-mounted data boxes, fire extinguishers, thermostats, radiators etc., as applicable.

Cluster Components:


- a. (2) TYP-01, (4) TYP-02; refer to TYP-01 and TYP-02 for specific requirements
- b. Privacy screens shall be a nominal dimension of 66"W and be located between workstation typical
- c. Refer to provided floor plans for cluster layout and shared panel configurations

FOR INFORMATION ONLY

Example - Isometric View – Overall Cluster: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Image –Isometric View – Overall Cluster

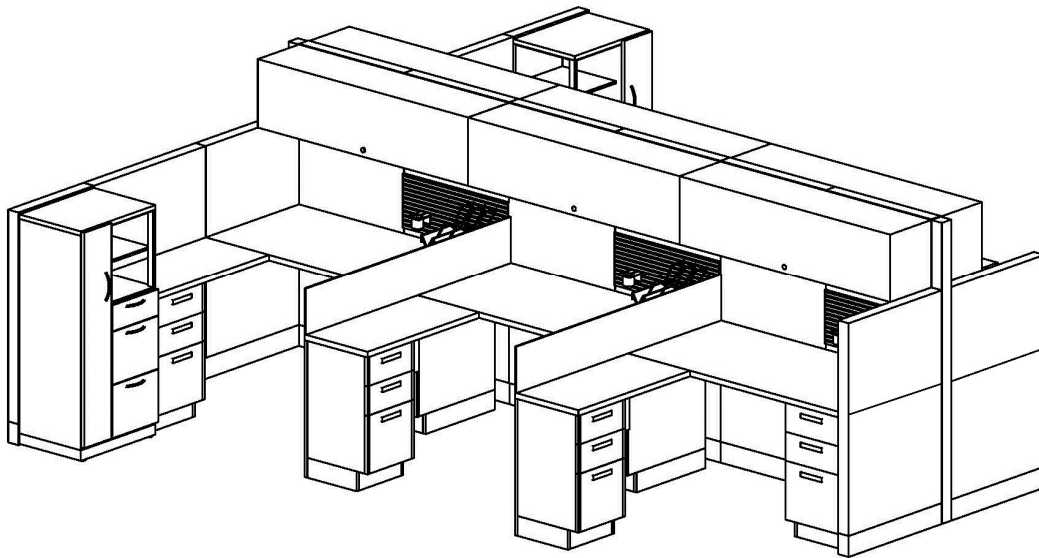

NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable isometric cluster drawing. This representative image excludes information to prevent communication of non-proprietary information.

FOR INFORMATION ONLY

Example - Isometric View – Typical(s): (Example of what the vendor shall provide)

ITEM


ITEM DESCRIPTION

NUMBER

2.1

Item No. CL-4: Panel Supported Work Stations, Cluster of 6


Image – Isometric View – Typical(s)

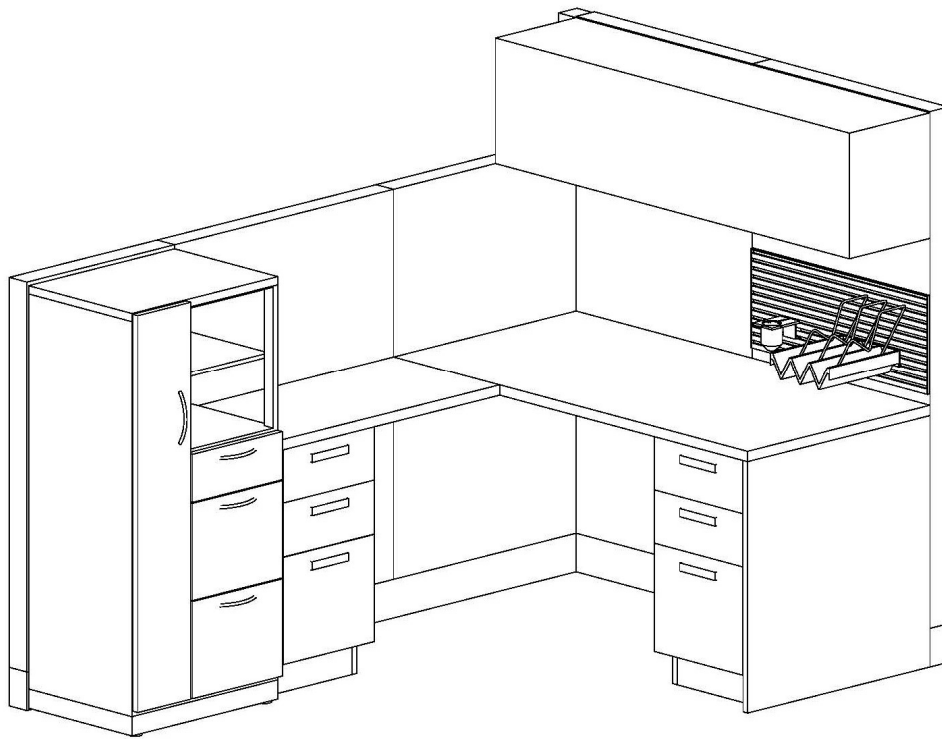

NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable isometric typical drawing. This representative image excludes information to prevent communication of non-proprietary information.

Example - Isometric View – Interior: (Example of what the vendor shall provide)


ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

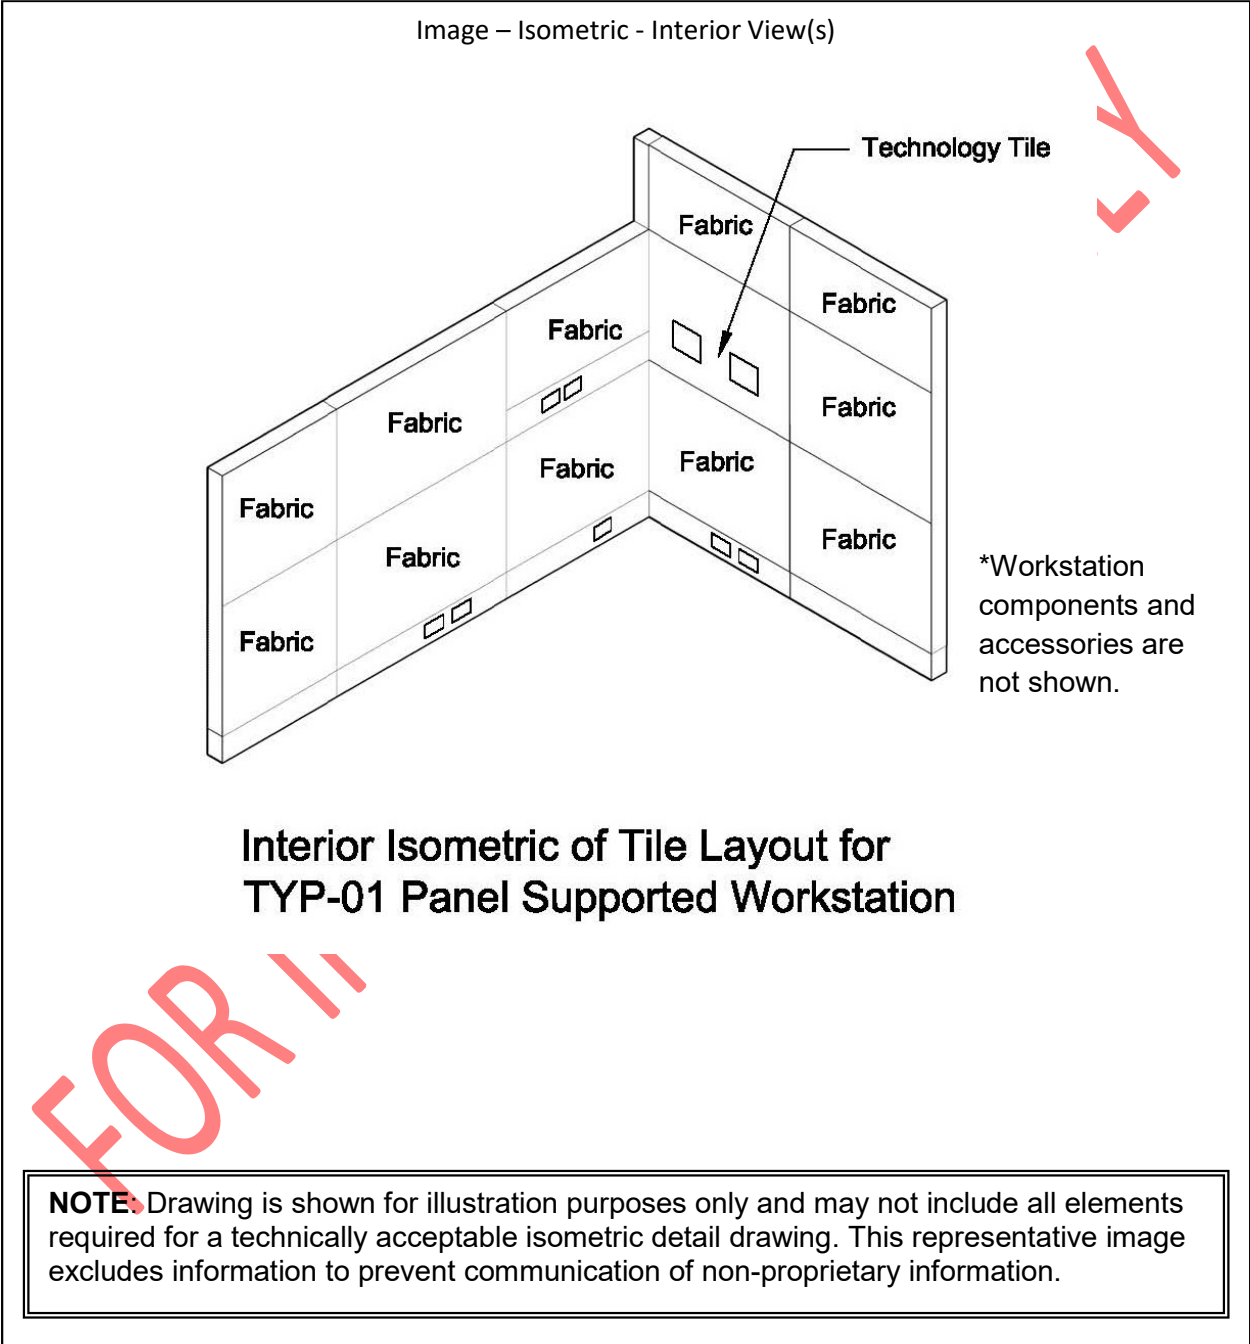

Examples – Isometric Views – Exterior: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
2.1	Item No. CL-4: Panel Supported Work Stations, Cluster of 6

Image – Isometric - Exterior View(s)

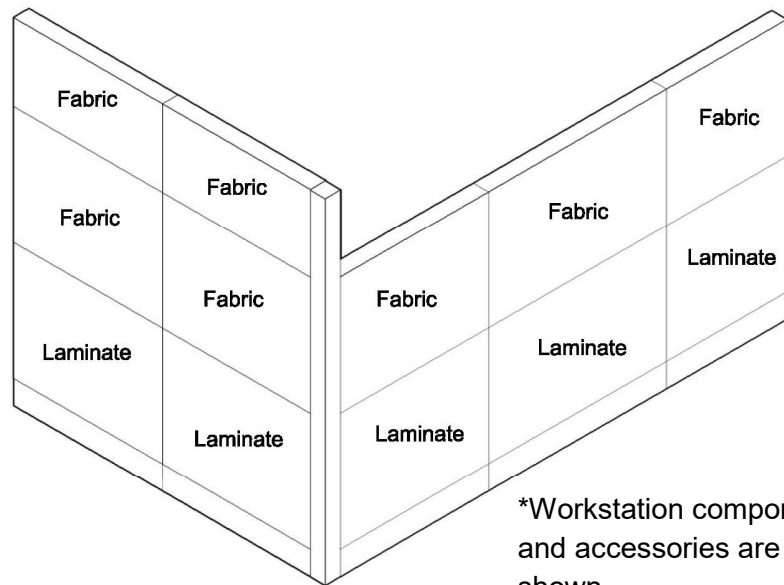

*Workstation components and accessories are not shown.

Exterior Isometric of Tile Layout for TYP-01 Panel Supported Workstation

NOTE: Drawing is shown for illustration purposes only and may not include all elements required for a technically acceptable isometric detail drawing. This representative image excludes information to prevent communication of non-proprietary information.

FOR INFORMATION ONLY

FID Line Item Compliance Documentation

Purpose:

Provide published documents that identifies the existence of and confirms required salient features of items in the manufacturer's quoted price.

What FID Items Require Compliance Documentation?

All line items listed in the FID require manufacturer's documentation to confirm the components and salient features of the item are provided.

What Information Should Be Included for FID line item Compliance Documentation?

Verifiable documentation should be provided for each item and consists of a manufacturer's product information as published on the manufacturer's website and/or in printed media customarily distributed to the A/E design industry.

Product information includes, but is not limited to, product pricing pages, specification guides/sheets, cut sheets, brochures, and provides all information to verify the construction, salient features, dimensions, model numbers, and model options for the item required in FID line item documentation.

Checklist –FID Line Item Compliance Documentation:

- ☐ Annotated Item Number(s)
- ☐ Manufacturer's product information as described above with quoted model numbers and features annotated and/or highlighted.
- ☐ Annotation Notes and/or Highlights shall identify required salient features, specific model numbers, quoted options, dimensions, and any dimensional ranges.
- ☐ Fabric/Finish Selection Cards, if not provided on Item Number Product Data Sheet.
- ☐ Bookmark or key annotations / notes specific to an item number, if multiple items are referenced.
- ☐ Drawings are keyed to parts or components list.

Tips to Avoid Common Mistakes:

- To reduce the size of the submittal and streamline documentation, vendors may provide one annotated document that satisfies requirements for multiple FID Section Line Item Numbers. The document shall have notes and/or annotations to distinguish all applicable item numbers.
- Non-verifiable documentation cannot be accepted
- Highlighting helps locate the required information.
- Do not provide only a brochure as FID Compliance documentation. Brochures do not typically provide a complete representation of an item.
- Documentation is provided but is not annotated or highlighted.
- Quoted product information must match information entered in the Attachment 1
- **Do not copy FID Line item description in lieu of providing documentation.**
- Never create a document for the quote submittal to be presented as technical specification information. Documentation created for the sole purpose of responding to submittal requirements cannot be verified.
- Avoid submitting documents not labeled with the item(s) they support.
- Avoid submitting documents that do not visually indicate, with notes or annotations, the specific component, finish, part, etc., priced from among the many choices presented in the pricer, statement of line, or other published documentation.

- Avoid stating “See BOM” on Attachment 1 instead of providing model numbers, without including model numbers from the BOM or the entire BOM.
- Avoid submitting a BOM for an item but not including spec sheets, drawings, and published documents showing specific items being quoted.
- Avoid omitting technical documents showing what individual components, such as risers and the number and height of drawers, will be provided.
- Avoid submitting an entire pricing catalog without any annotations, bookmarks or highlights identifying what product is being quoted.

Scenario – Wood Casegoods

ITEM NUMBER	ITEM DESCRIPTION
9.1	Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

9.1 Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Overall Dimensions: 6'-0"W x 6'-6"D

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

Components:

- a. 72"W x 36"D Rectangular desk with overhang
 - i. 30"D Box/Box/File pedestal with pencil tray and drawer dividers for each box drawer
 - ii. Center drawer
 - iii. Full height modesty panel
- b. 42"W x 24"D Rectangular return
 - i. 24"D File/File pedestal
 - ii. Partial height modesty panel
- c. Grommets with covers on all work surfaces
- d. Cable trays and/or clips for wire management below all work surfaces
- e. Locks at all drawers, keyed alike

Finish:

- a. Wood Veneer: Manufacturer's standard selection, to include cherry or walnut, dark brown stain
- b. Pulls: Manufacturer's standard selection
- c. Fabric: Manufacturer's standard mid-grade fabric selection

Example – Compliance Documentation - Catalog Sheet: (Example of what the vendor shall provide)

ITEM NUMBER

ITEM DESCRIPTION

9.1

Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Single Pedestal Desks	Dimensions	Model Number
PRODUCT IMAGE	72 x 36 x 29 6" overhang - Full modesty 30" B/B/F	DS7236
PRODUCT IMAGE	66 x 30 x 29 6" overhang - Full modesty 24" B/B/F	DS6630
PRODUCT IMAGE	60 x 30 x 29 6" overhang - Full modesty 24" B/B/F	DS6030
Standard Features: (2) Grommets - Drawer divider for each box drawer - Locks keyed randomly		Options: - CD1621 Center Drawer - PT1409 Pencil Tray - LKA Locks Keyed Alike - WMT Wire Management Tray
Finishes: Natural Cherry, Light Cherry, Medium Cherry, Dark Cherry, Medium Walnut, Dark Walnut, Natural Maple and Light Maple,		
Pulls: Brushed Nickel or Black		

NOTE: The above example is shown for illustration purposes only and may not include all elements required for technical acceptance. This representative image excludes information to prevent communication of non-propietary information. This document is demonstrating example of acceptable highlighting of a catalog sheet.

FOR INFORMATION ONLY

Example – Compliance Documentation – Catalog Sheet, Cont'd.: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
9.1	Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Single Pedestal Returns	Dimensions	Model Number
PRODUCT IMAGE	60 x 24 x 29 - Partial modesty 24" F/F	RL6024
PRODUCT IMAGE	48 x 24 x 29 - Partial modesty 24" F/F	RL4824
PRODUCT IMAGE	42 x 24 x 29 - Partial modesty 24" F/F	RL4224
Standard Features: (2) Grommets - Drawer divider for each box drawer - Locks keyed randomly		Options: - LKA Locks Keyed Alike - WMT Wire Management Tray
Finishes: Natural Cherry, Light Cherry, Medium Cherry, Dark Cherry, Medium Walnut, Dark Walnut, Natural Maple and Light Maple,		
Pulls: Brushed Nickel or Black		

NOTE: The above example is shown for illustration purposes only and may not include all elements required for technical acceptance. This representative image excludes information to prevent communication of non-proprietary information. This document is demonstrating example of acceptable highlighting of a catalog sheet.

FOR INFORMATION ONLY

Example – Compliance Documentation – Components List: (Example of what the vendor shall provide)

**ITEM
NUMBER**

ITEM DESCRIPTION

9.1 Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Item	Mfg	Product Line	Model Number	Qty	Description	Cost	Total Cost
1	XYZ Furniture Maker	Awesome Contemporary Casegoods	DS7236	1	72"W x 36"D Single Pedestal Desk	\$500	\$500
					30" Box/ Box/ File		
					Full height modesty panel		
2		*Finishes:	CD1621	1	Center Drawer	\$50	\$50
3		*Veneer: Medium Cherry	PT1409	1	Pencil Tray	\$15	\$15
4		*Pulls: Brushed Nickel	LKA		Locks Keyed Alike	\$30	\$30
5			WMT	2	Wire Management Tray	\$10	\$20
6	XYZ Furniture Maker	Awesome Contemporary Casegoods	RL4224	1	42"W x 24"D Single Pedestal Return	\$425	\$425
					24" File/File		
					Partial height modesty panel		
7		*Finishes:	LKA		Locks Keyed Alike	\$30	\$30
8		*Veneer: Medium Cherry	WMT	2	Wire Management Tray	\$10	\$20
		*Pulls: Brushed Nickel					
					Total		\$1,070

NOTE: The above example is shown for illustration purposes only and may not include all elements required for a technical acceptance. This representative image excludes information to prevent communication of non-proprietary information.

Construction and Quality Requirements Documentation

Purpose:

Provide published documentation that identifies and confirms the required construction and technical specifications that are included in a manufacturer's quoted price.

What FID Items Require Construction and Quality Compliance Documentation?

All items listed in FID section require manufacturer's documentation to confirm the construction and technical specifications of the item are provided.

Ancillary items are excluded, such as:

- Industrial shelving, work benches and mail room equipment
- Appliances
- Keyboard Platforms
- Waste / Recycling Containers
- Visual Communication Products

What Information Should Be Included for Compliance Documentation?

Verifiable documentation should be provided and is a manufacturer's product information as published on the manufacturer's website and/or in printed media customarily accessible by the A/E design industry.

Construction and quality compliance information includes, but is not limited to:

- specification guides/sheets
- engineering specifications
- product pricing pages and cut sheets
- brochures which provide all information necessary to verify the construction details
- Construction quality and technical specifications of furniture components as required in the FID's compliance section for the items described in FID description sections.

It is acknowledged the manufacturer's proprietary technical documentation, such as engineering specifications, may not be formatted in the same manner or be customarily accessible by the A/E design industry. If proprietary documentation is submitted to address FID's compliance section, the manufacturer should identify it as such. All response documentation, proprietary or non-proprietary, presented to confirm FID requirements within a submittal is treated as confidential.

Non-verifiable documentation cannot be accepted.

Checklist – For Construction and Quality Compliance Documentation:

- ☐ Annotated Item Number(s)
- ☐ Manufacturer's product information as described above with quoted model numbers and features annotated and/or highlighted.
- ☐ Annotation Notes and/or Highlights shall identify required number of technical specifications and construction for the item number quoted
- ☐ Bookmark or key annotations / notes specific to an item number, if multiple items are referenced

Tips to Avoid Common Mistakes:

- To reduce the size of the submittal and streamline documentation, a vendor may provide one annotated document that satisfies the requirement for specific FID items numbers with common construction and specifications. The document should have notes and/or annotations to indicate all applicable item numbers.
- Do not copy the FID construction and quality requirements description in lieu of providing documentation.
- Do not create a document for the quote submittal to be presented as technical specification information. It is not verifiable.
- Avoid submitting documents not labeled with the item(s) they support.
- Avoid submitting documents that do not visually indicate, with notes or annotations, the specific component, finish, part, etc., priced from among the many choices presented in the pricer, statement of line, or other published documentation.
- Construction or veneer specifications are not typically provided in a published format.

Scenario – Wood Casegoods

ITEM NUMBER	ITEM DESCRIPTION
9.1	Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

9.1 Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Overall Dimensions: 6'-0"W x 6'-6"D

Contractor shall:

*Confirm handedness in field.

*Coordinate layout with existing windows, wall-mounted data boxes, etc., as applicable.

Components:

- a. 72"W x 36"D Rectangular desk with overhang
 - i. Full height modesty panel
 - ii. 30"D Box/Box/File pedestal with pencil tray and drawer dividers for each box drawer
 - iii. Center drawer
- b. 42"W x 24"D Rectangular return
 - i. Partial height modesty panel
 - ii. 24"D File/File pedestal
- c. Grommets with covers on all work surfaces
- d. Cable trays and/or clips for wire management below all work surfaces
- e. Locks at all drawers and doors, keyed alike
 - i. Item shall be keyed to match adjacent furnishings within the same [room, space, area]
This is to prevent all offices from having the same locks/keys so anyone can open the files in the office next door.

Finish:

- a. Wood Veneer: Cherry; Manufacturer's standard selection, to include medium cherry stain
- b. Pulls: Manufacturer's standard selection shall include a brushed nickel

Sample of Construction and Quality Compliance Documentation for Drawers:

1. Drawer fronts shall be solid wood or a veneered panel. Veneered drawer fronts shall be completely finished on all edges, and edges shall have the same final top coat as the desk.
2. Drawers shall be 5-sided with a separate, removable front for field replacement without disturbing the contents of the drawer.

3. Drawer sides and backs shall be a minimum ½" thick particleboard with veneer faces assembled with dowels. Variance from the thickness requirement for file drawer sides shall only be permitted when the metal file rails attached to the top drawer edge require the dimension to be less. In no instance shall the thickness of the drawer side be reduced to less than ⅜".
4. Drawer bottoms shall be a 3-ply construction of particleboard, medium density fiberboard, or similar engineered wood core, with a veneer or melamine face and a backer sheet on the underside of the panel. Drawer bottom shall be let into all sides of the drawer with a rabbet joint, glued, and stapled.
5. File drawers shall have full extension ball bearing slides with a dampened start/stop feature and a positive stop.
6. Box drawers shall have the same slides as file drawers, except that the suspension must allow access to a minimum ¾ of the drawer's depth.
7. Box drawers shall have a divider.
8. File drawers shall have full height sides with metal file rails for front-to-back and side-to-side filing.
9. File drawers and hanging systems shall support hanging file folders without the folders binding or falling through and shall allow the drawer to close with index tabs in place.
10. Drawers of a composite core miter-fold construction, laminated with vinyl material, are non-conforming.
11. File drawers that require a separate metal file frame to accommodate hanging folders are non-conforming.

Sample of Construction and Quality Compliance Documentation for Veneer Components:

General Requirements:

1. Veneers shall be "natural". "Composite" or "reconstituted veneer" shall not be acceptable.
2. Drawer fronts shall have a vertically matched veneer within each pedestal set.
3. Veneer thickness shall be 0.4mm - 0.7mm.
4. All segments in one panel shall be the same size, except the two outside edge segments can be narrower to visually balance the panel. Any cathedral grain pattern shall be centered within the flitch.
5. All veneer plates on one panel shall come from the same flitch of veneer; mismatched plates are non-conforming.
6. The grain direction on exterior panels, including doors and drawers, shall be vertical, with cathedral peaks pointed toward the top of the panel.
7. The grain direction on straight and extended corner work surfaces shall run parallel to the long dimension of the work surface, and shall have a visual balance in the wood grain pattern in both width and depth.
8. The veneer on a separate corner work surface shall run parallel to the 45 degree user edge.
9. Wood veneer surfaces shall be bonded to the core with a PVA or other low VOC adhesive utilizing either a hot or cold press process to ensure complete lamination to the core.
10. Products shall be available in "semi-open pore" or "full-fill" finishes.
11. No unfilled worm holes, spike knots, veneer patches, bark pockets, torn grain, open splits, rough cuts, or ruptured grain shall be permitted on exposed surfaces, except as otherwise noted below.

Premium Visibility Surface Requirements:

1. Premium visibility surfaces include the following:
 - a. Work surfaces and storage tops ~29"H.
 - b. Drawer and door fronts.
2. Wood veneer for these surfaces shall conform to the following requirements:
 - a. Plain-sliced (flat-cut).
 - b. Cathedrals shall be centered in segment.
 - c. Split heart is permitted if a man-made cathedral is achieved.

- d. Cathedrals with wild grain that deviates from the desired arc shape shall be minimal and shall have less than four concave (opposite the cathedral direction) points per cathedral line.
- e. The average sapwood content for cherry and walnut veneer shall be from 0-5%, with no more than 20% maximum on any individual furniture item. Sapwood areas shall be treated and toned to be uniform in color with adjacent heartwood areas.
- f. Slight color and/or mineral streaks that run parallel to the grain shall be permitted.
- g. Slight color variation with no sharp contrast is permitted.
- h. Veneer shall be book or slip matched.
- i. Minimum nominal segment width shall be 5".
- j. Conspicuous pin knots shall be ¼" maximum diameter with the dark portion no greater than ⅛" diameter; conspicuous burls shall be ⅜" diameter maximum diameter. Average combined quantity shall not exceed 10 per 32 sq. ft. for maple and 24 per 32 sq. ft. for cherry and walnut.
- k. Birdseye in maple shall be scattered with no clusters.
- l. Slight sugar in maple is permitted. Sugar streaks shall be parallel to the grain and shall be lighter than the darkest cathedral.
- m. Occasional sound and scattered gum spots in cherry shall be permitted.
- n. Slight worm tracks parallel to the grain and lighter than the darkest cathedral shall be permitted.
- o. Occasional vine marks and cross bars are permitted.
- p. No bull's eye is permitted in walnut.
- q. A maximum of two repaired hairline splits no larger than 1/16" x 6" are permitted.
- r. Small blending repairs are permitted.

High Visibility Surface Requirements:

1. High visibility surfaces include the following:
 - a. Tops of mobile pedestals.
 - b. Exterior face of modesty panels, pedestals, and overhead storage end panels.
 - c. Exterior ends of overhead storage cabinets, wardrobe and storage cabinets, and lateral files.
2. Wood veneer for these surfaces shall conform to the following requirements:
 - a. Plain-sliced (flat-cut).
 - b. Cathedrals shall be centered in segment.
 - c. Split heart is permitted if a manufactured cathedral is achieved.
 - d. Cathedrals with wild grain that deviates from the desired arc shape are permitted and shall have less than four concave (opposite the cathedral direction) points per cathedral line.
 - e. The average sapwood content for cherry and walnut veneer shall be from 0-5%, with no more than 20% maximum on any individual furniture item. Sapwood areas shall be treated and toned to be uniform in color with adjacent heartwood areas.
 - f. Color and/or mineral streaks that run parallel to the grain shall be permitted. Mineral streaks in maple shall be blending.
 - g. Slight color variation with no sharp contrast is permitted.
 - h. Veneer shall be slip matched.
 - i. Minimum nominal segment width shall be 3".
 - j. Conspicuous pin knots shall be ¼" maximum diameter with the dark portion no greater than ⅛" diameter; conspicuous burls shall be ½" maximum diameter. Average combined quantity shall not exceed 10 per 32 sq. ft. for maple, and 64 per 32 sq. ft. for cherry and walnut.
 - k. Scattered sound and repaired knots are permitted. Sound knots shall be ⅜" maximum diameter; repaired knots shall be ⅛" maximum diameter. The combined average number shall be no more than 4 per 32 sq. ft.
 - l. Birdseye in maple is permitted; clusters shall not be heavy.

- m. Occasional sugar in maple is permitted. Sugar streaks shall be parallel to the grain and shall be lighter than the darkest cathedral.
- n. Occasional sound and scattered gum spots and streaks in cherry shall be permitted.
- o. Slight worm tracks parallel to the grain and lighter than the darkest cathedral are permitted.
- p. Vine marks and cross bars are permitted.
- q. Bull's eye is permitted in walnut.
- r. A maximum of four repaired hairline splits no larger than $\frac{1}{8}$ " x 8" are permitted.
- s. Slight rough cut/ruptured grain is permitted.
- t. Blending repairs are permitted.

Moderate Visibility Surface Requirements:

1. Moderate visibility surfaces include the following:
 - a. Interior face of modesty panels and both faces of overhead storage end panels.
 - b. Interior faces and shelves of bookcases.
 - c. Interior of overhead storage cabinets, wardrobe and storage cabinets.
2. Wood veneer for these surfaces shall conform to the following requirements:
 - a. Plain-sliced (flat-cut).
 - b. Split heart is permitted.
 - c. 20% sapwood permitted for cherry and walnut. Sapwood areas shall be treated and toned to be uniform in color with adjacent heartwood areas.
 - d. Color and/or mineral streaks that run parallel to the grain shall be permitted. Mineral streaks in maple shall be blending.
 - e. Color variation with some contrast is permitted.
 - f. Veneer shall be slip matched.
 - g. Minimum nominal segment width shall be 3".
 - h. Conspicuous burls and pin knots in cherry and walnut are permitted.
 - i. Birdseye in maple is permitted.
 - j. Sugar in maple is permitted. Sugar streaks shall be parallel to the grain and shall be lighter than the darkest cathedral.
 - k. Scattered sound and repaired knots less than $\frac{1}{2}$ " diameter are permitted. The combined average number shall not exceed 8 per 32 sq. ft.
 - l. Gum spots in cherry shall be permitted.
 - m. Few bark pockets not to exceed $\frac{1}{4}$ " x 2" are permitted.
 - n. Worm tracks in cherry and walnut are not permitted.
 - o. Vine marks and cross bars are permitted.
 - p. Bull's eye is permitted in walnut.
 - q. A maximum of four repaired hairline splits no larger than $\frac{1}{8}$ " x 8" are permitted.
 - r. Slight rough cut/ruptured grain is permitted.

Solid Wood Components: (Visible components only)

1. Solid wood components shall be kiln dried with moisture content from 5-10%.
2. All solid wood shall be compatible for color and grain.
3. Unlimited sound, scattered birdseye in maple is permitted.
4. Sound knots shall be no more than $\frac{1}{4}$ " in diameter.
5. Mineral stain shall not exceed 10% of the face.
6. Sapwood in cherry and walnut shall be less than 5% of the face.
7. Worm holes less than $\frac{1}{16}$ " are permitted.
8. No bark pockets, honeycomb, pitch pockets or streaks, sticker discoloration, mineral stain, or shake is allowed.

Example– Construction and Quality Compliance Documentation: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
9.1	Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Sample of “Proprietary Manufacturer’s Construction Specifications” (Engineering Specs)

XYZ Furniture Makers Awesome Contemporary Casegoods: Manufacturer’s Proprietary Construction Documentation	
Component Construction: All of XYZ’s case good components are constructed with a Grade M2 particleboard core, veneer on exposed faces and a backer sheet on all unexposed faces. Our desks and other products with a chassis construction are assembled using tenon & groove and then reinforced with hardwood cleats to assure furniture that will last decades. The back panels on our freestanding storage cabinets are let in so that there are never any raw edges visible. Additionally, the tops and ends of our storage units are securely connected with metal fasteners and hardwood biscuits. Our desk products have a central locking system where only one lock is needed to secure all drawers in the desk. Furthermore, all desk components have 1-1/2” adjustable glides which guarantee your desk shall be perfectly level no matter what flooring it sets on. At XYZ we never allow any of our construction and attachment elements to be seen within our furnishings. Instead we make sure they are concealed. Although our desks are perfectly capable of supporting the work surface through only the end panels, modesty panels are available as well	Drawer Construction:  At XYZ, our drawer construction is as follows: All drawers constructed by XYZ are 5-sided with a removable front that can be removed in the field without disturbing the contents of the drawer. The drawer sides and backs are 7/16” thick solid wood and are assembled with dowels. The drawer bottoms are constructed of a 3-ply particleboard with a veneer face and backer sheet on the underside of the panel. The drawer bottom is secured with a rabbet joint on all sides. Then it is glued and stapled. All file drawers at XYZ have full extension ball bearing slides with a dampened start/stop feature. In addition, file drawers also have full height sides with metal file rails allowing for both front-to-back and side-to-side filing. Box drawers also have the same slides but additionally offer the user access to over ¾ of the drawer’s depth. Each box drawer also comes with a drawer divider.
Storage: At XYZ, all of our overhead storage doors have concealed European style hinges which open to 110 degrees. The height between the worksurface on our casegoods and the bottom of the overhead is approximately 20”H. These overheads are secured to the worksurface with industrial grade double stick tape. In our freestanding storage, lateral file cabinets come standard with an interlock mechanism to prevent more than one drawer opening at a time. Lateral files and hybrid storage cabinets are standard with central locking. All doors in our freestanding storage line have the European hinges that open to 110 degrees. The doors on our media cabinets have pocket doors that retract and store in the cabinet to allow for unobstructed viewing of the screen. All of our storage cabinets and bookcase shelves are able to adjust on 1-1/2” centers. The interior cabinet depth of our wardrobe cabinets is 24”D allowing for the hanging of garments on standard coat hangers.	Lighting: At XYZ task lights come standard on all pieces with overhead storage or open decorative shelving. We recess our task lights into the bottom of the overhead cabinets and shelves so that the fixture is fully concealed. Our task lights provide even illumination over the length of the work surface. For the larger span overhead units (72” and above) we provide at 60”W task light. All of our tasks lights are UL listed and labeled. Electronic ballasts are provided to eliminate fluorescent lamp flicker. Task lights provide glare control and have an easily accessible on-off switch.

NOTE: The above example is shown for illustration purposes only and may not include all elements required for technical acceptance. This representative image excludes information to prevent communication of non-proprietary information.

Example– Construction and Quality Compliance Documentation Cont’d.: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
9.1	Item No. D-1: Freestanding L-Shaped Desk, Wood Veneer, Executive III

Sample of “Proprietary Manufacturer’s Wood Veneer Specifications” (Engineering Specs) Cont’d.

Veneers: XYZ uses only natural veneers on their case goods and ensures that all drawer fronts within a unit are vertically matched. Our veneer thickness is between 0.5-0.6mm. At XYZ we pride ourselves on providing only the highest level of construction. Every panel shall be comprised of veneer segments that are the same size and all veneer plates on one panel are always from the same flitch of veneer. In addition, any cathedral grain pattern will always be centered within the flitch. The grain direction on all of our exterior panels shall be vertical with cathedral peaks pointed towards the top of the panel. To ensure that the wood grain pattern has visual balance in both width and depth, the grain direction on straight and extended corner work surfaces run parallel to the long dimension of the work surface. For those separate corner work surfaces the wood grain shall be run parallel to the 45 degree user edge. At XYZ, our wood veneer surfaces are bonded to the core with a PVA adhesive in a hot press process to ensure complete lamination to the core. All of our casegoods have a semi-open pore finish.	Location of Veneer: At XYZ we take satisfaction in knowing that we provide our customers with only the best. Here is a quick guide which shows which surfaces receive which grade of veneer: Grade – Finest Quality: Work surfaces, storage tops ~ 29”H, drawer and door fronts Grade – Better Quality: Mobile pedestal tops, exterior face of modesty panels, pedestals and overhead storage cabinets, wardrobe, storage cabinets and lateral files Grade - Quality: Interior face of modesty panels, both faces of overhead storage end panels, interior faces and shelves of bookcases, interior of overhead storage cabinet, wardrobe, and storage cabinets.
---	--

XYZ Furniture Makers		Awesome Contemporary Casegoods	
SHOP SPECS			
(Proprietary Engineering Specifications)			
Veneer Type:	Natural Cherry		
Veneer Source:	All Flitches per panel are from the same log.		
Veneer Thickness:	0.5 – 0.6 mm		
Min. Nominal Segment Width:	6"		
Veneer Slice:	Plain (flat cut)		
XYZ's Veneer Visibility Features & Classifications:			
Features			
	Finest Quality Grade	Better Quality Grade	Quality Grade
Segment Size	Min. Nominal 6"	Min. Nominal 5"	~3"
Cathedral Direction	Centered in flitch; Equal quarters each side	Centered in flitch; Equal quarters each side	
Cathedral Alignment	Highest off by ~1/2"		
Wild Grain	Peaks Point Up w/ less than 2 concave points	Peaks Point Up w/ less than 3 concave points	
Flitch Deviation	None	None	
Heartwood & Sapwood	None	None: Cherry/Walnut	None

Color	Slight variation w/no sharp contrasts	Slight variation w/no sharp contrasts	Color variation with some contrast permitted,
Quarter Flake	None		
Burl, Figure Tiger Striping	1/4"max diam.- 8 per 32 sq. ft.; no prominent clusters	1/4"max diam.- 10 per 32 sq. ft.; no prominent clusters	
Pitch Pockets	.25 x.125; nominal		
Bark Pockets	None	None	Few; not to exceed 1/8" x 1"
Sugar Streaks	Slight, parallel to grain & lighter than darkest cathedral	Slight, parallel to grain & lighter than darkest cathedral	
Birdseye	Maple Only, no clusters		
Mineral Streaks	Slight parallel to grain & lighter than darkest cathedral	Slight parallel to grain & lighter than darkest cathedral	
Worm Tracks	Slight parallel to grain & lighter than darkest cathedral	Slight parallel to grain & lighter than darkest cathedral	Slight permitted
Small Burls & Pin Knots	1/4"max diam.- 8 per 32 sq. ft.; no prominent clusters	3/8" diam. Burls; 1/4"max. pin knots. 10 per 32 sq. ft-Maple; 24 per sq ft. Cherry/Walnut	Cherry/Walnut; 1/2" diam. Burls; 1/4"max. pin knots. 64 per 32 sq. ft
Gum Spots	Occasional sound & scattered in cherry only	Occasional sound & scattered in cherry only	Sound & scattered in cherry only permitted
Split Hearts	None	Permitted if mfg. cathedral achieved	
Holes	Less than 1/16" dia.		
Sticker Marks	None		
Veneer Patches	None		
Torn/Rough Grain	None	None	
Knife Marks	Only if sandable		
Repairs	Small Blending		

Veneer Placement Legend	
Grade	Placement
Finest Quality	Work Surfaces and storage tops with predominant visibility
Better Quality	Tops of mobile pedestals; Exterior face of modesty panels, pedestals, and overhead storage end panels; Exterior ends of overhead storage cabinets, wardrobe and storage cabinets, and lateral files.
Quality	Interior face of modesty panels and both faces of overhead storage end panels; Interior faces and shelves of bookcases; Interior of overhead storage cabinets, wardrobe and storage cabinets.

NOTE: The above example is shown for illustration purposes only and may not include all elements required for technical acceptance. This example represents a fictitious manufacturer's "proprietary information".

Testing Documentation

Purpose:

Confirms the product submitted has been tested against current standards and exhibits performance levels during test measurements.

What FID Items Require Testing Documentation?

Most line items require testing documentation per the corresponding Construction and Quality requirements. If a line item does not have a Construction and Quality requirements to be met, generally testing is not required, unless listed specifically within the Construction and Quality requirements.

Most ancillary items **do not** require testing documentation, such as:

- Industrial shelving, work benches and mail room equipment
- Appliances
- Waste / Recycling Containers
- Visual Communication Products

What Information Should Be Included in Testing Documentation?

Checklist – Testing Documentation:

- ☐ Item Number(s)
- ☐ Item Description
- ☐ **Actual Test Reports** for the required standard shall **include** the following components:
 - Test Standard and Edition Date (i.e., X5.5-2008)
 - Manufacturer
 - Product Tested
 - Model Number
 - Date(s) Tested
 - Test Procedures / Description
 - Observations
 - Acceptance Levels (Functional / Proof Loads)
 - Results
 - Photographs, optional
 - Test Equipment, optional
 - Verifiable digital signature containing encryption or handwritten signature, date, and title of the company official accepting technical responsibility for testing
 - Statement testing and certification apply to the product offered and that products offered meet all applicable test requirements (Note: This statement is a component of an actual test report and is not intended to be submitted in lieu of an actual report.)
- ☐ Lab Accreditation Documentation containing include (1) of the following methods of documentation for testing results:
 - Lab accreditation number and certificate number for facility type.
 - Documentation of 3rd party certification of test results.
 - If one of the above is not available, provide photographs of actual testing processes that demonstrate the methodology used is in compliance with BIFMA guidelines.

Tips to Avoid Common Mistakes:

- Actual test reports are expected to be multiple pages.

- Test summaries and/or compliance statements do not contain adequate information to fully confirm the testing procedures and results of an item.
- Manufacturers shall not expend additional time in creating a separate non-verifiable document summarizing or generalizing test compliance.
- Avoid submitting a letter of compliance that states the item meets the required testing.
- Avoid submitting a letter of compliance that lists each test requirement with a pass/fail indicator by each.
- Not providing any of the requirements listed above in the testing checklist.
- Avoid submitting test reports with outdated tests and edition dates.

Scenario – Ergonomic Task Seating

ITEM NUMBER	ITEM DESCRIPTION
15.1	Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

15.1 Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

Seat Width: 18" minimum
 Overall Height: 38"H minimum
 Back Width: 16" minimum
 Back Height: 20" minimum above the compressed seat height

*Seat width and depth shall be measured using the CMD (as defined in Section 2.0) protocol, where applicable. Seat width shall be measured from the widest outer points of the seat. Seat depth shall be from the most forward point of the back lumbar to the front edge of the seat. Overall chair height shall be measured from finished floor to top of backrest.

*If the CMD protocol is not used, seat width measurement shall be the dimension between arms, seat depth shall be measured from front of seat to front of backrest, and overall chair height shall be measured from finished floor to top of backrest.

*Contractor shall field verify hard or soft casters after award.

General Requirements:

- Style: Rectangular back, thin line design
- Shall be different than executive task seating
- Upholstered seat and mesh back:
- Seat height adjustment shall have a 4.5" minimum range between 15"- 22"
- Seat depth adjustment:
 - Shall have a 2" minimum range
 - Shall include 16.9" adjustment
- Height, width, and pivot adjustable arms:
 - Armrests shall have a 4" minimum height adjustment
 - Armrest height shall adjust from approximately 7"- 11" above the compressed seat pan height
 - Armrest width shall adjust at least 1¼" per arm (2 ½" overall)
 - Each armrest shall pivot at least 10 degrees inward and 10 degrees outward
- Lumbar mechanism shall have a 3" vertical adjustment
- 5-Star base with casters

Finish:

- a. Upholstery: Manufacturer's standard, woven, stain resistant, mid-grade fabric selection; 100,000+ double rubs shall include grey
- b. Mesh: Manufacturer's standard selection
- c. Frame, Arms, Base, and Casters: Manufacturer's standard selection

Construction and Quality Requirements- Testing and Standards:

ANSI/BIFMA X5.1-2011-General Purpose Office Chairs

- 1. The latest BIFMA Chair Measurement Device follows the BIFMA Universal Measurement Procedure BIFMA that BIFMA required for evaluating compliance.
- 2. BIFMA guideline allows a +/- 5% variance in CMD dimensions to account for many factors such as "manufacturing/material variation, operator to operator measurement variation, timing of measurements, construction details such as textiles and support materials used, etc.

FOR INFORMATION ONLY

Example – Test Report: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
15.1	Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

Test Report Required Elements
Test Standard and Edition Date (i.e., X5.1-2011)
Name of Test Organization
Accreditation Certification Number
Manufacturer
Location
Date of Report
Product Line Tested
Model Number
Date(s) Tested
Test Procedures / Description
Observations
Acceptance Levels (Functional / Proof Loads)
Results
Photographs, if available
Test Equipment, if available
Verifiable digital signature containing encryption or handwritten signature
Testing Official's Title
Date Signed
Statement testing and certification apply to the product offered and that products offered meet all applicable test requirements

NOTE: Image above is shown for illustration of required elements of an actual test report only and does not include specific product data required for technical acceptance of an item.

CEHNC understands and expects to receive actual test reports should be multiple pages in order to include all of required elements identified in the above example.

FOR INFORMATION ONLY

Example – Accreditation Certificate: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
15.1	Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

Accreditation Certificate Required Elements

Name of Accrediting Laboratory

Has accredited

Name of Manufacturer's Testing Lab

Manufacturer's Testing Lab Location

For technical competence in the field of

Field of Testing (i.e., Mechanical)

Statement verifying Lab accreditation is in accordance with the recognized the International Standard ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories. This accreditation demonstrates technical competence for a defied scope and the operation of a laboratory quality management system.

Date

Signature

Title of Official, Accrediting Organization

Certificate Number

Expiration or Valid Date Range



NOTE: Image above is shown for illustration of required elements of an actual lab accreditation certificate only and does not include specific product data required for technical acceptance of an item.

Environmental Documentation

Purpose:

Confirm each item quoted possesses the required manufacturer's environmental certifications specified in Construction and Quality requirements section.

What FID Items Require Environmental Documentation?

If an item description does not have construction and quality requirements to be met, generally environmental documentation is not required, unless listed specifically within the item description requirements.

Most ancillary items **do not** require environmental documentation, such as:

- Industrial shelving, work benches and mail room equipment
- Appliances
- Waste / Recycling Containers
- Visual Communication Products

What Information Should Be Included in Testing Documentation?

Checklist – Requirements for Environmental Documentation:

- ☐ Item Number(s)
- ☐ Item Description
- ☐ Manufacturer Name
- ☐ Product Name
- ☐ Third Party Certificate
- ☐ Environmental Compliance Statement has been checked – Refer to RFQ Attachment 7

Tips to Avoid Common Mistakes:

- Vendor shall not provide expired certificates.
- Avoid providing unnecessary "Green" marketing materials not required by FID construction and quality section, such as corporate mission statements and goals.

Scenario – Ergonomic Task Seating

ITEM NUMBER	ITEM DESCRIPTION
15.1	Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

15.1 Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

Seat Width: 18" minimum

Overall Height: 38"H minimum

Back Width: 16" minimum

Back Height: 20" minimum above the compressed seat height

*Seat width and depth shall be measured using the CMD (as defined in Section 2.0) protocol, where applicable. Seat width shall be measured from the widest outer points of the seat. Seat depth shall be from the most forward point of the back lumbar to the front edge of the seat. Overall chair height shall be measured from finished floor to top of backrest.

*If the CMD protocol is not used, seat width measurement shall be the dimension between arms, seat depth shall be measured from front of seat to front of backrest, and overall chair height shall be measured from finished floor to top of backrest.

*Contractor shall field verify hard or soft casters after award.

General Requirements:

- a. Style: Rectangular back, thin line design
- b. Shall be different than executive task seating
- c. Upholstered seat and mesh back:
- d. Seat height adjustment shall have a 4.5" minimum range between 15" - 22"
- e. Seat depth adjustment:
 - i. Shall have a 2" minimum range
 - ii. Shall include 16.9" adjustment
- f. Height, width, and pivot adjustable arms:
 - i. Armrests shall have a 4" minimum height adjustment
 - ii. Armrest height shall adjust from approximately 7"- 11" above the compressed seat pan height
 - iii. Armrest width shall adjust at least 1¼" per arm (2 ½" overall)
 - iv. Each armrest shall pivot at least 10 degrees inward and 10 degrees outward
- g. Lumbar mechanism shall have a 3" vertical adjustment
- h. 5-Star base with casters

Finish:

- a. Upholstery: Manufacturer's standard, woven, stain resistant, mid-grade fabric selection; 100,000+ double rubs shall include grey
- b. Mesh: Manufacturer's standard selection
- c. Frame, Arms, Base, and Casters: Manufacturer's standard selection

Example – Third Party Certificate: (Example of what the vendor shall provide)

ITEM

ITEM DESCRIPTION

NUMBER

15.1

Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

THIRD PARTY CERTIFICATION ORGANIZATION

Third Party does hereby certify that an independent assessment has been conducted on behalf of:

XYZ Manufacturer

Address/Location

For Product(s):

Seating Model AA1A

Awesome Seating

This product meets all of the necessary qualifications to be certified for the environmental claim listed:

Sustainability Claim Standard

Registration # for Third Party Certification Organization

Valid Certification Date Range

Sustainability
Claim Logo

NOTE: Image above is shown for illustration of required elements of an actual third part certificate only and does not include specific product data required for technical acceptance of an item.

Warranty Documentation

Purpose:

Confirms each item quoted carries the required manufacturer's warranty coverage specified in the Construction and Quality requirements.

What FID Items Require Warranty Documentation?

The manufacturer's warranty is contractually required to provide the warranty terms and coverage specific in the FID. If an item description does not have construction and quality requirements to be met, generally warranty documentation is not required, unless listed specifically within the item description requirements.

Most ancillary items **do not** require warranty documentation, such as:

- Industrial shelving, work benches and mail room equipment
- Appliances
- Waste / Recycling Containers
- Visual Communication Products

What Information Should Be Included in Warranty Documentation?

Checklist – Requirements for Warranty Documentation:

- ☐ Item Number(s)
- ☐ Manufacturer
- ☐ Warranty Coverage Period for quoted item
- ☐ Manufacturer's Letter of Warranty Coverage Extension to meet FID warranty requirements, if standard warranty does not satisfy requirements.

Tips to Avoid Common Mistakes:

- If standard warranty does not meet the FID requirements, provide a letter regarding warranty coverage extension from manufacturer.
- Clearly indicate FID warranty requirements are met. For example, if multi-shift coverage on task chairs is required, do not provide a chair with only single shift use warranty coverage.

Scenario – Ergonomic Task Seating

ITEM NUMBER	ITEM DESCRIPTION
15.1	Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

15.1 Item No. C-1: Ergonomic Task Chair, Upholstered, Mesh Back

Seat Width: 18" minimum
Overall Height: 38"H minimum
Back Width: 16" minimum
Back Height: 20" minimum above the compressed seat height

*Seat width and depth shall be measured using the CMD (as defined in Section 2.0) protocol, where applicable. Seat width shall be measured from the widest outer points

of the seat. Seat depth shall be from the most forward point of the back lumbar to the front edge of the seat. Overall chair height shall be measured from finished floor to top of backrest.

*If the CMD protocol is not used, seat width measurement shall be the dimension between arms, seat depth shall be measured from front of seat to front of backrest, and overall chair height shall be measured from finished floor to top of backrest.

*Contractor shall field verify hard or soft casters after award.

General Requirements:

- a. Style: Rectangular back, thin line design
- b. Shall be different than executive task seating
- c. Upholstered seat and mesh back:
- d. Seat height adjustment shall have a 4.5" minimum range between 15"- 22"
- e. Seat depth adjustment:
 - i. Shall have a 2" minimum range
 - ii. Shall include 16.9" adjustment
- f. Height, width, and pivot adjustable arms:
 - i. Armrests shall have a 4" minimum height adjustment
 - ii. Armrest height shall adjust from approximately 7"- 11" above the compressed seat pan height
 - iii. Armrest width shall adjust at least 1¼" per arm (2 ½" overall)
 - iv. Each armrest shall pivot at least 10 degrees inward and 10 degrees outward
- g. Lumbar mechanism shall have a 3" vertical adjustment
- h. 5-Star base with casters

Finish:

- a. Upholstery: Manufacturer's standard, woven, stain resistant, mid-grade fabric selection; 100,000+ double rubs shall include grey
- b. Mesh: Manufacturer's standard selection
- c. Frame, Arms, Base, and Casters: Manufacturer's standard selection

Construction and Quality Requirements- Warranty Requirements:

- 1. 10 year – Mechanisms, pneumatic cylinders, casters, arms, and seat pan adjustment.
- 2. 5 year – Foam and fabric.
- 3. Warranty shall cover 24/7 application and users up to 300 pounds. Multi-shift applications shall not cause warranty to be pro-rated.

Example – Warranty: (Example of what the vendor shall provide)

ITEM NUMBER	ITEM DESCRIPTION
----------------	------------------

15.1	Item No. C-1: Ergonomic Task Seating, Upholstered, Mesh Back
------	--

Super Duper Furniture, LLC. (SDF) warrants that SDF products are free from defects in materials and workmanship for the life of the product, except as set forth below. This warranty is valid from the date of delivery, regardless of shift usage, and covers the original purchaser for products delivered in the specified location of coverage.

Exceptions to the warranty include:

Office Seating coverage

10 years on mechanisms, pneumatic cylinders, arm caps, foam, casters and glides, stacking chairs, wood frame side chairs, tablet arms, and optional accessories

Healthcare Seating

7 years on recliners, sleeper and locking mechanisms and associated levers and pedals

Classroom Seating

12 years on tablets, optional accessories, learning stations, lectern and plastic components

Boards and Easels; 3 years on tackboards; 5 years on markerboards

Ergonomic Accessories

12 years on keyboard mechanisms and platforms, monitor arms, personal task lighting fixtures

Surfaces & Textiles

12 years on laminate, wood veneer and solid surface, all standard panel fabrics

5 years on textiles, including graded-in programs.

This warranty does not include:

Customer's Own Material or finishes applied to SDF products

Wood color, grain and stain acceptance which may occur due to the natural elements of wood;

Products which have been modified or which have not been installed or used according to

Super Duper Furniture, LLC.'s application and installation guidelines or warnings;

Products that must be replaced due to normal wear and tear, negligence, abuse, accident or shipping damage;

In no event shall Super Duper Furniture, LLC. be liable in either tort or contract for any loss or direct, special, incidental, consequential or exemplary damages.

This warranty is the Customer's sole remedy for product defect. Super Duper Furniture, LLC. makes no warranties, including the express or implied warranties of merchantability and fitness for a particular purpose, other than the express warranties contained herein.

Super Duper Furniture, LLC.

NOTE: Image above is shown for illustration of required elements of a warranty statement only and does not include specific product data required for technical acceptance of an item.