

FURNITURE, FIXTURES & EQUIPMENT (FF&E)

B60 PRODUCTION FACILITY REPAIRS-SIOP

Portsmouth Naval Shipyard, Kittery, Maine

Final Submission

Amendment 008, March 10, 2026



Prepared For:

NAVFAC MIDLANT
Portsmouth Naval Shipyard
Kittery, Maine

A/E Contract No.: N40085-21-D-0059
Task Order No.: N4008524F4887
eProjects Work Order No.: 1740579

October 1, 2025

Prepared By:



OAK POINT
ASSOCIATES

architecture
engineering
planning

OPTION 1 FURNITURE, FIXTURES, AND EQUIPMENT (pages 2-15)

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.


BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
C1	18	Herman Miller Aeron Chair: Mesh seat and back, lumbar support, height adjustable arms, standard tilt adjustment, 5-star graphite base, 3 sizes, 12 year warranty, 350 lb weight capacity.						
C2	8	McMaster Carr Guest Chair (4676T24): Side chair with black powder coated steel frame, 4- leg base with glides, vinyl padded backrest and seat, 250 lb. weight capacity.						
C3	1	SitOnIt Composium Lounge Chair: Steel rail construction, monofilament webbing, high density foam cushions, vinyl covering, tablet arm.						
C4	58	NBF's Figo Armless Stack Chair: Polypropylene, perforated radiused seat back and contoured, extra-wide seat pan, 400lb Weight Capacity.						
C5	8	Herman Miller's Fuld Nesting Chair: Polymer seat and back, tubular arms, contoured back, flexing back, 350 lb weight capacity.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
D1	12	6' x 7' Powered Workstation: Open bottom panels at wall locations for access to utilities, Overhead storage, (2) under desk file cabinets, Sit to Stand capability at computer side, optional dual monitor mounting brackets, task lighting, power/data at desk height. Provide workstation identification signage per UFC 3-120-01.						
D2	1	Private Office Desk: 6'-0" x 7'-0" L Shaped Desk, height adjustable freestanding desk, storage desk height return, overhead storage, white board, and armoire.						
D3	2	American Commercial Furniture Office Desk (1022237): Durable, powder-coated steel frame with chrome-plated 1" square tubular steel legs and square edge laminated top. Includes a full extension, locking file drawer with telescoping ball bearing slides. Box drawer operates on steel roller suspensions. Aluminum drawer handles. Three-quarter height modesty panel. Leveling glides. Dimensions: 60"W x 24"D x 29-1/2"H.						
D4	1	Uline Instructor Desk (H-9014): Sit/Stand Mobile Desk with extra large laminate work surface with underside shelf, pneumatic lift adjusts height from 28-42", aluminum frame with 4 swivel casters, 2 locking. Dimensions: 30" x 22".						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
D5	3	Global Industrial Office Desk (WB670073GY): 1" thick laminate top with steel file cabinet which has two box drawers and one file drawer and cable management grommet. Steel frame & modesty panel with a black powder coat finish. Dimensions: 60"W x 24"D x 30"H.						
T1	7	Herman Miller's Everywhere Break Room Table: 36"x 60" plastic laminate table top, casters.						
T2	6	Herman Miller's Everywhere Break Room Table: 36"x 72" plastic laminate table top, casters.						
T3	1	Herman Miller's Nemschoff Riva Side Table: 22" square, 1" thick laminate top and powder-coated metal legs with non-marring 7/8" glides.						
T4	4	Uline Standard Training Table (H-6279): Laminate surface resists scratches, stains, and spills. Top flips up 90° with one flip lever for compact storage, 2 grommets for cable management, powder-coated steel frame with 3" locking swivel casters. Tables nest when not in use. Dimensions: 60"W x 24"D x 29 1/2"H.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
S1	5	Global Industrial Lateral file cabinet (WBB690995). Heavy duty 42" wide, 4 drawer commercial grade lateral filing cabinet. Precision ball-bearing suspension. Fully welded steel construction with reinforced base. Interlock system prevents tipping by only allowing one drawer open at a time. Dual lock bars and core-removable lock come standard. Unit includes hang rails, magnetic label holders, and four adjustable leveling glides.						
S2	80	Single Tier Metal Locker: 15"x18". Powdered coated, hinges, three point latching, durable 16- gauge metal door. Nylon glides and rubber bumpers to minimize noise.						
A1	3	Appliance: Top-Freezer Refrigerator with 17.5 cu. ft. Capacity, Upfront Temperature Controls, Adjustable Wire Shelves, Clear Crisper Drawers and Gallon Door Bins. Max 33 inches wide (30" max width in multi-purpose room 211). Stainless steel finish. Match height of adjacent freezerless refrigerators.						
A2	4	Appliance: 1250 watt high power microwave. Heavy duty. 1.6 cubic feet interior.						
A3	1	Appliance: Coffee Maker. Two burner pour over coffee brewer, stainless steel						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
A4	17	Trash receptacle: 28 quart plastic wastebasket						
A5	2	Trash receptacle: 32 gallon capacity.Heavy duty plastic with lid.						
A6	2	Appliance: Under Counter Fridge: Adjustable shelves and door storage.						
A7	15	Fire Extinguisher: 20-lb. charge. Has stored pressure and is refillable.Dry chemical for class A:B:C: Type fires (multi-purpose phosphate).						
A8	1	32 Gallon Bottle/Can Recycle container						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
A9	1	Global Industrial Mobile Whiteboard (WB695693): This mobile glass board features a magnetic, 72"W x 48"H double sided glass whiteboard which sits atop a sturdy steel powder coated frame. 3" casters (2 locking) allow you to easily move the board. Heavy duty 1-1/3" thick tempered glass will not dent, stain or ghost and accepts both dry and wet erase markers. Steel tray keeps all accessories in reach. Includes dry erase eraser, magnetic eraser cloth, 4 dry erase markers and 4 heavy duty magnets.						
A12	2	Panasonic TH-75CQE2U CQE2 Series - 75" Class LED-backlit LCD display - 4K - for digital signage. The TH-75CQE2U features HDMI, RF antenna, USB, and microSD inputs and is capable of operating 16 hours per day, 7 days a week in landscape or portrait orientation. The built-in Android OS and Wi-Fi capability allow for stand-alone operation or connecting the display to a larger A/V network via RS-232 and LAN control.						
A13	2	Panasonic TH-65CQE2U CQE2 Series - 65" Class LED-backlit LCD display - 4K - for digital signage. The TH-75CQE2U features HDMI, RF antenna, USB, and microSD inputs and is capable of operating 16 hours per day, 7 days a week in landscape or portrait orientation. The built-in Android OS and Wi-Fi capability allow for stand-alone operation or connecting the display to a larger A/V network via RS-232 and LAN control.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME	
DATE: OCTOBER 1, 2025	
REQUEST FOR QUOTATION	
PART 1: Vendor Pricing	
Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.	

PART 1: Vendor Pricing

BASIS OF DESIGN	PROPOSED ITEMS
-----------------	----------------

ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
A14	4	Chief's Universal Flat Panel Dual Swing Arm Wall Mount (PNRIWUB): View large flat panel displays up to 86" or 200 lbs from any angle. Designed for installations that require a solid dual swing arm with shorter extension, and it requires the sold separately Chief PAC501 mounting accessory. The dual arms extend up to 24-7/8" from the wall, pivots up to 90° left or right of center, and folds down to only 3-1/4" in the home position. 22 inch						
A15	4	Chief's In-Wall Swing Arm Accessory (PAC501B): Compatible with Chief's Universal Flat Panel Dual Swing Arm Wall Mount.						
A16	2	Appliance: Freezerless Refrigerator with 18.4 cu. ft. Capacity Upfront Temperature Controls Adjustable Wire Shelves Clear Crisper Drawers and Gallon Door Bins. Max 33 inches wide. Stainless steel finish.						

Product Total			\$	-
Freight/Delivery/Handling, if not FOB destination (% of product total)	*	0.00%	\$	-
State Sales Tax, if applicable	*	0.00%	\$	-
Installation (% of product total)	*	0.00%	\$	-
Design Fee (% of product total)	*	0.00%	\$	-
Project Mgmt Fee (% of product total)	*	0.00%	\$	-
TOTAL			\$	-
Storage - Provide price for 30 day increment in case of unforeseen construction delays - See BVD Request for Pricing Cover Letter				

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products indentified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE

*ADJUST FORMULAS TO CALCULATE PROPOSED FEE PERCENTAGES (%)

rev 27FEB2023


9/26/2025 9:56:29 AM AE801
C:\Users\cear\Documents\227103.25 BLDG80_ARCHITECTURAL-V23_cear\HCLDR.rvt

D

C

B

A

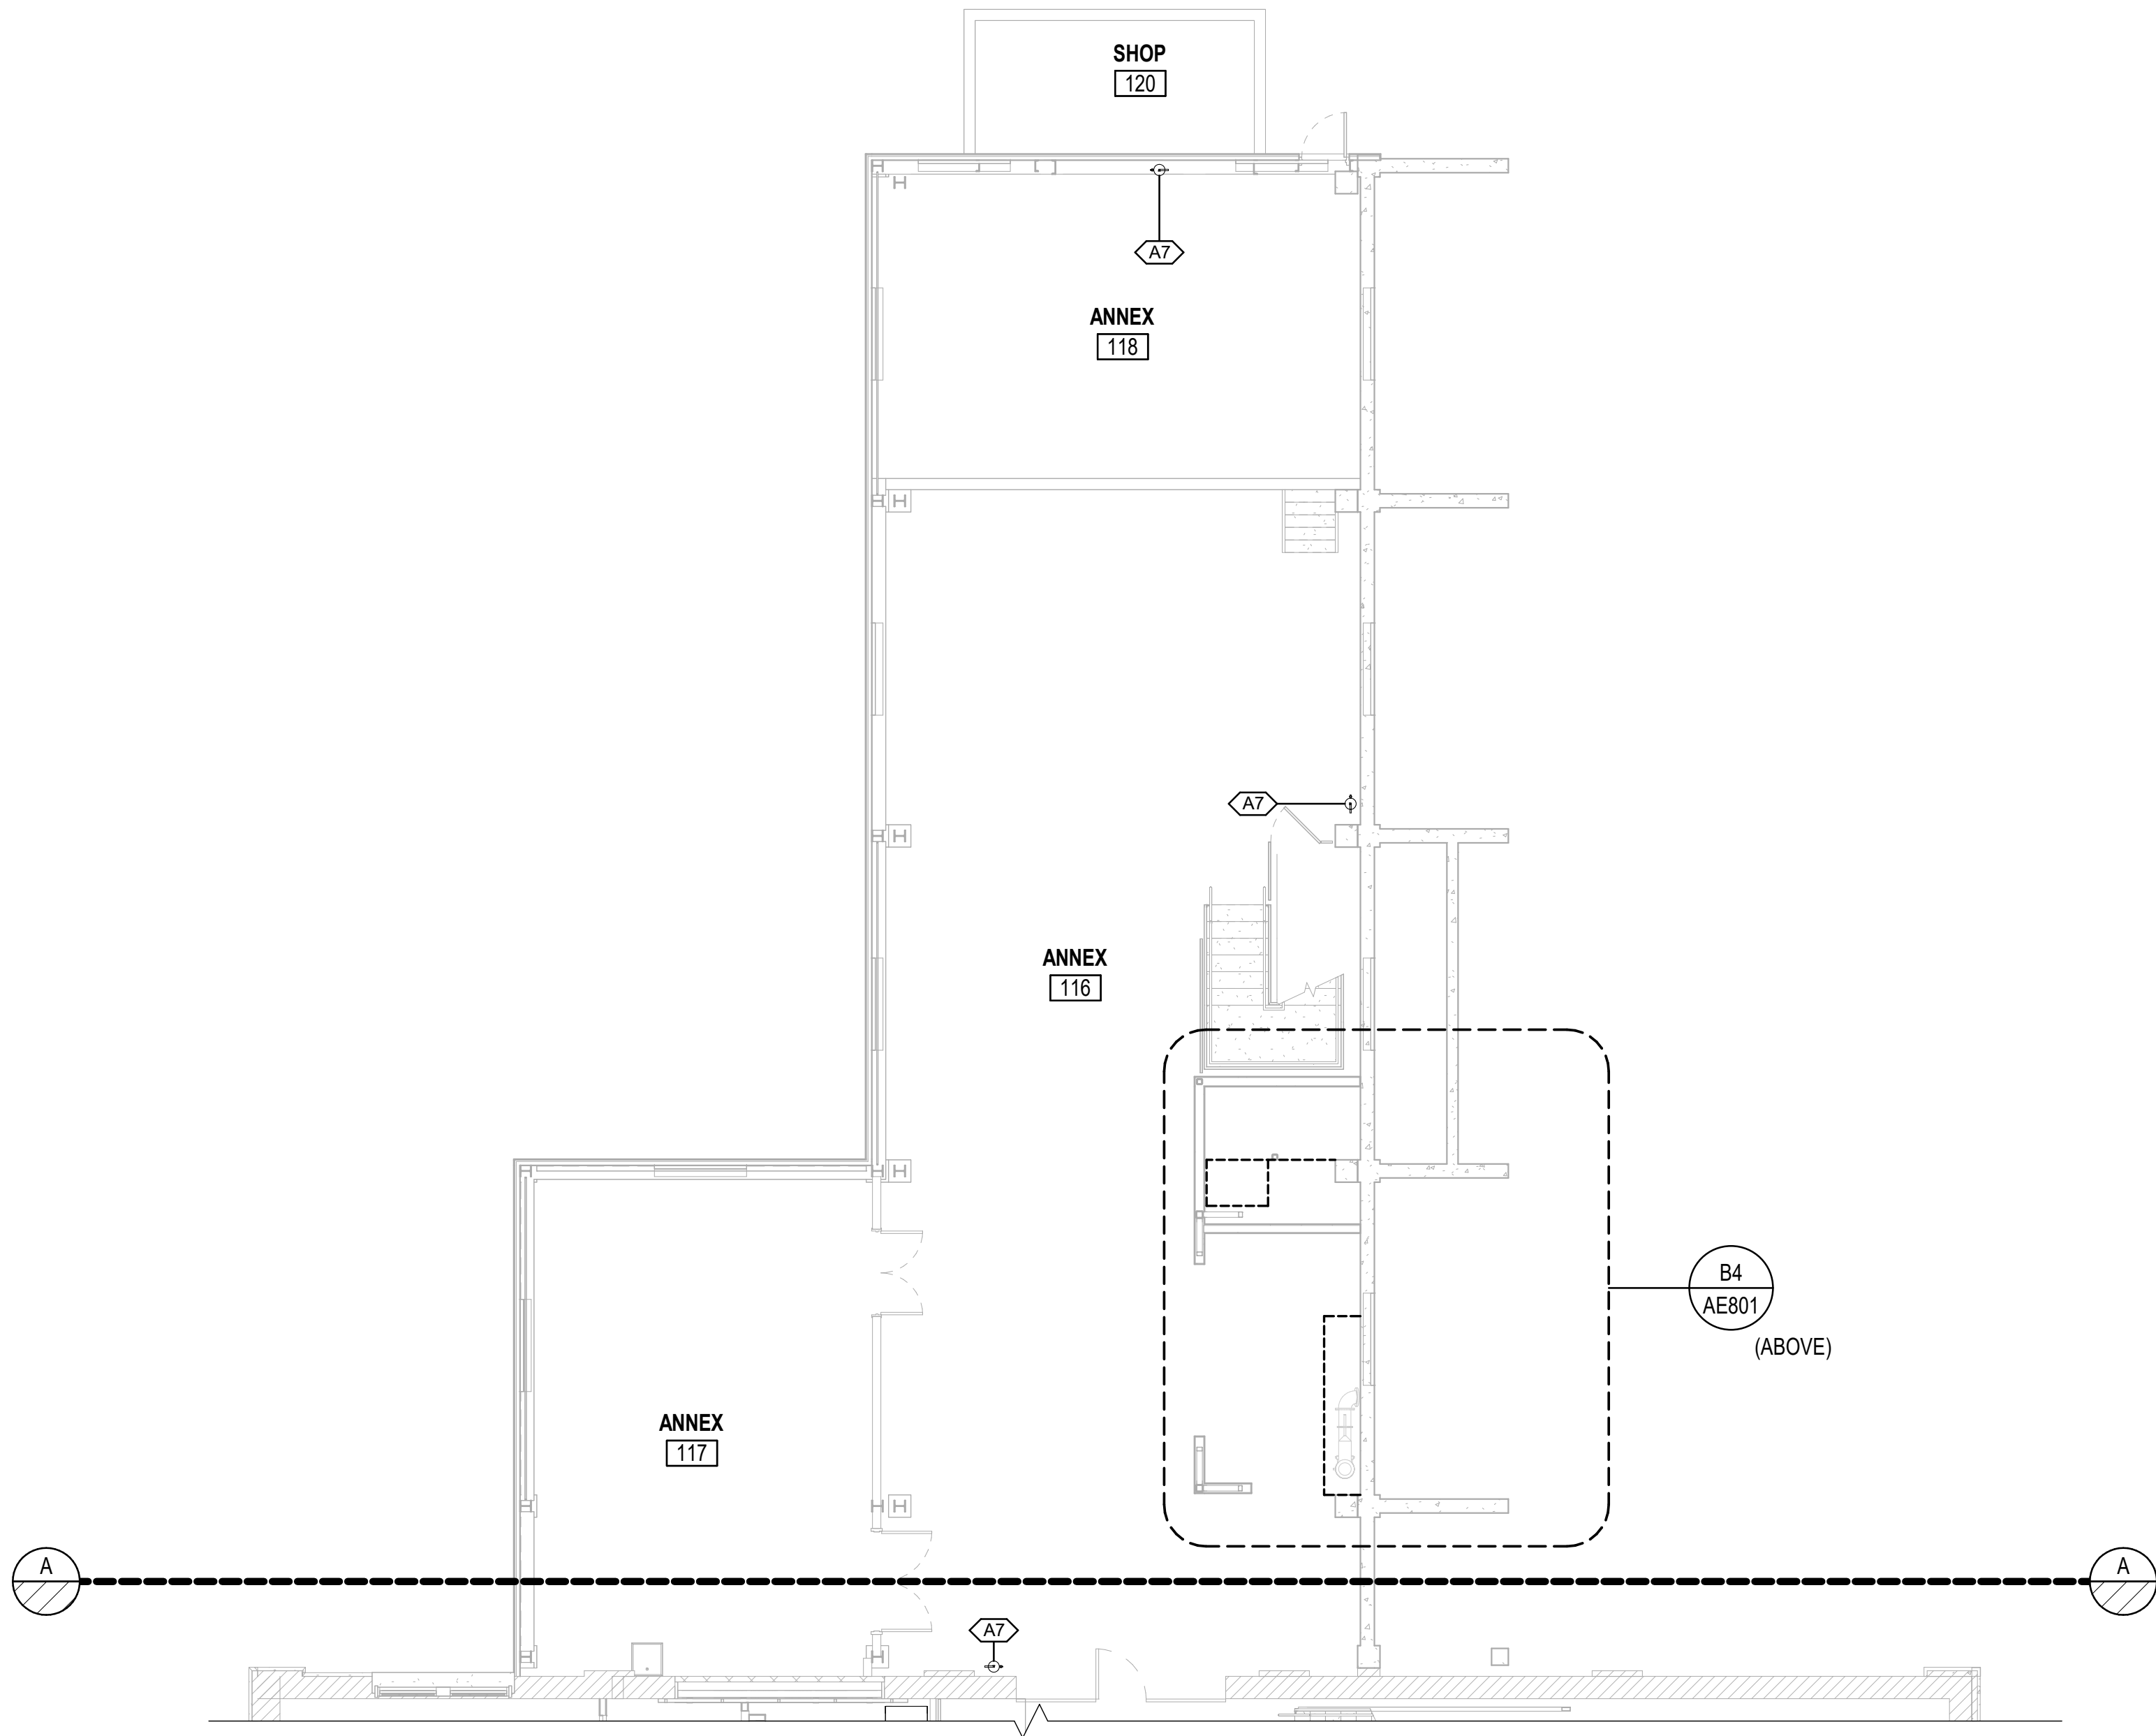


B1 FIRST FLOOR FF&E PART PLAN - EAST
SCALE: 1/8" = 1'-0"

FF&E SCHEDULE		
ITEM	NAME	DESCRIPTION
A1	APPLIANCE	REFRIGERATOR/FREEZER
A2	APPLIANCE	MICROWAVE
A3	APPLIANCE	COFFEE MAKER
A4	TRASH	WASTEBASKET
A5	TRASH	WASTEBASKET-BREAKROOM
A6	APPLIANCE	UNDER COUNTER FRIDGE
A7	APPLIANCE	FIRE EXTINGUISHER
A8	TRASH	RECYCLE
A9	WHITEBOARD	MOVEABLE WHITEBOARD
A10	NOT USED	
A11	NOT USED	
A12	TV	75"
A13	TV	65"
A14	TV MOUNT	UNIVERSAL SWING ATM
A15	ACCESSORY	WALL MOUNT ACCESSORY
A16	APPLIANCE	REFRIGERATOR

FF&E SCHEDULE CONT.		
ITEM	NAME	DESCRIPTION
C1	CHAIR	TASK CHAIR
C2	CHAIR	GUEST CHAIR
C3	CHAIR	LOUNGE CHAIR
C4	CHAIR	BREAK ROOM CHAIR
C5	CHAIR	TRAINING CHAIR
D1	WORKSTATION	7' x 6' WORKSTATION
D2	DESK	PRIVATE OFFICE DESK
D3	DESK	24" x 60" DESK WITH (2) FILE CABINET
D4	DESK	INSTRUCTOR PODIUM
D5	DESK	24" x 60" DESK WITH (1) FILE CABINET
T1	TABLE	36" x 60" BREAK TABLE
T2	TABLE	36" x 72" BREAK ROOM TABLE
T3	TABLE	OCCASIONAL TABLE
T4	TABLE	TRAINING TABLE
S1	STORAGE	LATERAL FILE
S2	LOCKER	15" x 18" SINGLE TIER LOCKER

B4 FIRST FLOOR MEZZANINE FIRE PUMP ROOM FF&E PART PLAN
SCALE: 1/8" = 1'-0" (90.1 Appendix G 105)

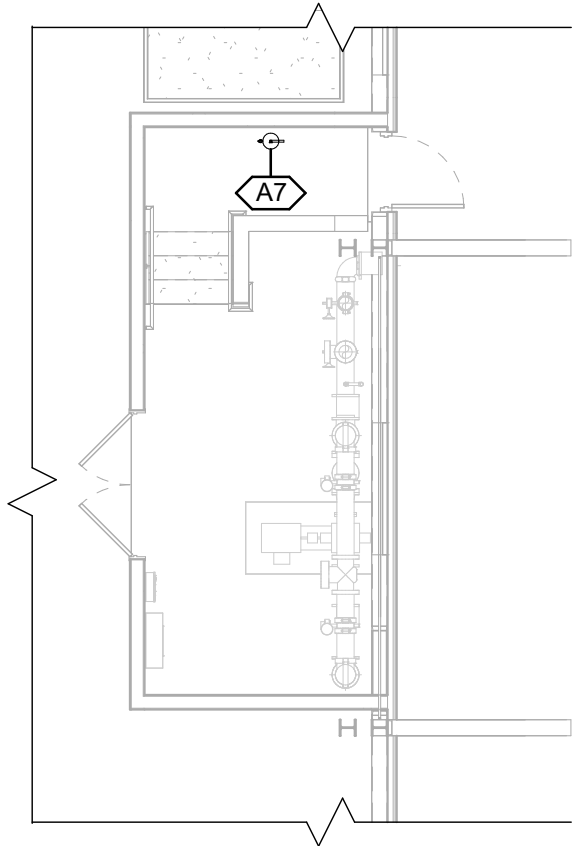

GENERAL NOTES

1.

TAGGED ITEMS (<00>) ARE IN THE FF&E PACKAGE. FF&E ITEMS NOT LISTED IN THE SCHEDULE ARE NOT IN CONTRACT (NIC) AND SHOWN FOR COORDINATION PURPOSES.

2.

SEE FF&E PACKAGE DOCUMENT FOR ITEM DESCRIPTION.

3.

SEE SHEET AE640 FOR ROOM FINISH SCHEDULE.

GRAPHIC SCALE(S)

1/8" = 1' - 0"

0

5'

10'

15'

30'

NAVFAC

PRELIMINARY
NOT FOR CONSTRUCTION

POINT ASSOCIATES

APPROVED

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER JMR

DRAWN BY CJE

CHECKED BY PFD

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

LEAD/PM/ME

FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

MIDLANT DC CORE

PORTSMOUTH NAVAL SHIPYARD

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

B60 REPAIRS

FIRST FLOOR FF&E PART PLAN - EAST (OPTION 1)

PROJECT NO. 1740579

NAVFAC DRAWINGS NO.

SHEET 145 OF 284

AE801

DATE 10/01/2025

FINAL SUBMISSION

SYN DESCRIPTION

APPR


D

C

B UNCLASSIFIED

A

9/26/2025 9:58:09 AM AE802
C:\Users\cear\Documents\227103.25 BLDG80_ARCHITECTURAL-V23_cear\HCLDR.rvt

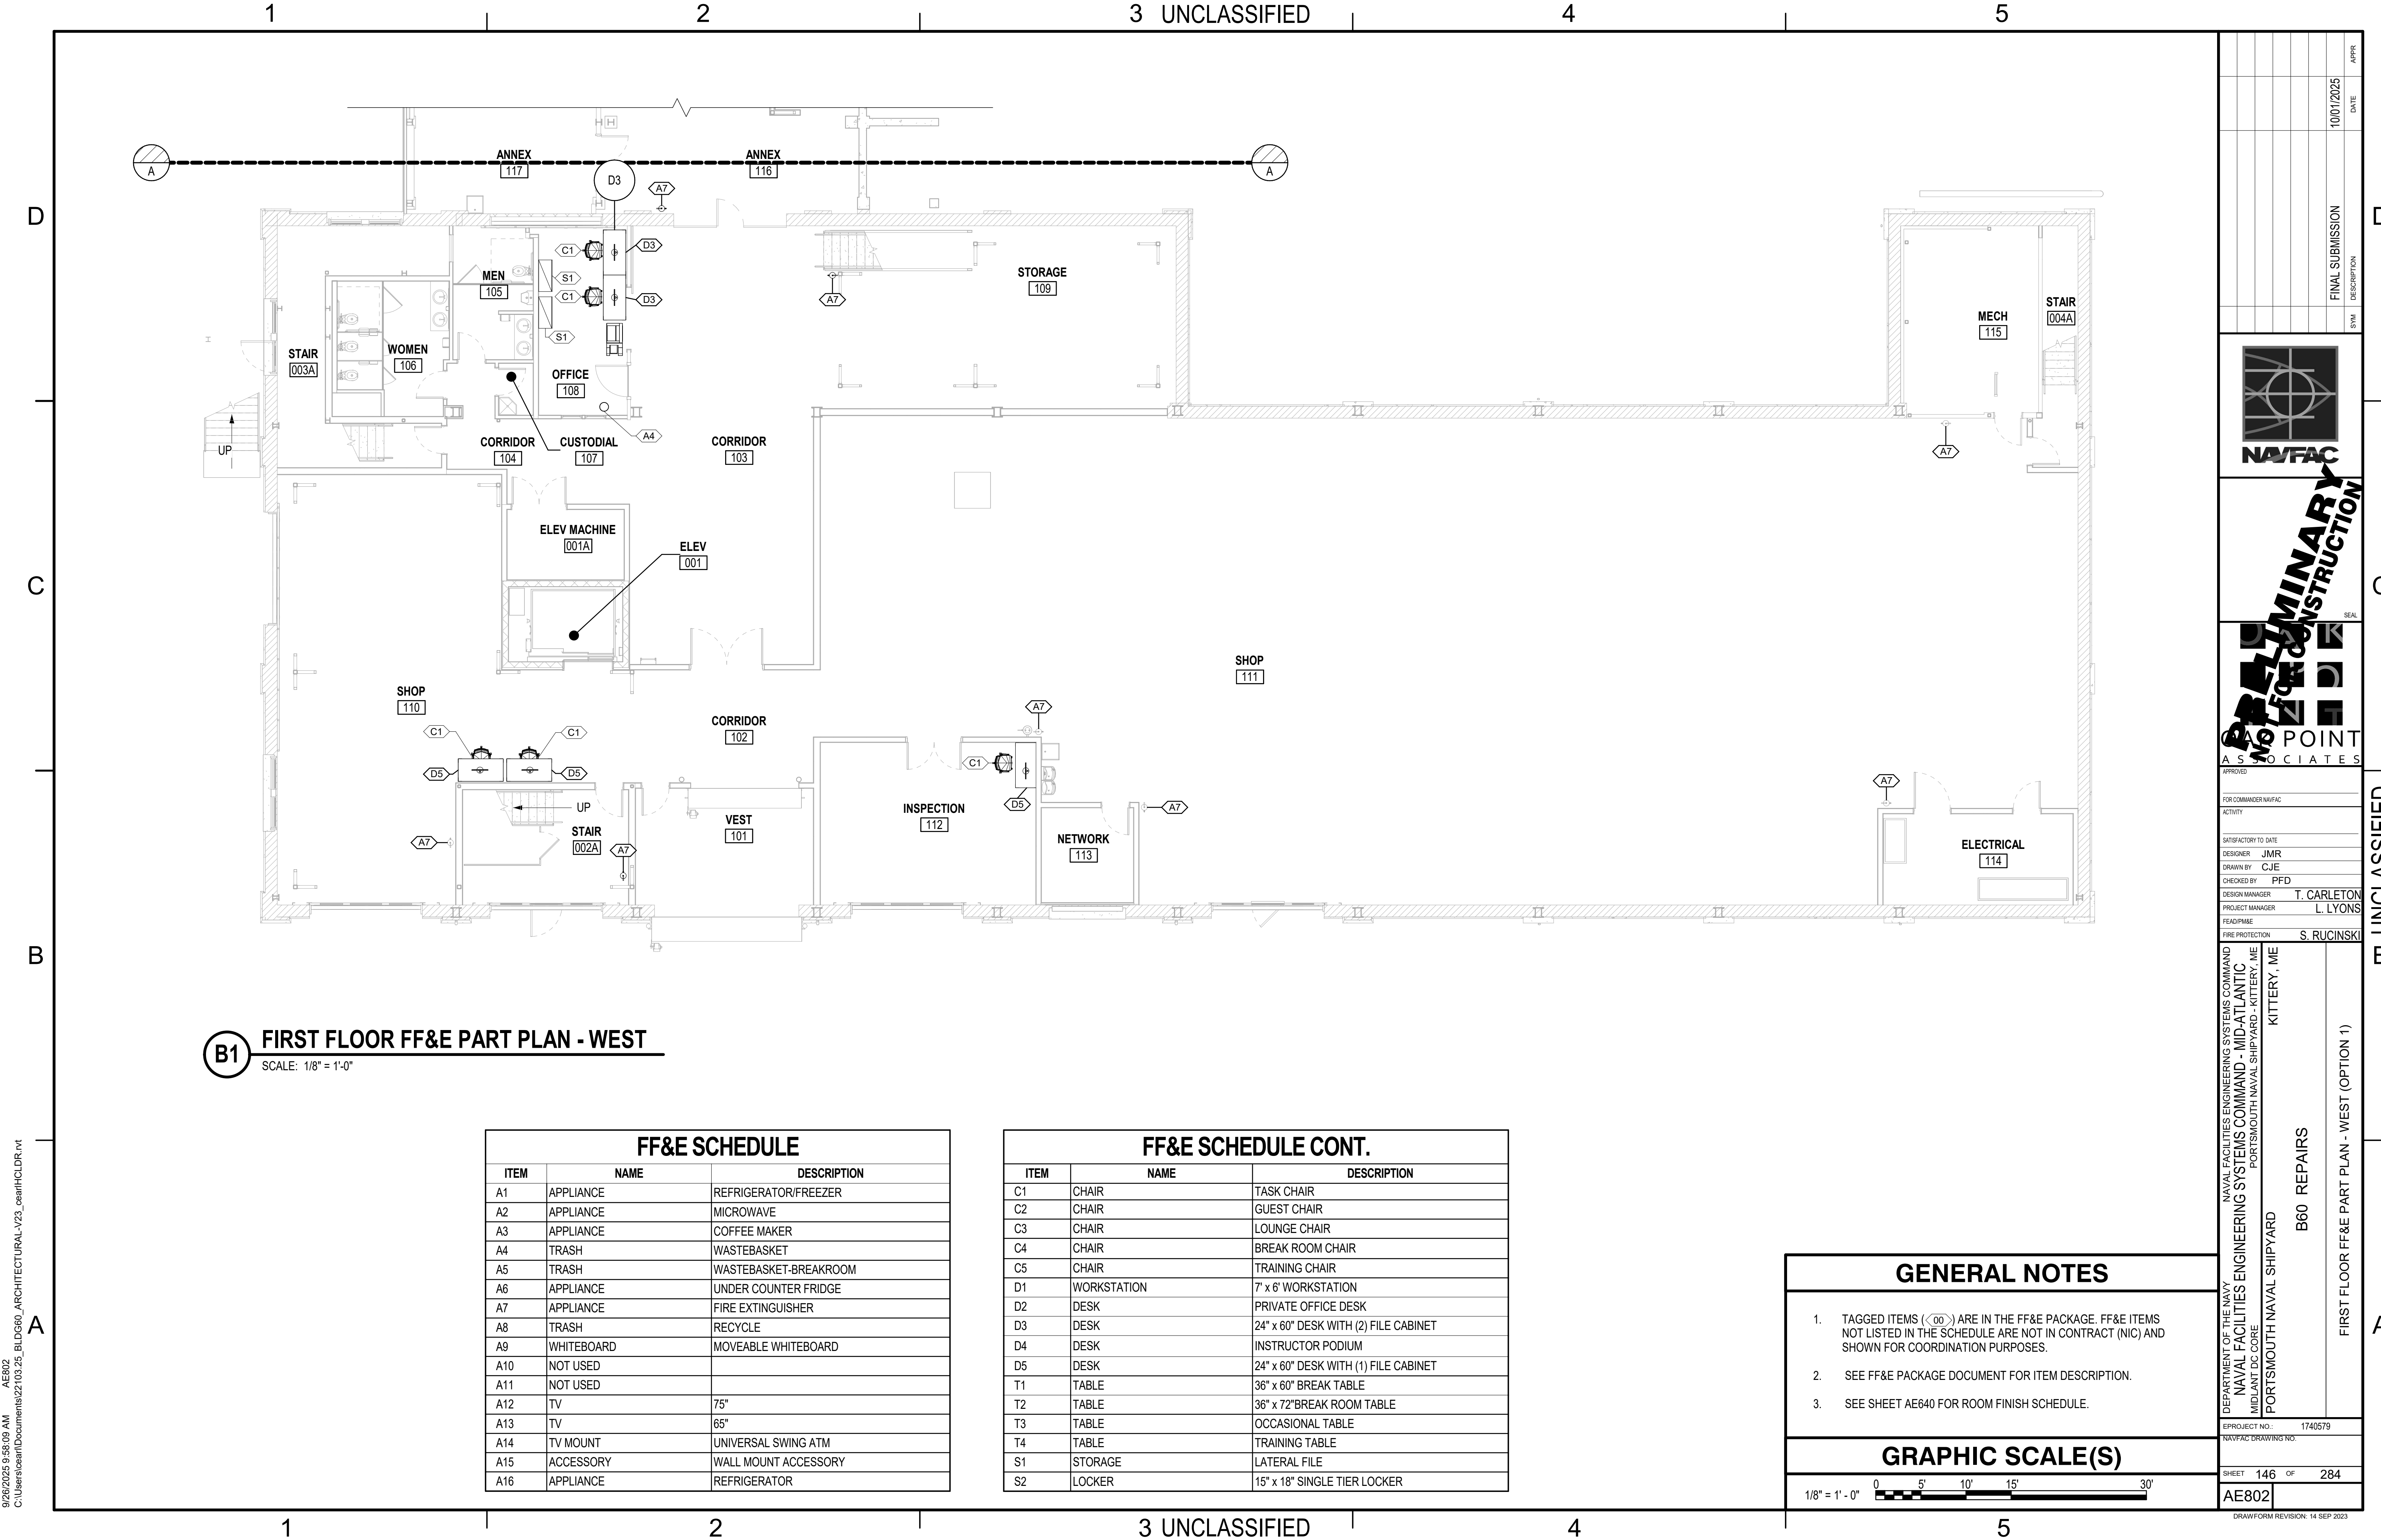

B1 FIRST FLOOR FF&E PART PLAN - WEST
SCALE: 1/8" = 1'-0"

FF&E SCHEDULE		
ITEM	NAME	DESCRIPTION
A1	APPLIANCE	REFRIGERATOR/FREEZER
A2	APPLIANCE	MICROWAVE
A3	APPLIANCE	COFFEE MAKER
A4	TRASH	WASTEBASKET
A5	TRASH	WASTEBASKET-BREAKROOM
A6	APPLIANCE	UNDER COUNTER FRIDGE
A7	APPLIANCE	FIRE EXTINGUISHER
A8	TRASH	RECYCLE
A9	WHITEBOARD	MOVEABLE WHITEBOARD
A10	NOT USED	
A11	NOT USED	
A12	TV	75"
A13	TV	65"
A14	TV MOUNT	UNIVERSAL SWING ATM
A15	ACCESSORY	WALL MOUNT ACCESSORY
A16	APPLIANCE	REFRIGERATOR

FF&E SCHEDULE CONT.		
ITEM	NAME	DESCRIPTION
C1	CHAIR	TASK CHAIR
C2	CHAIR	GUEST CHAIR
C3	CHAIR	LOUNGE CHAIR
C4	CHAIR	BREAK ROOM CHAIR
C5	CHAIR	TRAINING CHAIR
D1	WORKSTATION	7' x 6' WORKSTATION
D2	DESK	PRIVATE OFFICE DESK
D3	DESK	24" x 60" DESK WITH (2) FILE CABINET
D4	DESK	INSTRUCTOR PODIUM
D5	DESK	24" x 60" DESK WITH (1) FILE CABINET
T1	TABLE	36" x 60" BREAK TABLE
T2	TABLE	36" x 72" BREAK ROOM TABLE
T3	TABLE	OCCASIONAL TABLE
T4	TABLE	TRAINING TABLE
S1	STORAGE	LATERAL FILE
S2	LOCKER	15" x 18" SINGLE TIER LOCKER

GENERAL NOTES

1. TAGGED ITEMS (<00>) ARE IN THE FF&E PACKAGE. FF&E ITEMS NOT LISTED IN THE SCHEDULE ARE NOT IN CONTRACT (NIC) AND SHOWN FOR COORDINATION PURPOSES.

2. SEE FF&E PACKAGE DOCUMENT FOR ITEM DESCRIPTION.

3. SEE SHEET AE640 FOR ROOM FINISH SCHEDULE.

GRAPHIC SCALE(S)

1/8" = 1' - 0"

0

5'

10'

15'

30'

NAVFAC

PRELIMINARY
NO FOR CONSTRUCTION

POINT
ASSOCIATES

FOR COMMANDER NAVFAC

ACTIVITY

SATISFACTORY TO DATE

DESIGNER JMR

DRAWN BY CJE

CHECKED BY PFD

DESIGN MANAGER T. CARLETON

PROJECT MANAGER L. LYONS

HEAD/PM/ME S. RUCINSKI

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC

PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME

B60 REPAIRS

FIRST FLOOR FF&E PART PLAN - WEST (OPTION 1)

PROJECT NO. 1740579

NAVFAC DRAWINGS NO.

SHEET 146 OF 284

AE802

DRAWING REVISION: 14 SEP 2023



NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND**PRELIMINARY FURNITURE, FIXTURES & EQUIPMENT (FF&E) COST SUMMARY****PROJECT: B60 PRODUCTION FACILITY REPAIRS-SIOP****LOCATION: PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME****DATE: October 1, 2025**

CODE	QTY	ITEM DESCRIPTION	MANUFACTURER	UNIT COST	TOTAL
C1	18	Task Chair	Herman Miller or Equal	\$703.00	\$12,654.00
C2	8	Guest Chair	McMaster Carr or Equal	\$185.00	\$1,480.00
C3	1	Lounge Chair	Sit On It or Equal	\$1,015.00	\$1,015.00
C4	58	Break room Chair	NBF or Equal	\$189.00	\$10,962.00
C5	8	Nesting Chair - Training	Herman Miller or Equal	\$266.00	\$2,128.00
D1	12	Workstation 6x7	Knoll or Equal	\$5,875.00	\$70,500.00
D2	1	Private Office Desk	Knoll or Equal	\$14,000.00	\$14,000.00
D3	2	Office Desk	American Commercial or Equal	\$860.00	\$1,720.00
D4	1	Instructor Podium	Uline or Equal	\$245.00	\$245.00
D5	3	Office Desk	Global Industrial or Equal	\$560.00	\$1,680.00
T1	7	Break Room Table - 36"x60"	Herman Miller or Equal	\$483.00	\$3,381.00
T2	6	Break Room Table - 36"x72"	Herman Miller or Equal	\$562.00	\$3,372.00
T3	1	Occasional Side Table	Herman Miller or Equal	\$426.00	\$426.00
T4	4	Training Table	Uline or Equal	\$330.00	\$1,320.00
S1	5	Lateral Files	Global Industrial or Equal	\$919.00	\$4,595.00
S2	80	Single Tier Locker 15"x18"	Hallowell or Equal	\$484.23	\$38,738.40
A1	3	Refrigerator/Freezer	Whirlpool or Equal	\$927.66	\$2,782.98
A2	4	Microwave	Panasonic or Equal	\$184.77	\$739.08
A3	1	Coffee Maker	Bunn or Equal	\$622.04	\$622.04
A4	17	28 Qt Trash	Rubbermaid or Equal	\$5.49	\$93.33
A5	2	32 Gallon Trash	Rubbermaid or Equal	\$81.64	\$163.28
A6	2	Under Counter Fridge	Summit Or Equal	\$389.85	\$779.70
A7	15	Fire Extinguisher	GSA Supply or Equal	\$63.91	\$958.65
A8	1	Bottle/Can recycle Container	Rubbermaid Or Equal	\$77.13	\$77.13
A9	1	Moveable Whiteboard	Global Industrial or Equal	\$755.00	\$755.00
A12	2	75" TV	Panasonic or Equal	\$2,305.00	\$4,610.00
A13	2	65" TV	Panasonic or Equal	\$1,095.00	\$2,190.00
A14	4	Universal TV Mount	Chief or Equal	\$670.00	\$2,680.00
A15	4	TV Mount Accessory	Chief or Equal	\$280.00	\$1,120.00
A16	2	Refrigerator	Frigidaire or Equal	\$1,300.00	\$2,600.00
FF&E Product Total					\$188,387.59

Shipping/Freight*	6% (b,c)	\$11,303.26
Design Mgmt*	2.5% (b,c)	\$4,709.69
Project Mgmt*	2.5% (b,c)	\$4,709.69
Installation*	13% (b,c)	\$24,490.39
State Sales Tax (If Applicable)*		
FF&E Total		\$233,600.61
Handling and Administrative Rate (HAR) (NTE 5%)*	5% (b)	\$11,680.03
TOTAL FF&E + HAR		\$245,280.64
Bonding (If required by NAVFAC)*		
FF&E Option Item Award Amount		\$245,280.64
SIOH/Project Oversight (Proj O/S)*	0.065	\$15,943.24
TOTAL with Project Oversight (Proj O/S) if applicable		\$261,223.88

*** NOTE: Adjust all formulas to reflect vendor/project Fees, State Sales Tax, HAR, Bond and Project Oversight Rates.**

rev. 26SEPT2022

OPTION 2 INDUSTRIAL EQUIPMENT (pages 16-38)

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
EQ100A	4	*Juki Medium Weight Sewing Machine (LU-1510N-7): 1-needle, Unison-feed, Lockstitch Machine with Vertical-axis Large Hook (and automatic lubricating mechanism and automatic thread trimmer).						
EQ100C	1	*Juki Light Weight Sewing Machine (DDL 555ON): For sewing light to medium-weight materials including cotton, knits, polyester, nylon, sheer fabrics and denim.						
EQ100D	4	*Juki Long Arm Sewing Machine (LU-2216N-7): Long-arm, Unison-feed, Lockstitch Machine with Vertical-axis Large Hook and Automatic Thread Trimmer. Power requirement Single-phase 110~120V, 220~240V, 3-phase 200~220V, 220~240V.						
EQ101A	1	*Juki Box Stitcher (AMS-210EN): Computer-controlled Cycle Machine with Input Function. Sewing machine motor: AC servomotor 550W (direct-drive system). Power requirement / Power consumption: Single-phase, 3-phase 200~240V/450VA						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
EQ102A	8	** Thermex Thermatron RF Heat Sealer (F15-30): Output Power: 10kW – 30kW, Adjustable daylight of 7"-11", Customizable Throat Depth, Cylinders, Stroke, Frequency stabilized generator at 27.12MHz +/- .6%, RF Power Feed to assure equal voltage distribution and uniform sealing.						
EQ102B	8	Thermex Thermatron RF Heat Sealer Pedestal (M23933)						
EQ104A	1	Edward Segal Grommet Machine (92GW): Fully automatic grommet machine that pierces a hole in the material and feeds and attaches both the grommet and washer, all in a single cycle. Specifically designed for heavy duty industrial fabrics including Kevlar and Nylon. Dimensions: 36"W x 36"D x 66"H. Weight : 700 lbs. Electrical: 115 Vac, 60 Hz. Motor: 1/2 HP, 1140 RPM, Single Phase. Air: 50-60 psi; 0.2 cfm						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
EQ105A	1	**Gerber Industrial Textile CNC Cutter (Z1): Material specific optimization settings are saved for re-use time after time. Define cutting parameters such as tool pressure, vacuum levels and cutting speed on the cutter's portable workstation and easily adjust them using the touch screen directly at the cutter. With electronic pressure regulation, users are able to monitor and electronically regulate the pressure of the knife to optimize the accuracy of cut parts.						
EQ105B	1	Gerber Industrial Textile CNC Cutter Blower (Z1-15HP): 15HP,3PH,60HZ,208-230/460 VAC FAN 3450						
GQU	1	Pac Machinery Poly Bag Sealer (48PS-KN): Industrial line of high pressure pneumatically-operated thermal impulse sealers and trim sealers designed for demanding sealing applications of thick or high temperature materials. The Vertrod PS impulse bar sealer is capable of making hermetic seals with temperatures ranging from 200°F to 650°F. Open back construction allows the user to operate the machine from the front or rear of the sealer as well as providing pass-through ability for an uninterrupted flow of film. The Vertrod PS employs PAC's state of the art solid-state control circuitry along with an improved safety system.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
MS104G	22	Grainger Heavy-duty bulk rack (35UR59): Particleboard decking provides a smooth, solid surface that prevents items from falling through the racks. The decking installs over the racks' beams to distribute the weight of items placed on the decking across the beams. Overall dimensions: 6'W x 2'D x 7'-3"H, Number of Shelves 3, Load Capacity per Shelf 3,500 lb, Frame Material, Steel.						
MS104H	1	Grainger Heavy-duty bulk rack (35UR60): Particleboard decking provides a smooth, solid surface that prevents items from falling through the racks. The decking installs over the racks' beams to distribute the weight of items placed on the decking across the beams. Overall dimensions: 6'W x 3'D x 7'-3"H, Number of Shelves 3, Load Capacity per Shelf 3,500 lb, Frame Material, Steel.						
MS104K	7	Grainger Heavy-duty bulk rack (35UT09): Particleboard decking provides a smooth, solid surface that prevents items from falling through the racks. The decking installs over the racks' beams to distribute the weight of items placed on the decking across the beams. Overall dimensions: 8'W x 3'D x 7'-3"H, Number of Shelves 3, Load Capacity per Shelf 3,000 lb, Frame Material, Steel.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
MS106A	7	Global Industrial Cabinet (WBB495262): This cabinet is made of all welded, 12-gauge steel for solid, long lasting durability. A full height partition divides cabinet in half to allow safe storage for two, or to securely separate equipment for different purposes. Two independent locking handles have a three-point locking device, including a hasp built into each handle for use with a padlock. Four 14-gauge shelves per compartment adjust in 2" increments. 4 shelves on each side for a total of 8 shelves. The 7-gauge legs are welded on to provide mobility in lifting in order to move from one area to another. Available in 5 different configurations of cabinet height, shelf width and number of shelves per compartment. Dimensions: 30"W x 27 3/4"D x 59"H.						
MS106I	2	Global Industrial™ Modular Drawer Cabinet (WBB527756): All welded steel modular cabinet with 10 Drawers with dividers and Lock. Drawers open easily on side-mounted tracks that allow full-access extension, with a built-in drawer locking system to prevent accidental tipping. Each drawer has full-width handles for a flush, catch-free front with integrated label holder and plastic covers for quick identification of drawer contents. Limited 1-Year Warranty. Dimensions: 30"W x 27 3/4"D x 59"H.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
MS107C	10	Grainger Rolling Tool Cabinet (48VA11): Heavy-duty rolling tool cabinets are made of 14-gauge steel. Their maximum per-drawer load capacity is 200 lb. or less. Drawer Slide Type: Ball Bearing, Duty Rating: Heavy Duty, Aluminum Extruded Drawer Pulls, Keyed Locking System, 7 Drawers, Total Load Capacity: 3,600 lb, Total Storage Capacity: 15,390 cu in, Dimensions: Depth 25-1/4", Height 41", Width 34".						
MS108A	2	Grainger Hazardous Material Cabinet (55EA93): 30 Gallon storage capacity, keyed lock, powder coated, 18 gauge steel construction, adjustable shelf, NFPA 30 Compliant, grounding attachment, leakproof sill, red trilingual warning, Dimensions: Depth 18", Height 48", Width 43.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
MS109A	2	Global Industrial™ Single Sided Cantilever Rack Starter (WB248383L): Extra heavy duty cantilever racks offer maximum support, strength and capacity for storing long, flat items with ease. Made using 7 gauge steel uprights and 7 and 10 gauge steel arms. Single sided units can be placed up against walls. Scratch resistant gray enamel finish. Straight arms allow tool free height adjustments at 3" increments. Straight arms include 2"H retaining lip. Base can be used as bottom shelf for added storage. Includes one 48"W horizontal brace set, 2 uprights and 8 straight arms with lip. Load capacity 21,500 lbs. Dimensions:						
MS113A	2	McMaster Carr Plastic Waste Container and Lid (4052T11): Rectangular, 55 gallon.						
MS119B	2	McMaster Carr Shelving (4829T325): Heavy Duty Closed Shelving with 5 Shelves, 36" x 60" x 24" Overall Size						
SP102A	12	KH INDUSTRIES Extension Cord Reel (RTBB3LB-1DD520-J12F): Grounding Plug/Inline GFCI, NEMA 5-20P, Quad Box Receptacle, Spring Retraction, Voltage 120V AC, Retractable Cord Length 25 ft, Max. Amps 20 A, Number of Wires 3, Number of Outlets 4						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
SP102B	9	KH INDUSTRIES Extension Cord Reel (RTBB3LB-1GB520-J12K): Grounding Plug/Inline GFCI, NEMA 5-20P, Duplex Box Receptacle, Spring Retraction, Voltage 120V AC, Retractable Cord Length 50 ft, Max. Amps 20 A, Number of Wires 3, Number of Outlets 2						
SP102C	9	REELSAFE™ Compressed Air Reel (RS7650 OLP): Specifically engineered to retract the hose at an average walking speed of 2 miles per hour. Integral clutch creates a consistent retraction speed regardless of fluid or environmental temperature. Requires no field adjustment. Thru-shaft fluid path eliminates hose interference during reel rotation. 7 position hose guide arm for multiple mounting configurations. For Low Pressure Air / Water. Maximum temperature 150 °F.						
SP102D	16	ATLAS® Heavy Duty Cable Protector Ramps: Heavy duty rubber cable protectors are suitable for the protection of wires, cables, and cords in areas where heavy vehicles or constant pedestrian traffic is present. The rubber HD cable cover is manufactured with thick, commercial-grade rubber that is impact and temperature resistant for increased durability. Our selection of heavy duty rubber cable covers is suitable for indoor and outdoor usage.						

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME
DATE: OCTOBER 1, 2025

REQUEST FOR QUOTATION

PART 1: Vendor Pricing

Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.

BASIS OF DESIGN				PROPOSED ITEMS				
ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
WT100A	0	Sew Perfect Tables (M7 Professional): 1-1/2" thick baltic birch furniture grade plywood top and machine platform base both finished with a bright white commercial grade laminate. Height adjustable from 27 1/4" to 32". Overall dimensions: 20" x 48". Sewing Machine not						
WT103A	1	Grainger Workbench (35UX04): Stationary, adjustable height, powder coated steel frame with butcher-block top. Overall Load Capacity: 4,000 lbs, Dimensions: 48"W x 30"D x 34"-40"H.						
WT103C	2	Grainger Workbench (35UX07): Stationary, adjustable height, powder coated steel frame with butcher-block top. Overall Load Capacity: 4,000 lbs, Dimensions: 72"W x 36"D x 34"-40"H.						
WT103G	2	Global Industries Workbench (WB183170): Standard duty, extra long assembly workbench. Weight capacity: 2,000 lbs. Dimensions: 96"D x 30"L.						

***This item requires sole sourcing and is not subject to full and open competition. Provide specific make, model, and configuration indicated.**

****This item requires sole sourcing and is not subject to full and open competition. This item is not commercially available "Off the Shelf," and requires customized modification. See attached specification and/or manufacturer's quote indicating equipment options at the end of this package.**

PROJECT NUMBER, NAME, LOCATION: B60 PRODUCTION FACILITY REPAIRS-SIOP, PORTSMOUTH NAVAL SHIPYARD- KITTEY, ME DATE: OCTOBER 1, 2025 REQUEST FOR QUOTATION PART 1: Vendor Pricing Note: Manufacturers and products identified are a Basis of Design only and other manufacturers and products that meet specifications are permitted.	
---	--

PART 1: Vendor Pricing

BASIS OF DESIGN	PROPOSED ITEMS
-----------------	----------------

ITEM	QTY	DESCRIPTION	PHOTO or DWG	QTY	MFR/SERIES NAME or MODEL # & FEATURES	PHOTO or DWG	NET PRICE	EXT. NET PRICE
Product Total								\$ -
Freight/Delivery/Handling, if not FOB destination (% of product total)					*	0.00%	\$ -	
State Sales Tax, if applicable					*	0.00%	\$ -	
Installation (% of product total)					*	0.00%	\$ -	
Design Fee (% of product total)					*	0.00%	\$ -	
Project Mgmt Fee (% of product total)					*	0.00%	\$ -	
TOTAL								\$ -
Storage - Provide price for 30 day increment in case of unforeseen construction delays - See BVD Request for Pricing Cover Letter								
*ADJUST FORMULAS TO CALCULATE PROPOSED FEE PERCENTAGES (%)								
rev 27FEB2023								

NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND**PRELIMINARY EQUIPMENT COST SUMMARY****PROJECT: B60 PRODUCTION FACILITY REPAIRS-SIOP****LOCATION: PORTSMOUTH NAVAL SHIPYARD- KITTERY, ME****DATE: October 1, 2025**

CODE	QTY	ITEM DESCRIPTION	MANUFACTURER	UNIT COST	TOTAL
EQ100A	6	Medium Weight Sewing Machine	Juki	\$2,495.00	\$14,970.00
EQ100C	1	Light Weight Sewing Machine	Juki	\$1,328.00	\$1,328.00
EQ100D	4	Long Arm Sewing Machine	Juki	\$16,250.00	\$65,000.00
EQ101A	1	Box Stitcher	Juki	\$5,000.00	\$5,000.00
EQ102A	8	RF Heat Sealer	Thermex Thermatron	\$100,000.00	\$800,000.00
EQ102B	5	RF Heat Sealer Pedestal	Thermex Thermatron	\$15,000.00	\$75,000.00
EQ104A	1	Grommet Machine	Edward Segal or Equal	\$20,000.00	\$20,000.00
EQ105A	1	Textile CNC Cutter	Gerber Industrial	\$211,750.00	\$211,750.00
EQ105B	1	Textile CNC Cutter-Blower	Gerber Industrial or Equal	\$12,000.00	\$12,000.00
GQU	1	Poly Bag Sealer	Pac Machinery or Equal	\$26,956.00	\$26,956.00
MS104G	22	Heavy Duty Rack 6'x24'	Grainger or Equal	\$892.00	\$19,624.00
MS104H	1	Heavy Duty Rack 6'x36'	Grainger or Equal	\$1,040.00	\$1,040.00
MS104K	7	Heavy Duty Rack 8'x36'	Grainger or Equal	\$1,152.00	\$8,064.00
MS106A	7	Cabinet w/Shelves	Global Industrial or Equal	\$3,059.00	\$21,413.00
MS106I	2	Modular Drawer Cabinet	Global Industrial or Equal	\$3,950.00	\$7,900.00
MS107C	10	Rolling Tool Cabinet	Grainger or Equal	\$2,826.00	\$28,260.00
MS108A	2	Haz Mat Cabinet	Grainger or Equal	\$1,610.00	\$3,220.00
MS109A	2	Cantilever Starter Rack	Global Industrial or Equal	\$1,999.00	\$3,998.00
MS113A	2	Plastic Waste Container	McMaster Carr or Equal	\$283.00	\$566.00
MS119B	2	Closed Shelving	McMaster Carr or Equal	\$511.00	\$1,022.00
SP102A	12	25' Extension Cord Reel	KH Industries or Equal	\$1,331.00	\$15,972.00
SP102B	9	50' Extension Cord Reel	KH Industries or Equal	\$1,654.00	\$14,886.00
SP102C	9	Compressed Air Reel	ReelSafe or Equal	\$847.00	\$7,623.00
SP102D	16	Cable Protector Ramp	Atlas or Equal	\$88.00	\$1,408.00
WT100A	0	Sewing Table	Sew Perfect Tables or Equal	\$899.00	\$0.00
WT103A	1	48"x30" Workbench	Grainger or Equal	\$662.00	\$662.00
WT103C	1	72"x36" Workbench	Grainger or Equal	\$1,093.00	\$1,093.00
WT103G	2	96"x30" Workbench	Global Industrial or Equal	\$400.00	\$800.00
Equipment Product Total					\$1,369,555.00

Shipping/Freight*	6% (b,c)	\$82,173.30
Design Mgmt*	2.5% (b,c)	\$34,238.88
Project Mgmt*	2.5% (b,c)	\$34,238.88
Installation*	13% (b,c)	\$178,042.15
State Sales Tax (If Applicable)*		
Equipment Total		\$1,698,248.20
Handling and Administrative Rate (HAR) (NTE 5%)*	5% (b)	\$84,912.41
TOTAL Equipment + HAR		\$1,783,160.61
Bonding (If required by NAVFAC)*		
Equipment Option Item Award Amount		\$1,783,160.61
SIOH/Project Oversight (Proj O/S)*	0.065	\$115,905.44
TOTAL with Project Oversight (Proj O/S) if applicable		\$1,899,066.05

* **NOTE: Adjust all formulas to reflect vendor/project Fees, State Sales Tax, HAR, Bond and Project Oversight Rates.**

rev. 26SEPT2022

EQUIPMENT SPECIFICATION FOR Thermatron 15 kW Radio Frequency Dielectric Heat Sealer

1 SCOPE

- 1.1 Scope. This specification shall be used to purchase a Thermatron 15 kW Radio Frequency Dielectric Heat Sealer for use with vinyl or polyether based polyurethane material.
- 1.2 Intended Application. The sealing machine shall be capable of bonding the following areas of vinyl or polyether based polyurethane material, using optimum press pressure and conventional aluminum electrodes in four (4) seconds or less:

Total Thickness (inches)	Area (Square Inches)
0.008	20
0.016	34
0.024	42
0.040	50
0.080	60

2 APPLICABLE DOCUMENTS

- 2.1 Issues of Publications. The following documents of the issue date in effect on the date of request for proposal form a part of this specification to the extent applicable, or as specified herein. Within the specification, they shall be referred to by their basic designation only.

2.1.1 Government Publications.

Code of Federal Regulations

29 CFR 1910 – Occupational Safety and Health Standards
29 CFR 1926 – Safety and Health Regulations for Construction
40 CFR 261 – Identification and Listing of Hazardous Waste

Federal Standards

FED-STD-313D – Material Safety Data, Transportation Data, And Disposal Data For Hazardous Materials Furnished To Government Activities

(Application for copies should be addressed to Superintendent of Documents, Government Printing Office, Washington, DC 20402)

(Activities outside the federal government may obtain copies of federal specifications, standards, and commercial item descriptions as specified in the General Information section of the Index of Federal Specifications, Standards and Commercial Item Descriptions. The index is for sale on a subscription basis from the General Services Administration, Federal Supply Service, Specification Section, East 470 L'Enfant Plaza SW, Suite 8100, Washington, DC 20407.)

(Single copies of this specification, and other federal specifications, standards, and commercial item descriptions required by activities outside the federal government for bidding purposes are available without charge from the General Services Administration, Federal Supply Service, Specification Section, East 470 L'Enfant Plaza SW, Suite 8100, Washington, DC 20407.)

(Federal government activities may obtain copies of federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies. Electronic copies may be obtained from <https://assist.daps.dla.mil/>.)

- 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American National Standards institute Inc. (ANSI)

ANSI/AMT B11.19 – Performance Criteria for Safeguarding

(Application for copies should be addressed to American National Standards Institute (ANSI), 1899 L Street, NW, 11th Floor, Washington, DC 20036. Electronic copies may be obtained from <https://www.ansi.org/>.)

American Welding Society

AWS AWS-D1.1 – Structural Welding Code

(Application for copies should be addressed to American Welding Society (AWS), 8669 NW 36st, Suite 130, Miami, FL 33166. Electronic copies may be obtained from <https://www.aws.org/>.)

National Electrical Manufacturer’s Association (NEMA)

NEMA ICS 1 – Industrial Controls and Systems

NEMA MG 1 – Motors and Generators

NEMA 250 – Enclosures for Electrical Equipment

(Application for copies should be addressed to National Electrical Manufacturers Association (NEMA), 1300 N 17th St., Suite 900, Rosslyn, VA 22209. Electronic copies may be obtained from <https://www.nema.org/>.)

National Fire Protection Association (NFPA)

NFPA 70 – National Electrical Code

NFPA 79 – Electrical Standards for Industrial Equipment

(Application for copies should be addressed to National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02169-7474. Electronic copies may be obtained from <https://www.nfpa.org/>.)

- 2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3 REQUIREMENTS

- 3.1 General Description of System. This specification shall be used to purchase a Theratron 15 kW Radio Frequency Dielectric Heat Sealer for use with vinyl or polyether based polyurethane material. The equipment shall also include the verification of operation of the equipment by the manufacturer.

- 3.2 General Equipment Requirements. All materials and parts comprising the system shall be new, of current design and manufacture, and shall not have been in prior service except as required for factory testing. Standard, off the shelf components with proven reliability shall be used wherever possible to increase performance, reliability and cost. The equipment shall be one of the manufacturer’s current production

models which, on the day this solicitation is issued, has been designed, engineered and sold, or is being offered for sale through advertisements or manufacturer's published catalogs or brochures. Products such as prototype unit, preproduction model, or experimental unit do not qualify as meeting this requirement. The equipment shall be complete, so that when connected to the utilities identified herein, it can be used for the function for which it is designed and constructed.

- 3.3 Operating Environment. The proposed system will be operated in a heavy industrial environment and shall be capable of continuous operation over an extended period of time with minimal maintenance and upkeep. The equipment shall be suitable for operation in an indoor industrial environment, at variable ambient temperatures of 50°F to 90°F, with high humidity.
- 3.4 Electrical. All electrical equipment shall conform to the appropriate standards listed in Section 2 of this document, as well as industry accepted norms.
 - 3.4.1 Source. The equipment delivered and all accessory parts shall operate from a single source of primary power.
 - 3.4.2 Grounding. All exposed, non-current carrying metal parts on the equipment shall be maintained at common, zero ground potential. Grounding shall conform to the applicable articles in NFPA 70 and 79.
 - 3.4.3 Overcurrent Protection. Shall conform to the applicable articles in NFPA 70 and 79.
 - 3.4.4 NRTL Approval. The control system shall be housed in a NEMA rated electrical enclosure that is NRTL approved per OSHA 29CFR1910. A standard NRTL field evaluation is allowed for approval.
 - 3.4.5 Energy Isolating Devices. Equipment provided by the contract shall provide energy isolating devices (e.g. safety switches, valves, etc.), to protect personnel from hazardous energy. The devices shall be designed and manufactured such that the device can be locked in the user selected position (ON/OFF) to prevent inadvertent or unauthorized change. The contractor shall ensure that all energy isolating devices installed or modified are capable of being locked. This includes both mechanical and electrical devices.
- 3.5 Motors. The motors shall conform to the appropriate standards listed in Section 2 of this document, as well as industry accepted norms. The intended application for this equipment shall be evaluated to determine the required motor type, along with the requirements below. Servomotors are servomechanisms and shall not be required to be in accordance with NEMA MG-1.
 - 3.5.1 Enclosures. All electric motors shall be the totally enclosed, fan cooled style
 - 3.5.2 Mountings. The motor shall be mounted for vibration isolation.
 - 3.5.3 Duty Cycle. The motor shall have a duty cycle that is appropriate for the intended application and usage.
 - 3.5.4 Efficiency. The motor shall be a premium efficiency motor for energy efficiency.
 - 3.5.5 Bearings. The motor bearings shall be of the sealed for life and permanently lubricated type. Unnecessary grease fittings or plug holes shall be removed. The bearings shall provide the proper lubrication to support intermittent use and long-term storage.
 - 3.5.6 Motor Controller. The motor controller shall be designed to allow for a reduced voltage or soft start, at less than full load current to reduce the electric current surge of the motor during start-up.

- 3.6 Personnel Safety and Health Requirements. All machine parts, components, mechanisms, and assemblies furnished on the unit shall comply with all specific requirements of “OSHA Safety and Health Standard (29CFR1910), General Industry”, ANSI/AMT B11.19, ANSI/AMT B11.22, and ANSI/AMT B11.23, and ANSI/AMT B20.1 that are applicable to the equipment itself. Covers, platforms, guard rails, belt guards, and safety devices shall be provided for all parts of the equipment that present a safety hazard. The safety devices shall not interfere with the operation or maintenance of the equipment. The safety devices shall be removable to facilitate inspection, maintenance, and repair of the part. Additional safety and health requirements shall be as specified in other paragraphs of this specification.
- 3.7 Material Safety Data Sheets (MSDS). Offeror's and contractors are required to submit Material Safety Data Sheets (MSDS's) whenever the supplies being acquired or supplies used during performance are identified as hazardous materials. Hazardous Materials shall include any material which, by virtue of its potentially dangerous nature (e.g., toxic, flammable, corrosive, oxidizing, irritating, sensitizing, reactive), requires controls in its use, packaging, handling, storage, or stowage, to assure adequate safety to life and property. This definition is intended to apply to proprietary industrial, commercial, or locally prepared blends, mixtures, formulations, or compounds of gases, liquids, and solids intended for use at the job site. Any other material that has been designated by a Government technical representative as potentially hazardous and requiring safety controls shall also be supplied with a MSDS. MSDS's are to be available at work sites where materials are being used.
- 3.8 Audible Noise Levels. During normal operation, the equipment shall not produce noise levels greater than 84 dB(A) at the hearing zone of the operator's work position (In this case "hearing zone" is defined as a sphere within a two foot diameter surrounding the head) nor at any other point at a distance of three (3) feet from the equipment, as measured on the "A" weighted scale of a calibrated Type II or better sound level meter at slow response under all operating and service conditions.
- 3.9 Environmental Protection. The unit shall be designed and constructed so that during operation, service, transportation and storage conditions described herein, including final disposal, the equipment will comply with all applicable Environmental Protection Agency (EPA) and Occupational Safety and Health Agency (OSHA) restrictions for materials classified as hazardous to the environment in effect on the date of the contract. The equipment described herein shall not contain or emit material hazardous to the ecological system as prescribed by federal, state, and local statutes in effect at the point of installation.
- 3.10 Hazardous Material Exclusions. Supplies being used in the performance of this contract, or materials being provided as part of the equipment shall be free of known hazardous materials. Definitions of hazardous materials are specified in the latest version, including revisions adopted during the term of the contract, of Federal Standard No. 313. Notwithstanding any other hazardous material usage permitted in this contract, radioactive materials or instruments capable of producing ionizing radiation as well as materials which contain asbestos, mercury, cadmium, lithium, methylene chloride, lead ($\geq 0.06\%$), or polychlorinated biphenyls (PCB's) are prohibited.
- 3.11 Painting. The exterior and interior of all enclosures, and all components, shall be painted or fabricated of materials which are corrosion resistant. The painting may be in accordance with the manufacturer's standard practice provided it results in a highly wear resistant finish which ensures continued protection against the shipyard's salt water marine operating environment under all service conditions. Prior to painting, surfaces shall be properly cleaned, prepared and primed. Lead base or chromium base paints are prohibited.
- 3.12 Caution - Warning Plates. Corrosion resistant “Caution” or “Warning” plates or labels shall be securely attached to the equipment in visible locations, with any safety precautions to be observed by the operator or maintenance personnel permanently marked on the plates.

- 3.13 Identification Plate. An identification plate shall be furnished with the equipment. A nameplate shall be affixed to each major component of the system showing the manufacturer's name, equipment model, year of manufacture, amp rating of largest motor, and any other pertinent information for identifying the part as a unique component of the system.
- 3.14 Equipment weight. The total weight of the unit shall be stenciled on each side of the unit with 2" high lettering with a contrasting paint (yellow unacceptable).
- 3.15 Handling Devices. This equipment does not require permanent lifting and handling fixtures and devices.
- 3.16 Specific Characteristics for Equipment and Services to be Provided. The equipment specified herein shall include, but is not limited to the following components, attachments, and accessories.
- 3.16.1 Utilities. The equipment shall be designed and constructed to be complete for operation on following available utilities:
- Electric: Single Service, 220 volts ($\pm 10\%$), 3 phase, 60 Hertz
Compressed Air: 100 PSI, unregulated
- 3.16.2 Condition Upon Receipt – The equipment shall be shipped and arrive in one piece, totally fabricated, completely wired and painted. The equipment shall be capable of being off loaded from the delivery truck by a fork lift.
- 3.16.3 Performance Characteristics.

The equipment shall have the performance characteristics listed in Table (1).

Table (1) Characteristics and Performance

<u>CHARACTERISTIC</u>	<u>VALUE</u>
Output	15-kW
Bedplate Size	30" x 36"
Upper Platen	24" x 24"
Shielding	1 mw/cm ²

- 3.16.4 General. The equipment shall be a Theratron 15 kW Radio Frequency Dielectric Heat Sealer. No equivalents will be accepted.
- 3.16.5 Structural. The equipment shall be able to be moved through a doorway measuring 78 inches in height, and 66.5 inches wide without disassembling the product beyond that which is expected for installation by the customer.
- 3.16.6 Mechanical. The machine will be installed on a shop floor, amidst a busy work area. There shall be a silencer on the exhaust for a noise free operation.
- 3.16.7 Control System.
- 3.16.7.1 Remote Pedestal. The sealing machine shall be equipped with a remotely operated pedestal control system with all necessary operator controls accessible. Emergency stop controls shall be provided to stop the machine at any point in the cycle, shut off RF energy, and return the upper electrode to the up position. The operator shall not be allowed within the RF area to start or stop the RF cycle.

- 3.16.7.2 Press operation. Using the controls on the pedestal, the operator shall be able to lower the press into position. The press shall be lowered onto the die, and full pressure shall be applied. The operator shall be able to remove their hands from the lowering controls in order to check the work piece and die. At this time the platens shall not be energized, and the RF cycle will not be automatically started. There shall be no danger to the operator with their hands at the work piece. Once the operator has removed themselves from the RF area, the operator shall initiate the energization of the platens, and start the RF cycle by actuating a start button. Once started the timing system shall automatically complete the cycle.
- 3.16.7.3 Control circuit test switch. There shall be a RF on/off switch to allow press adjustment to be made with RF power switched off.
- 3.16.7.4 Air actuated remote control. Once the platen is lowered and full pressure is applied, the operator shall be able to be clear from the space where the RF energy is present and actuate an air actuated foot pedal in order to initiate the platen energization, and RF cycle. There shall be no carryover of the RF energy to the remote used controls.
- 3.16.7.5 Indicators. There shall be a power ON indicator light to show the blower and safety circuits are operational. There shall be a energization ON light to show that the platens are energized. There shall be an RF ON indicator light to show the RF cycle has started. There shall be an arc suppressor indicator light to alert when the suppressor fires. There shall be a plate overload indicator light.
- 3.16.8 Training. No training is required, as this equipment is currently in use in the shop.
- 3.16.9 Maintenance. The equipment shall be easy to maintain. The user shall be able to perform the daily/weekly/monthly user level maintenance without lockout tag out capability.
- 3.17 Responsibility for Installation and Verification
- 3.17.1 Equipment installation. The equipment shall be considered the property of the Government upon arrival. The Contractor shall be responsible for the internal equipment assembly and final operation verification.
- 3.17.2 Government responsibilities. The Government shall be responsible for the following parts of the installation.
- Equipment Receipt
 - Setting the equipment on the foundation
 - Lagging the equipment (if necessary)
 - Rigging of equipment parts into place
- 3.17.3 Contractor responsibilities. The Contractor shall be responsible for the following.
- Directing the assembly process, as required.
 - Completing the assembly of the equipment.
 - Completing the assembly of all connections within the equipment.
 - Verifying equipment operation.
 - The contractor shall be responsible to furnish all tools and equipment required to install, level and align the machine and perform the tests at destination specified in this specification. Special equipment, measuring equipment, and machine alignment equipment etc., required by the contractor to align the machine. The Government shall furnish no tools or equipment.

3.18 Technical Data to be Provided.

- 3.18.1 Data required for review. All the performance characteristics identified and requirements specified in section 3.0, following sections and in the list below shall be provided for technical review.
- Shipping information to verify size.
 - A picture or drawing showing a similar unit
 - Footprint Area
 - Working Area
 - Electrical Requirements of all equipment. Including, HP and FLA to size CB
 - Approximate Time to Deliver
 - Description of Operator Control Panel
 - Controller and software description
- 3.18.2 Requirements for technical proposals. Offerors shall submit, technical proposals written in the English language with the data requested. The proposal shall enable government personnel to make a thorough evaluation and determination as to whether or not the proposed equipment fully meets the requirements of the solicitation. To this end, each proposal shall be as specific, detailed and complete as to demonstrate that the offeror has a thorough knowledge and understanding of the requirements. Statements that paraphrase the specifications or attest that "standard procedures will be employed", etc., are inadequate. Each proposal must be sufficiently adequate to demonstrate full compliance with the technical requirements of the specifications. Failure to comply with these instructions may result in rejection of an offer.
- 3.18.3 Operator / Maintenance Manuals. The contractor shall supply and deliver with the machine manuals, drawings, and schematics on CD-Rom and three (3) original hard copies each of "as built" standard manuals written in English language containing all necessary electrical wiring diagrams (drawn according to NFPA standards), hydraulic schematic diagrams, operator's manuals, parts lists, preventive maintenance instructions, part programming manuals (if applicable), and drawings of machine components, and all other instructions for operation and maintenance of the machine and its peripheral equipment
- a) Schematic piping and wiring diagrams
 - b) Start-up procedure
 - c) Shutdown procedure
 - d) Emergency procedures
 - e) Maintenance procedures
 - f) All instructions and illustrations necessary for proper operation of the equipment.
 - g) Instructions, diagrams, and electrical/electronic schematics required to troubleshoot and repair the unit in the event of malfunction or breakdown.
 - h) Complete parts list(s) cross indexed to indicate part application by circuit symbol. Procurement information shall be provided for all replacement components.
- 3.18.4 NRTL compliance certification. The contractor shall provide signed, written certification of compliance of an NRTL approved electrical enclosure, as required in section 3. Failure to provide this certification will delay acceptance of the equipment, and could result in rejection for failure to comply with the terms of the contract.
- 3.18.5 Warranty. Supplies and services furnished shall be covered by warranty from defects in design, materials and workmanship. The warranty shall be the manufacturer's standard commercial warranty which shall conform to all requirements of the contract. Acceptance of the manufacturer's standard commercial warranty shall not minimize the rights of the government under clauses in the contract,

and in any conflict that arises between the terms and conditions of the contract and manufacturer's warranty, the terms and conditions of the contract shall take precedence. The warranty period shall commence from the date of acceptance.

4 QUALITY ASSURANCE PROVISIONS

- 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.
- 4.2 Acceptance Testing at Destination. The equipment shall be supplied FOB Destination (Portsmouth Naval Shipyard). Upon receipt, the equipment shall be inspected for shipping damage, verification of quantities, mechanical and electrical integrity, and the requirements of section 3. Within fifteen (15) days of delivery, the equipment will be connected to the appropriate utilities, and operated to sufficiently demonstrate conformance to the requirements of the specification. Any discrepancies on any item of equipment supplied shall be promptly corrected by the manufacturer at no cost to the government.
- 4.2.1 In Service Testing. Upon completion of installation at the receiving activity, the equipment shall be placed in service, in the actual application, for a period of two (2) weeks. This test shall be used to demonstrate reliable operation and performance.
- 4.3 Final Acceptance – Upon satisfactory completion of inspection and test of the equipment, the authorized Government Representative (Portsmouth Naval Shipyard) will sign and forward the acceptance document(s) to the paying office.

5 PACKAGING

- 5.1 Special Delivery Instructions. The contractor shall notify the receiving activity of the scheduled arrival date of the equipment and any special handling requirements. Notification shall be made not less than 72 hours prior to the delivery date. This notification is necessary to ensure off-loading services are arranged. If proper notification is not given, the Government will not be responsible for any delays and expenses caused by the inability to off-load the supplies upon delivery. Portsmouth Naval Shipyard will not accept deliveries after 1500 hours Monday through Friday. No deliveries will be accepted on Saturday or Sunday.

US260752
PORTSMOUTH NAVAL SHIPYARD
BLDG M 1/3 CODE 981
KITTERY, ME. 03904
United States

Commercial offer reference :
Z1 Long 1.8 wide cutter

00156855

Commercial offer date : 02/24/2025
Valid until : 03/24/2025

FINANCIAL SUMMARY	
SOLUTION	Price (excluding tax) (USD)
Systems: Software, Hardware, Installation	178,270.32
Professional Services: Consulting, Implementation, Training	9,670.00
Z1 w/ Vision Prime V2 Extensive+ Service Contract	9600.00
TOTAL SOLUTION	\$197,540.32

ANNUAL SERVICE FEES	Price for 1st year (excluding tax) USD	Price for 2nd year (excluding tax) USD	Price for each following year (excluding tax) * USD
Power Maintenance Services	9,600.00 (*)	18,700.00 (*)	18,700.00 (*)
TOTAL ANNUAL SERVICE FEES	9,600.00		

* The annual subscription fee will be revised at the subscription anniversary date according to the provisions of the General Terms And Conditions.

Once signed by the relevant parties, this Purchase Order shall be concluded in accordance with, and governed by, the terms of Contract No. **00156855**

SOLUTION DETAILS				
Product Description	Reference	Unit Price USD	Qty	Total Price USD
Equipment				
Z1 1.8 with Long Cut Window (10', 3 m)	Z1-1-8-LONG-CUT-WINDOW	188,100.00	1	188,100.00
Installation and on-site services				
Installation of all Gerber Single-Ply cutters to all customers. Duration of 3 days.	GT-IN-SPC	4,900.00	1	4,900.00
Consumables and Parts				
Tangential knife blade, 30 degrees, 0.040" thick (10-pack)	SINGLE_PLY_TANG_30DEG_040	114.00	1	114.00
Tangential knife blade, 45 degrees, 0.040" thick (10-pack)	SINGLE_PLY_TANG_45DEG_040	122.00	1	122.00
Wheel Blades (10-pack)	SINGLE_PLY_WHEEL_BLADE	22.000	5	110.00

Consulting and Implementation				
Associate level activities: for Single-Ply cutters, standard training, onsite support, documentation. Price per day.	GT-ASSOCIATE-SPC	1,590.00	3	4,770.00
Travel time for ressources	GT-OFFSET	800.00	1	800.00
Other Services				
CIP Shipment Fuel Surcharge	GT-FREIGHT	2,000.00	1	2,000.00
Travel Expenses	GT-TRAVEL	350.00	6	2,100.00
Z1 w/ Vision Prime V2 Extensive+ Service Contract		9600.00	1	9600.00
Total Price:				212616.00
Discount:				15,075.68
Total Price (excluding tax):				\$197,540.32

Payment Terms

Deposit:

50% with Signed Purchase Agreement
50% Net 30 Days from shipping document

USD upon signing the contract worth Initial Order or acceptance of the Purchase Order in case of Additional Purchase

Estimated Delivery :

To be confirmed upon receipt of signed contract (or Purchase Order in case of Additional Purchase) and deposit.

Installation time or date :

To be confirmed on delivery

Equipment Warranty :

Lectra equipment includes a 12 months warranty from the Customer on-site delivery date, and 14 month (at the latest) warranty from the date-of-shipment (from the facilities of the production plant).

Incoterm (*) :

** As defined by the International Chamber of Commerce*

CPT Kittery, ME.

Handling and unloading :

At the customer's expense.

Comments :

Voltage 208 single Vacuum power 208 3phase

Customer is hereby informed that Lectra software programs may be provided with digital management system(s) and that such device is not meant to alter the duration of the rights granted to the customer under the license agreement.

Ship To :

US260752
PORTSMOUTH NAVAL SHIPYARD
BLDG M 1/3 CODE 981
KITTERY, ME 03904
United States

Bill To :

US260752
PORTSMOUTH NAVAL SHIPYARD
BLDG M 1/3 CODE 981
KITTERY, ME. 03904ME
United States

ANNUAL SERVICE FEES DETAILS				
Product Description	Reference	Unit Price (USD)	Qty	Total Price (USD)
Power Maintenance Services				
Z1 w/ Vision Prime V2 Extensive+ Service Contract	Z1-V-PEX-I	18,700.00	1	18,700.00
Z1 w/ Vision Prime V2 Extensive+ Warranty CREDIT	Z1-V-PEX-I-WCDT	-9,100.00	1	-9,100.00
Total Price:		9,600.00		

Annual payment according to the provisions of the General Terms And Conditions.

Payment Terms

Ship To :

US260752
PORTSMOUTH NAVAL SHIPYARD
BLDG M 1/3 CODE 981
KITTERY ME. 03904
United States

Bill To :

US260752
PORTSMOUTH NAVAL SHIPYARD
BLDG M 1/3 CODE 981
KITTERY, ME. 03904
United States

Client Service Center:

- ☐ Atlanta
- ☒ Local technical support

Document title :	PORTSMOUTH NAVAL SHIPYARD - KITTERY - Fabric Single Ply (DCS, Z1)
Agreement# :	00156855
Prepared by Name :	Raymond Perugini
Prepared by Position :	Industrial Account Manager
Prepared for :	Christine ouellette
Prepared for Position:	Engineering
Account Information name :	PORTSMOUTH NAVAL SHIPYARD
Native Account Name :	
Account Information Address :	BLDG M 1/3 CODE 981 York KITTERY 03904 ME United States