



GENERAL NOTES:
1. THIS DRAWING WAS DEVELOPED TO PROVIDE FABRICATION OF CV CAMEL OF CFAY OPS.
2. WELDING AND INSPECTION SHALL BE IN ACCORDANCE WITH NAVSHIPS 0900-014-5010.
3. ALL SHARP OR RAGGED EDGES SHALL BE GROUND SMOOTH IN ORDER TO PREVENT INJURY TO PERSONNEL.
4. BUTTS IN PLATING MAY BE VARIED TO SUIT INSTALLATION AND AVAILABLE MATERIAL.
5. FRAME SPACE IS 30 INCHES THROUGHOUT.
6. MOLDED LINES SHALL BE AS FOLLOWS.
(A) TRANSVERSE MEMBERS.
THE SIDE OF PLATE OR WEB FACING MIDSHIP.
(B) LONGITUDINAL MEMBERS.
THE SIDE OF PLATE OR WEB FACING MIDSHIP.
(C) SHELL PLATING.
INBORD FACE OF PLATING.
7. PAINT SHALL BE IN ACCORDANCE WITH TABLE OF PAINT SYSTEM ON THIS DRAWING (SHEET 3 OF 3) AND NAVSEA S9086-VD-STM-000, CHAPTER 631.
8. ALL CONSTRUCTION SNIPES SHALL BE 1x1 UNLESS OTHERWISE SHOWN OR NOTED.
9. UPON COMPLETION OF WORK, ALL (6) TANKS SHALL BE GIVEN AN AIR COMPLETION TEST OF TWO (2) P.S.I. WITH ZERO PRESSURE DROP IN TEN (10) MINUTES IN ACCORDANCE WITH SECTION 192 OF NAVSEA S9AAO-AB-GOS-0107G50.


LIST OF MATERIAL (QUANTITY FOR ONE SHIP)														
S/A NO.	ITEM NO.	QTY REQD	DESCRIPTION	LAST NO USED	SIZE REQD	MTL SPEC	MTL REQ	NSN OR MFR PT NO.	SCE	APL	NO.	UNIT WT	REMARKS	
	1	15 ⁰⁰	10.2 * PLATE			MIL-S-2269B	STL					10.2 ⁰⁰ /FT		
	2	8800 ⁰⁰	15.3 * PLATE									15.3 ⁰⁰ /FT		
	3	960 ⁰⁰	6 x 4 x 11 * T									11 ⁰⁰ /FT		
	4	4200 ⁰⁰	4 x 3 x 3/8 L			QQ-S-741						8.5 ⁰⁰ /FT		
	5	480 ⁰⁰	6 x 6 x 3/8 L									14.9 ⁰⁰ /FT		
	6	600 ⁰⁰	6 x 4 x 1/2 L									16.2 ⁰⁰ /FT		
	7	450 ⁰⁰	4 x 3/8 FB									5.1 ⁰⁰ /FT		
	8	108 ⁰⁰	4 x 1/2 FB									6.8 ⁰⁰ /FT		
	9	54 ⁰⁰	5/8 DIA ROUND BAR					TYPE-STIRRUP				1.043 ⁰⁰ /FT	SEE REF # 1	
	10	6	SOUNDING CONNECTION			—	VARIOUS	TYPE-A				—	SEE REF # 3	
	11	6	PLATE MANHOLE 15 x 23			—						—	SEE REF # 4	
	12	256	1 1/2 - 6 UNC HEX HD BOLT			MIL-S-1222	STL					—		
	13	256	1 1/2 - 6 UNC HEX HD NUT									—		
	14	512	FLAT WASHER, 1 1/2 BOLT SIZE			FF-W-92						—		
	15	256 ⁰⁰	RUBBER FENDER, 15 3/4 x 15 3/4 x 7 1/8 BORE			COML	RUBBER	DC-TYPE (TYPE-A)				—	SHIBATA INDL CO, LTD	
	16	28	ZINC ANODE.			MIL-A-18001	ZINC	TYPE-ZHC				235 ⁰⁰ %	SEE REF # 2	

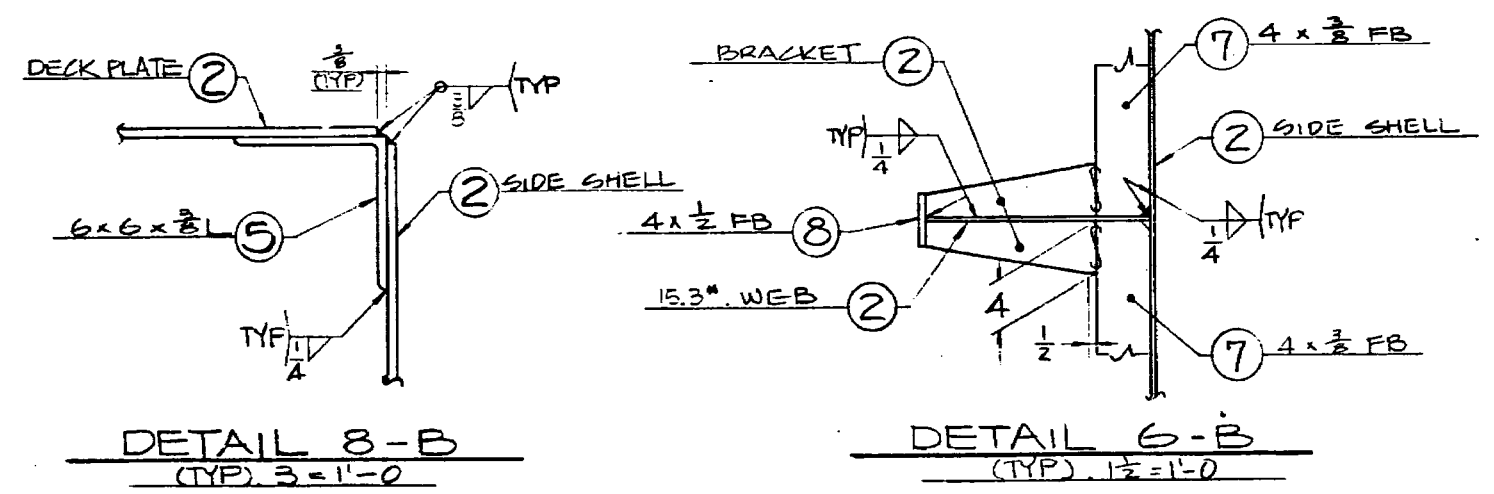

DETAIL 6-B
(TYP) 1 1/2 = 1'-0

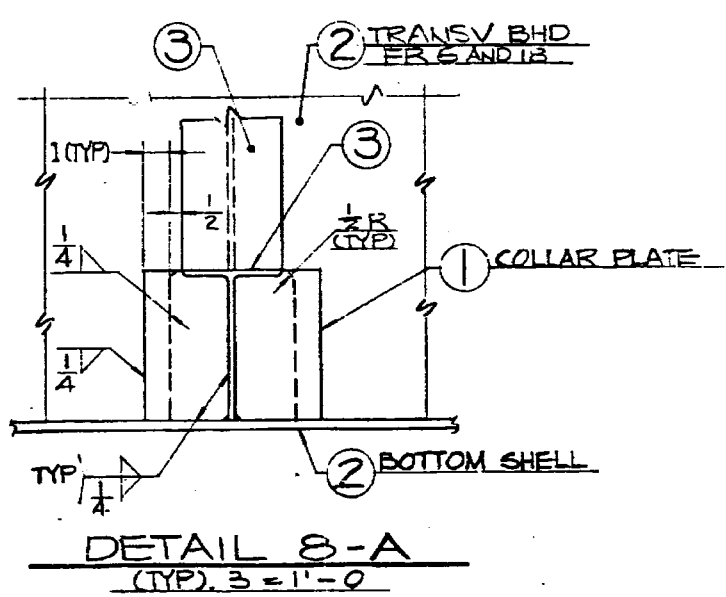

DETAIL 8-A
(TYP) 3=1'-0

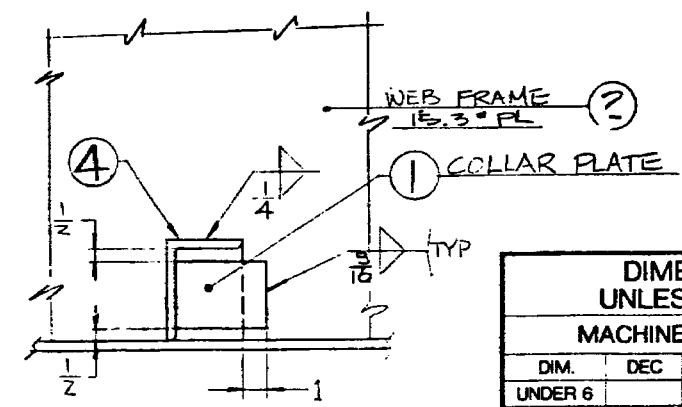

DETAIL 6-A
(TYP) 3=1'-0

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED					
MACHINED			GEOMETRIC (WHERE IND)		
DIM.	DEC	FRAC	SYM	GEOMETRY	TOL
UNDER 6		± 1/16	—	FLAT & STR	/IN
6 TO 24		± 1/16	⊥	PERPENDICULAR	/IN
OVER 24		± 1/16	—	PARALLELISM	/IN
DIM ARE IN INCHES			⊙	CONCENTRICITY	/IN
FILLETS & RADII TO BE			SYM IN ACCORDANCE WITH		
TOL ON ANGLES ±					

NO	HULL	TITLE	IDENT
4		FLUSH WT. OT. BOLDED PLATE MANHOLE	805-1626726
3		DK PL FOR SOUNDING & FILLING CONNECTION	810-1385848
2		CATHODIC PROTECTION HULL ZINC ANODE	803-921865
1		STD LADDER, VERTICAL ASSEMBLIES & DETAIL	51604-860091

REFERENCES

CONTRACT NO.
FROM NO.
U.S. NAVAL SHIP REPAIR FACILITY,
YOKOSUKA, JAPAN
P.O. SEATTLE, WA 98162-1400

PREPARED K. USUI DATE 4/22/81
CHECKED J. A. 4/27/81
ENGINEER
APPROVED P. L. 4/27/81
AUTHORITY:

WEIGHT CONTROL DATA									
SHIPALT	WT	WT	WT	WT	WT	WT	WT	WT	WT
NUMBER	GR	(LBS)	OR	REF BL	REF CL	REF CL	REF CL	REF CL	REF CL

LEVERS IN FEET TO THE NEAREST TENTH OF A FOOT
USE SEPARATE LINES FOR EACH WT GRP. S/A REV. WT INSTL. WT RMV
I=INSTALL R=REMOVE XI=LOAD ITEM INSTALLED XR=LOAD ITEM REMOVED
F=PWD A=AFT P=PORT S=STBD O=C

DEPARTMENT OF THE NAVY
NAVAL SEA SYSTEM COMMAND
WASHINGTON D.C. 20362

**OPS CV CAMEL
HULL STRUCTURE**

OPS CV CAMEL HULL STRUCT
SIZE FROM NO. WT GRP. NAVSEA DRAWING NO. REV
F 53711 — **SRF-11928-87** —
SCALE: AS NOTED SHEET 1 OF 3

PRINT ISSUE RECORD

S/A	JOB ORDER NO.	VESSEL	DATE AND NAME	PORTS	SHIPYARDS	NAVAL	NAVSEA	SHREAC	SUBIC	GUAM

OPS 2
SHIP
S.S.
211
212
213
230
239
231
245.3
250

72
71
68C
67F
67X
58
511C
51E
41
38M
38E
31
28
23M
17
11

TOTAL 6

