
OB100 - <offline>

"COMPLETE RESTART" Complete Restart
Name: **Family:**
Author: TOUZERY **Version:** 0.1
Block version: 2
Time stamp Code: 10/13/2010 10:44:12 AM
Interface: 02/15/1996 04:51:10 PM
Lengths (block/logic/data): 00318 00118 00020


Name	Data Type	Address	Comment
TEMP		0.0	
OB100_EV_CLASS	Byte	0.0	16#13, Event class 1, Entering event state, Event logged in diagnostic buffer
OB100_STRTUP	Byte	1.0	16#81/82/83/84 Method of startup
OB100_PRIORITY	Byte	2.0	Priority of OB Execution
OB100_OB_NUMBR	Byte	3.0	100 (Organization block 100, OB100)
OB100_RESERVED_1	Byte	4.0	Reserved for system
OB100_RESERVED_2	Byte	5.0	Reserved for system
OB100_STOP	Word	6.0	Event that caused CPU to stop (16#4xxx)
OB100_STRT_INFO	DWord	8.0	Information on how system started
OB100_DATE_TIME	Date_And_Time	12.0	Date and time OB100 started

Block: OB100 "Complete Restart"


Network: 1 Bit toujours à zéro (ALW_OFF)

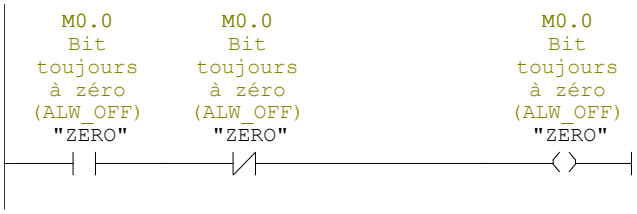

Network: 2 Bit toujours à un (ALW_ON)

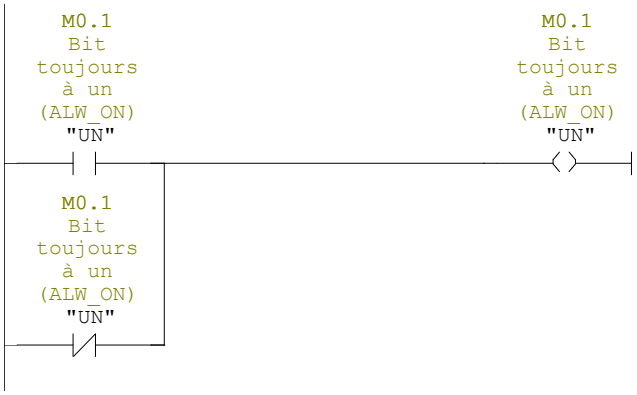

Network: 3 SET premiers cycles OB1 et OB35

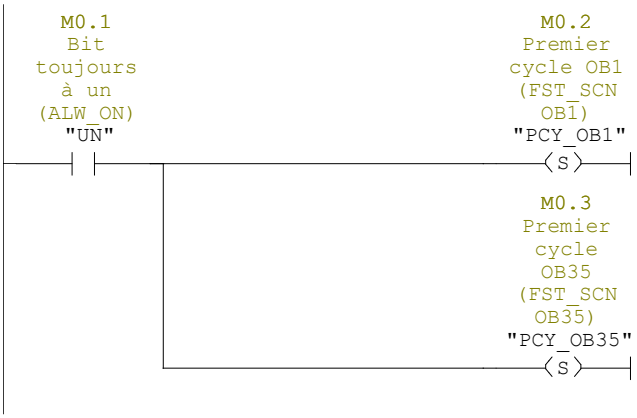

Network: 4 Init : DB255 Données Communication Ethernet TCP

```
      L     0
      T     DB255.DBW    0
      T     "COM_TCP".RW_code_erreur      DB255.DBW2         -- Codes des errreurs de la fonction R/W
      T     "COM_TCP".RW_validation_db    DB255.DBW4         -- Indique si le numéro de db est valide, e
                                                               rroné ou inexsistant
      T     "COM_TCP".RW_db_lenght        DB255.DBW6         -- Variables sortie de la fonction système
                                                               TEST_DB SFC24
      T     "COM_TCP".MOVE_TEMPS_SYNCHRO  DB255.DBW8         -- Temps attente SYNCHRO TCP "RAPIDES" (en
                                                               ms)
      T     "COM_TCP".CPT_DDE_RAP         DB255.DBW10        -- Compteur des demandes d'acquisitions des
                                                                données "RAPIDES"
      T     "COM_TCP".CPT_DDE_LEN         DB255.DBW12        -- Compteur des demandes d'acquisitions des
                                                                données "LENTES"
```

Network: 5 Raz bit de controle des sorties

