


1	3 pcs Resistor 10k 1%	2	1 pc Resistor 68k 1%	3	1 pc Resistor 680R 1%
4	3 pcs Button	5	1 pc DIL-8 Socket	6	1 pc CR3202 Battery Holder
				 MOUNT ON BOTTOM SIDE!	
7	1 pc SSD1306 I ² C OLED 0.96"	8	1 pc LED 2mA	9	1 pc Slider Switch SS12F23
10	1 pc ATTINY85	TOOL Programmer USBasp		11	1 pc 3V Battery C2032
12	1 pc Passive Buzzer	Material Solder			
 MOUNT AFTER PROGRAMMING!					



COLOR	1 ST BAND	2 ND BAND	3 RD BAND	MULTIPLIER	TOLERANCE
Black	0	0	0	1Ω	
Brown	1	1	1	10Ω	± 1% (F)
Red	2	2	2	100Ω	± 2% (G)
Orange	3	3	3	1KΩ	
Yellow	4	4	4	10KΩ	
Green	5	5	5	100KΩ	± 0.5% (D)
Blue	6	6	6	1MΩ	± 0.25% (C)
Violet	7	7	7	10MΩ	± 0.10% (B)
Grey	8	8	8	100MΩ	± 0.05%
White	9	9	9	1GΩ	
Gold				0.1Ω	± 5% (J)
Silver				0.01Ω	± 10% (K)

5-Band-Code 237 Ω ± 1%

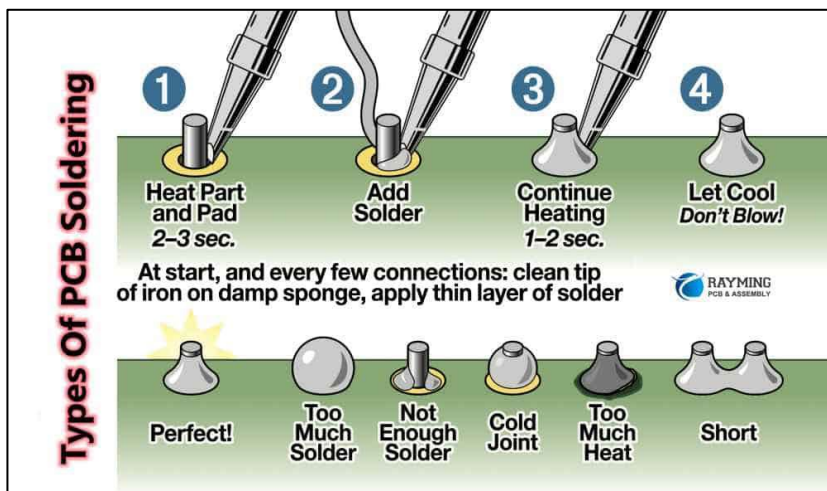