
HLB-A1 · F · age not recorded · position A1 · tether arm A

allego_0__uid0806-12-45-02

post-surgery day not recorded · day 7 post-tether · body weight not recorded · 3.18 h · ZT 3.8 to 6.9 · criterion HUM · QC epoch 10 s

LIFE TIMELINE

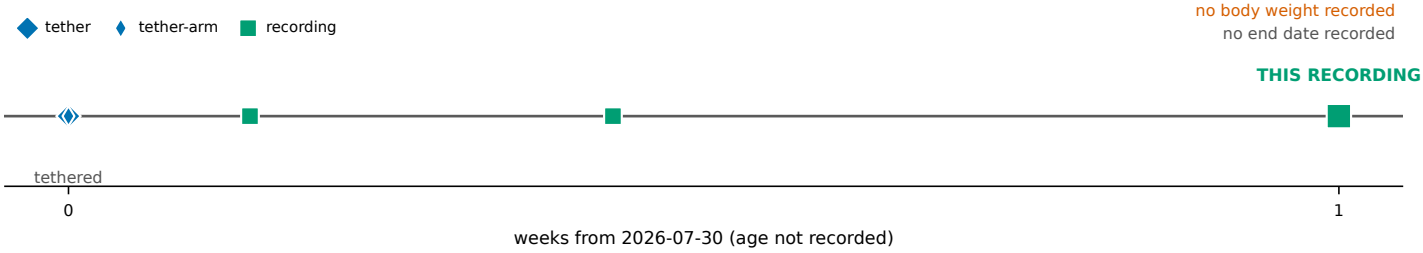

VERDICT LADDER

✓ 0 FILE — PASS

Is the recording file physically sound?

11,444,224 samples, 3.18 h

vs data samples == timestamp samples, remainder 0

11,444,224 data samples = 11,444,224 timestamp samples, remainder 0 and 0

✓ 1 IDENTITY — PASS

Which native channels belong to this animal?

EEG A/1 EMG A/2

vs layout derived from the file, never assumed

2 channels resolved from sensors_by_port; 112 wire-free inputs available as an in-file floor

✗ 2 CONNECTION — FAIL

Is the electrode connected, judged against wire-free inputs in the same file?

0.0% usable, longest unbroken block 0.0 min

vs 60 Hz < 410.7 uV (p1 of 112 wire-free inputs in this file), rms 10-150 uV, zero railed samples

no epoch passes on every role; weakest is EEG at 0.0%

– 3 SCOREABILITY — BLOCKED

Can the sleep question even be asked?

rung 2 CONNECTION did not pass

– 4 ARCHITECTURE — BLOCKED

What did the animal do?

rung 3 SCOREABILITY did not pass


– 5 EXPORT — BLOCKED

Can a human check us?

rung 3 SCOREABILITY did not pass

A rung is not evaluated if the rung below it failed: it reads BLOCKED. ? INSUFFICIENT means the question could not be asked, which is NOT the same as ✗ FAIL.

RUNG 2 evidence — usable epochs against the in-file wire-free floor

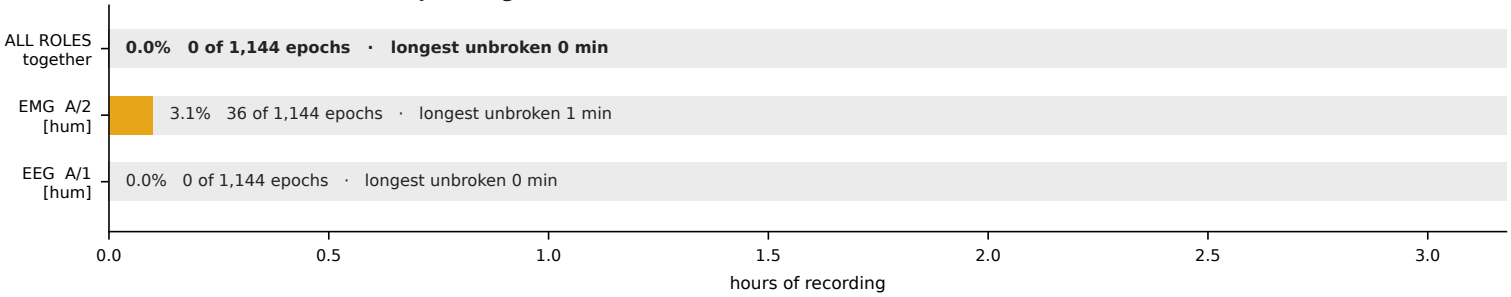

falsification: the same criterion scores the 112 wire-free inputs in this file at 0.00% usable, and must be near zero · floor 60 Hz p1 411 uV, 1-40 Hz slope p1 -1.06

– RUNG 4 ARCHITECTURE: BLOCKED

rung 3 SCOREABILITY did not pass

NO PANEL IS DRAWN FOR A RUNG THAT DID NOT PASS.

The most electrically stable channel on the rig, five sweeps across five days all below 0.35 MOhm, and still only 5 to 7.6 percent usable, because 296 of its 331 uV rms is mains hum. The standing counterexample to reading impedance as quality.