Wavewood Nordik





Main Office, R&D and Logistics

Avenida do Polo 3, nº159, 4590-137 Carvalhosa Paços de Ferreira - Portugal Tlm . +351 917 851 019

Office :

Rua Quinta do Bom Retiro nº16, Armazém 9 2820-690 Charneca da Caparica - Portugal Tel. +351 212 964 100 Fax - +351 212 964 101

Vicoustic USA

5701 Sixth Avenue South, Suite 229 Seattle, WA 98108 Tel . (206) 767-2020 E-mail . info@vicousticusa.com

www.vicousticusa.com

Vicoustic's flagship Wavewood panel has been specifically developed to treat acoustic problems without destroying a room's ambience, or over-deadening the sound. It can be used in control rooms, broadcast studios, live rooms where a range of instruments and voices are recorded, rehearsal rooms and other performance spaces.

Wave Wood is made from a combination of acoustic foam and wood. Its instantly recognizable design results from unique research based on the acoustic properties of the wood and foam combined with non-linear sequential cavities that enable Wave Wood to act as both an absorber and diffuser. It is particularly effective in treating medium and high frequencies as well as solving issues such as flutter echoes. Wave Wood can also be highly effective in controlling low frequencies when fitted in the corners of a room and used as a bass trap.

The panel's elegant design enhances the visual appearance of any room, with five different wood finishes available to match a range of studio interiors.

Now available in $1200 \times 600 \times 64$ mm panels, the Wave Wood 1200 has the same perforated surface and performance but is especially indicated for spacious areas.


About Vicoustic's Absorption and Reflection Control System (ARCS):

ARCS is Vicoustic's unique research model that has formed the basis for developing hybrid products such as Wave Wood. Click here to find out more about ARCS.

Applications:

Recording and Broadcast Studios, Post Production Studios, Performance Spaces, Rehearsal Rooms.



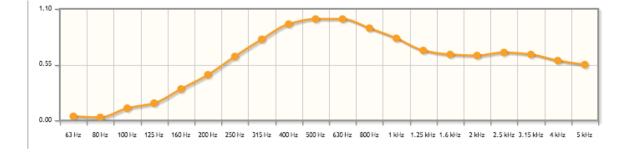

Main Info

Ref: B00108

EAN13: 5600217588985

Technical File

Wavewood Nordik



HS-Code: 39211310

Dimensions: 595.0 x 595.0 x 60.0 mm

Scratch Resistance: No

Washable: No

Performance

Functionality: Absorption
Absorption Frequency: Medium

alpha with Shape Indicators: 0.70 (M)

NRC: 0.750

Fire Class European (EN): Euroclass E

Shipping

Units Per Box: 10 boxes

Box Dimensions: 630.0 x 630.0 x 620.0 mm

Box Weight: 15.4 kg

Row Materials

Material: Wood

Wood Type: Mdf Painted

Foam Type: M1

Design

Wood Color: Nordik

Edges: Angled

Installation

Place: Wall, Ceiling

Fixing Type: Glued

Technical File