

This guide will show the proper way to install a Dual-Vision XC4 Camera in a 2007-2014 Ford Expedition. Please review the Installation Guidelines for grounding and making connections prior to installing. In this guide you will find dash removal, wire locations, & mounting locations.

Verify no vehicle service lights are on prior to installation. Contact a Fleet Manager immediately if the vehicle has any damage

After testing and verifying power wires, disconnect the negative battery terminal to prevent any accidental shorts or blown fuses

UPDATED October 15th, 2018

NEW PART

Harness DV457 is needed if trigger wires are being connected

For Technical Support please contact our support team at:

Techsupport@Roscovision.com




Gray – Caution

Red - Warning

Blue - Extra Installation Parts Needed

Purple - New Installation





IMPORTANT: Windshield Mounting should only be performed when windshield temperature is within 50°F-100°F (10°C-38°C) to allow proper curing of adhesive.

Run the defrost on high heat or use a heat gun in colder temperatures


This assumes you have already performed one temporary install to determine proper Recorder location

Before starting your install, Clean the windshield with 70% Isopropyl Alcohol & allow time to dry

Giving the VHB tape time to cure before mounting the Recorder will give you a permanent bond and prevent recorders from falling off the windshield

A B B

Do not use any other cleaning product on the windshield!





Commercial glass cleaners contain surfactants & denatured alcohol which can reduce the effectiveness of the adhesive

- A- Apply Primer to the mounting location on the windshield. It will leave a film when dry.
- B- Apply Primer to the bracket. Leave the bracket on the dash away from contaminants.
- C- After the primer is dry and the windshield is the correct temperature, apply the VHB tape marked PERMANENT by ROLLING the tape onto the glass to avoid air bubbles.
- D- VERY IMPORTANT Push firmly around all edges of the VHB tape. Apply pressure for 30 seconds

Proceed to the next page for Step 1 of the installation. Apply the bracket to the windshield during the last step of the install



Mount the bracket in a location that allows the lens to be inside the wiper swipe line (Photo A)











For passenger vehicles, mount the Recorder behind the rear-view mirror towards the passenger side (Photo B).

For larger trucks or buses, mount the Recorder as shown (Photo C) and make sure the lens is INSIDE the wiper swipe.


When working on emergency vehicles use extreme caution when routing wires around emergency lights and equipment (Photo D)


Always pull down the vehicle sun visors to make sure they don't block or interfere with the Recorder or the video (Photo E).



Step 1 - Dash Removal:

- Starting from the top, pry the lower dash panel and pull down to remove (Photo A)
- Remove the four 8MM bolts holding the metal panel (Photo B)

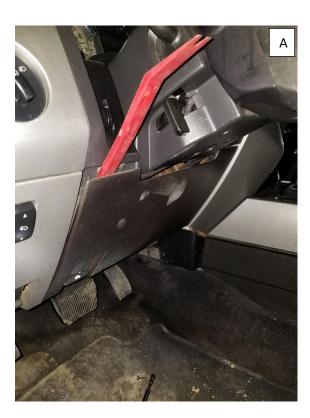


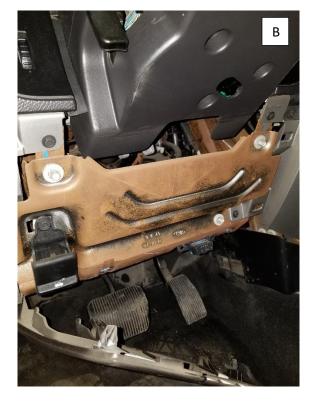



Step 2 - Power Connections:

- The Constant & Ignition wires are located at the steering column
- Connect the RED CONSTANT WIRE to the vehices BLUE/RED wire
- Conect the YELLOW IGNITION WIRE to the vehicles WHTE/ORANGE wire
- Make your ground connection to the metal support brace behind the dash (Blue arrow)

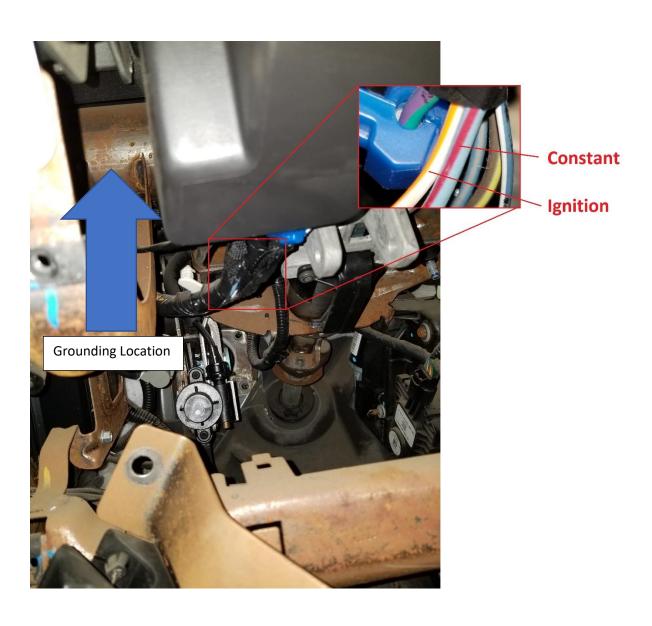



Step 3 - Antenna Mounting:

It's important to mount the antenna on the windshield, with a clear view of the sky

Mount the antenna on the same side of the vehicle as the PDC

Front of Antenna (Flat part needs a clear view of the sky). Bottom of Antenna (Curved part) facing inside the vehicle

Antenna Front "FLAT" side with oval 3M tape applied



Antenna Backside

Notice the angled part of the antenna is facing down (Photo A & B). Make sure the FLAT SIDE of the antenna has a CLEAR VIEW OF THE SKY and is facing OUTSIDE (Photo C)



After all connections are made, coil up all the extra antenna cable (Photo A)

Never bend the cable. This will cause signal loss and damage to the antenna (Photo B)

Please refer to the Antenna Installation Guideline for complete details





Step 4 - PDC & Modem Connections:

- Connect the USB cable from the modem to the PDC and secure with a zip tie (Photo A)
- Connect the Antenna cable to the modem (Photo B)
- Make these connections prior to mounting the modem & PDC
- Make sure the screw on the modem cover is secured and doesn't move or bend (Photo C)





Connect the MIMO 1 antenna wire to the Modems PRI connector




Connect the MIMO 2 antenna wire to the Modems DIV connector



Step 5 - PDC & Modem Mounting Location:

- The PDC is located on the left side of the lower dash
- Secure the wires from the PDC to the factory harness under the dash

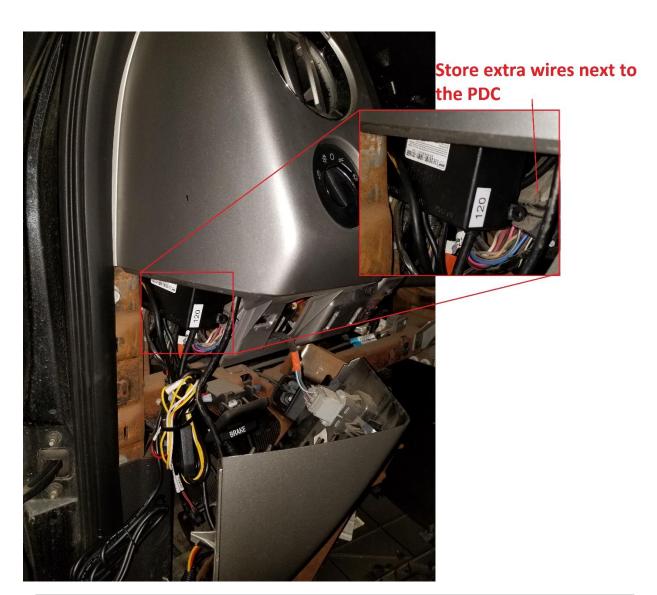

IT'S IMPORTANT TO NEATLY ZIP TIE WIRES TO A FACTORY BRACKET OR HARNESS TO PREVENT FROM FALLING. KEEP AWAY FROM THE STEERING FUNCTIONS AND ANY MOVING PARTS




PDC & Modem Mounting Locations (Continued):

- The modem is located behind the pedal adjustment switch
- Secure the modem with a zip tie to the harness



Please review the Recorder Mounting & VHB Tape Guideline before proceeding to the next step






Step 6 - Camera Mounting and wire Routing:

IMPORTANT: Windshield Mounting should only be performed when windshield temperature is within 50°F-100°F (10°C-38°C) to allow proper curing of adhesive

At this point you can now mount the Recorder bracket to the VHB tape applied to the windshield on Step 1

Mount the bracket to the VHB tape and apply pressure for 30 seconds (A)

With the vehicle off, hook the Recorder to the bracket from the top (1), then swing down (2)

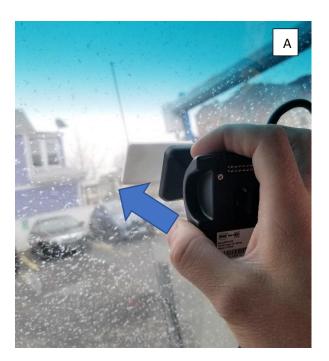





To verify proper angle & correct mounting, press the driver activity button. Logon to your Rosco account and view activity to confirm proper angle

