



Detailed guide - FAS500f

ONTAP Systems

Thripura Naidu Parangsam, Martin Houser, Doug Thompson
October 24, 2021

Table of Contents

- Detailed guide - FAS500f 1
 - Step 1: Prepare for installation. 1
 - Step 2: Install the hardware 2
 - Step 3: Cable controllers 3
 - Step 4: Complete system setup and configuration. 8

Detailed guide - FAS500f

This guide gives detailed step-by-step instructions for installing a FAS500f system..

Step 1: Prepare for installation

To install your FAS500f system, you need to create an account and register the system. You also need to inventory the appropriate number and type of cables for your system and collect specific network information.

You need to have access to the Hardware Universe for information about site requirements as well as additional information on your configured system. You might also want to have access to the Release Notes for your version of ONTAP for more information about this system.

[NetApp Hardware Universe](#)

[Find the Release Notes for your version of ONTAP 9](#)

You need to provide the following at your site:

- Rack space for the storage system
- Phillips #2 screwdriver
- Additional networking cables to connect your system to your network switch and laptop or console with a Web browser

Steps

1. Unpack the contents of all boxes.
2. Record the system serial number from the controllers.








3. Set up your account:
 - a. Log in to your existing account or create an account.
 - b. Register your system.

[NetApp Product Registration](#)

4. Inventory and make a note of the number and types of cables you received.

The following table identifies the types of cables you might receive. If you receive a cable not listed in the table, see the Hardware Universe to locate the cable and identify its use.

[NetApp Hardware Universe](#)

Type of cable...	Part number and length	Connector type	For...
25 GbE cable	X66240A-05 (112-00595), 0.5m;		Cluster interconnect network
	X66240-2 (112-00573), 2m		
	X66240A-2 (112-00598), 2m; X66240A-5 (112-00600), 5m		Data
100 GbE cable	X66211-2 (112-00574), 2m; X66211-5 (112-00576), 5m		Storage
RJ-45 (order dependent)	Not applicable		Management network (BMC and wrench port) and Ethernet data (e0a and e0b)
Fibre Channel	X66250-2 (112-00342) 2m; X66250-5 (112-00344) 5m; X66250-15 (112-00346) 15m; X66250-30 (112-00347) 30m		
Micro-USB console cable	Not applicable		Console connection during software setup
Power cables	Not applicable		Powering up the system

5. Review the *NetApp ONTAP Configuration Guide* and collect the required information listed in that guide.

[ONTAP Configuration Guide](#)


Step 2: Install the hardware

You need to install your system in a 4-post rack or NetApp system cabinet, as applicable.

1. Install the rail kits, as needed.
2. Install and secure your system using the instructions included with the rail kit.



You need to be aware of the safety concerns associated with the weight of the system.

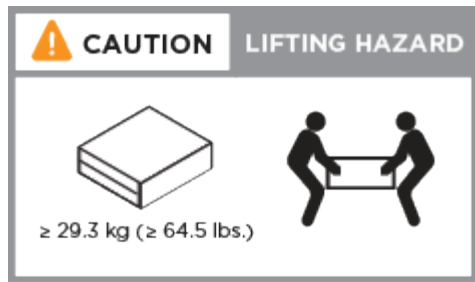

3. Identify and manage cables because this system does not have a cable management device.
4. Place the bezel on the front of the system.

Step 3: Cable controllers

There is required cabling for your platform's cluster using the two-node switchless cluster method or the cluster interconnect network method. There is optional cabling to the Fibre Channel or iSCSI host networks or direct-attached storage. This cabling is not exclusive; you can have cable to a host network and storage.

Required cabling: Cable controllers to a cluster


Cable the controllers to a cluster by using the two-node switchless cluster method or by using the cluster interconnect network.

Option 1: Cable a two node switchless cluster

The management, Fibre Channel, and data or host network ports on the controller modules are connected to switches. The cluster interconnect ports are cabled on both controller modules.

Contact your network administrator for information about connecting the system to the switches.

Be sure to check the illustration arrow for the proper cable connector pull-tab orientation.

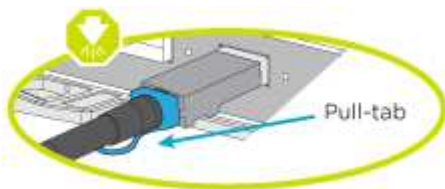

As you insert the connector, you should feel it click into place; if you do not feel it click, remove it, turn it around and try again.

1. Use the animation or the step-by step instructions to complete the cabling between the controllers and to the switches:

[Cabling a two node switchless cluster](#)

Step	Perform on each controller
<div data-bbox="183 159 245 197" data-label="Text">1</div>	<p data-bbox="621 159 1490 222">Cable the cluster interconnect ports to each other with the 25GbE cluster interconnect cable</p> <div data-bbox="621 254 898 296" data-label="Image"> </div> <ul data-bbox="646 327 802 407" style="list-style-type: none"> • e0c to e0c • e0d to e0d <div data-bbox="691 432 1430 594" data-label="Diagram"> </div>
<div data-bbox="183 667 245 705" data-label="Text">2</div>	<p data-bbox="621 667 1490 730">Cable the wrench ports to the management network switches with the RJ45 cables.</p> <div data-bbox="643 793 1425 1024" data-label="Diagram"> </div>
<div data-bbox="183 1087 245 1157" data-label="Image"> </div>	<p data-bbox="621 1083 1490 1115">DO NOT plug in the power cords at this point.</p>


2. To complete setting up your system, see [Step4: Completing system setup and configuration](#).

Option 2: Cable a switched cluster

All ports on the controllers are connected to switches; cluster interconnect, management, Fibre Channel, and data or host network switches.

Contact your network administrator for information about connecting the system to the switches.




Be sure to check the illustration arrow for the proper cable connector pull-tab orientation.

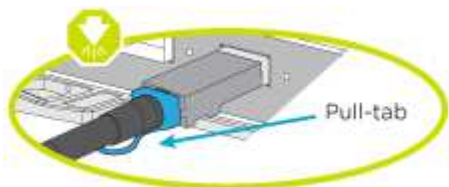

As you insert the connector, you should feel it click into place; if you do not feel it click, remove it, turn it around and try again.

1. Use the animation or the step-by step instructions to complete the cabling between the controllers and to the switches:

Cabling a switched cluster

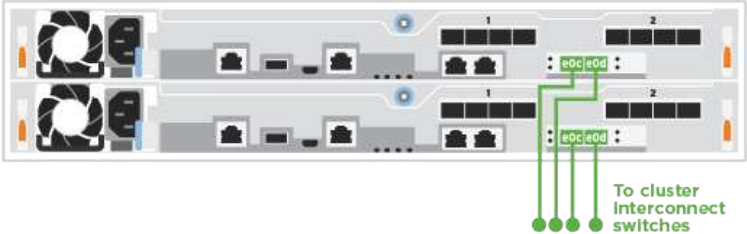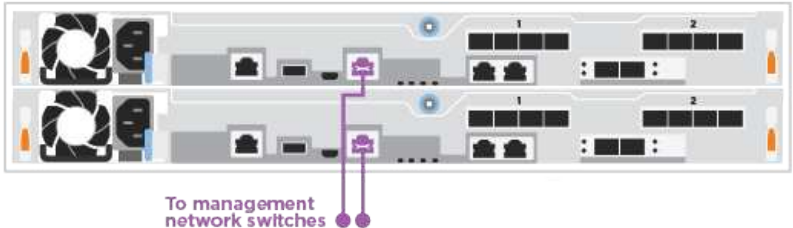Step	Perform on each controller
1	<p>Cable the cluster interconnect ports to the 25 GbE cluster interconnect switches.</p> <ul style="list-style-type: none"> • e0c • e0d 
2	<p>Cable the wrench ports to the management network switches with the RJ45 cables.</p> 
	DO NOT plug in the power cords at this point.

2. To complete setting up your system, see [Step4: Completing system setup and configuration](#).

Optional cabling: Cable configuration-dependent options


You have configuration-dependent optional cabling to the Fibre Channel or iSCSI host networks or direct-attached storage. This cabling is not exclusive; you can have cabling to a host network and storage.

Option 1: Cable to a Fibre Channel host network

Fibre Channel ports on the controllers are connected to Fibre Channel host network switches.

Contact your network administrator for information about connecting the system to the switches.

Be sure to check the illustration arrow for the proper cable connector pull-tab orientation.

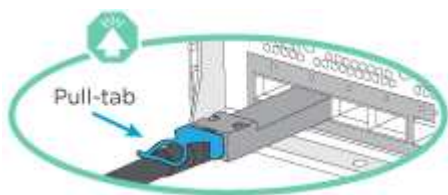

As you insert the connector, you should feel it click into place; if you do not feel it click, remove it, turn it around and try again.

+


Step	Perform on each controller module
1	<div>Cable ports 2a through 2d to the FC host switches.</div> <div></div>
2	<div>To perform other optional cabling, choose from:</div> <div><ul style="list-style-type: none">• Option 2: Cable to a 25GbE data or host network• Option 3: Cable the controllers to a single drive shelf</div>
3	<div>To complete setting up your system, see Step4: Completing system setup and configuration.</div>

Option 2: Cable to a 25GbE data or host network

25GbE ports on the controllers are connected to 25GbE data or host network switches.


Contact your network administrator for information about connecting the system to the switches.

Be sure to check the illustration arrow for the proper cable connector pull-tab orientation.

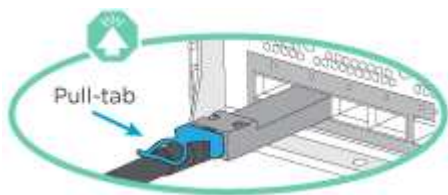




As you insert the connector, you should feel it click into place; if you do not feel it click, remove it, turn it around and try again.

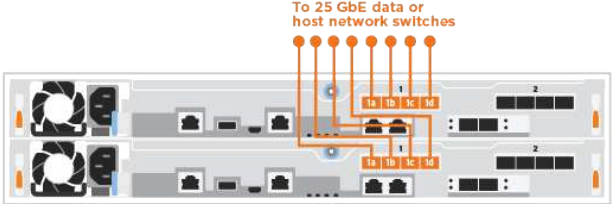Step	Perform on each controller module
1	<p>Cable ports e4a through e4d to the 10GbE host network switches.</p> 
2	<p>To perform other optional cabling, choose from:</p> <ul style="list-style-type: none">• Option 1: Cable to a Fibre Channel host network• Option 3: Cable the controllers to a single drive shelf
3	<p>To complete setting up your system, see Step4: Completing system setup and configuration.</p>

Option 3: Cable the controllers to a single drive shelf

You must cable each controller to the NSM modules on the NS224 drive shelf.



Be sure to check the illustration arrow for the proper cable connector pull-tab orientation.

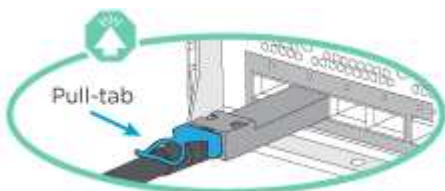

As you insert the connector, you should feel it click into place; if you do not feel it click, remove it, turn it around and try again.

1. Use the animation or the step-by-step instructions to cable your controller modules to a single shelf.

[Cabling the controllers to a single NS224](#)

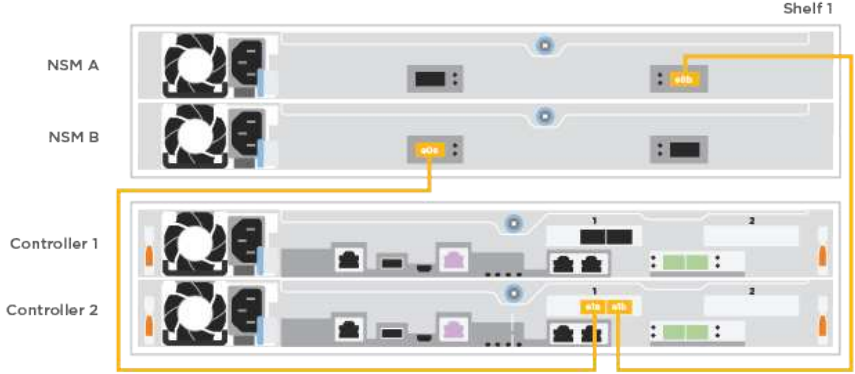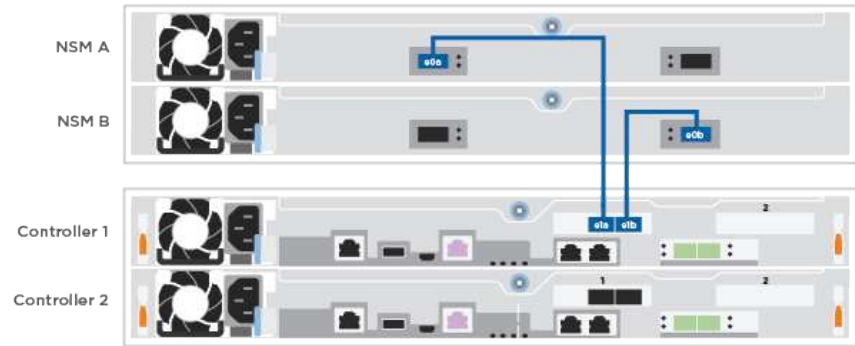Step	Perform on each controller module
<div data-bbox="183 159 245 197" data-label="Text">1</div>	<p data-bbox="621 159 987 191">Cable controller A to the shelf</p> 
<div data-bbox="183 657 245 695" data-label="Text">2</div>	<p data-bbox="621 657 995 688">Cable controller B to the shelf:</p> 

2. To complete setting up your system, see [Step4: Completing system setup and configuration](#).

Step 4: Complete system setup and configuration

Complete the system setup and configuration using cluster discovery with only a connection to the switch and laptop, or by connecting directly to a controller in the system and then connecting to the management switch.

Option 1: Complete system setup and configuration if network discovery is enabled

If you have network discovery enabled on your laptop, you can complete system setup and configuration using automatic cluster discovery.


1. Plug the power cords into the controller power supplies, and then connect them to power sources on different circuits.
2. Make sure that your laptop has network discovery enabled.

See your laptop's online help for more information.

3. Use the following animation to connect your laptop to the Management switch.

Connecting your laptop to the Management switch

4. Select an ONTAP icon listed to discover:

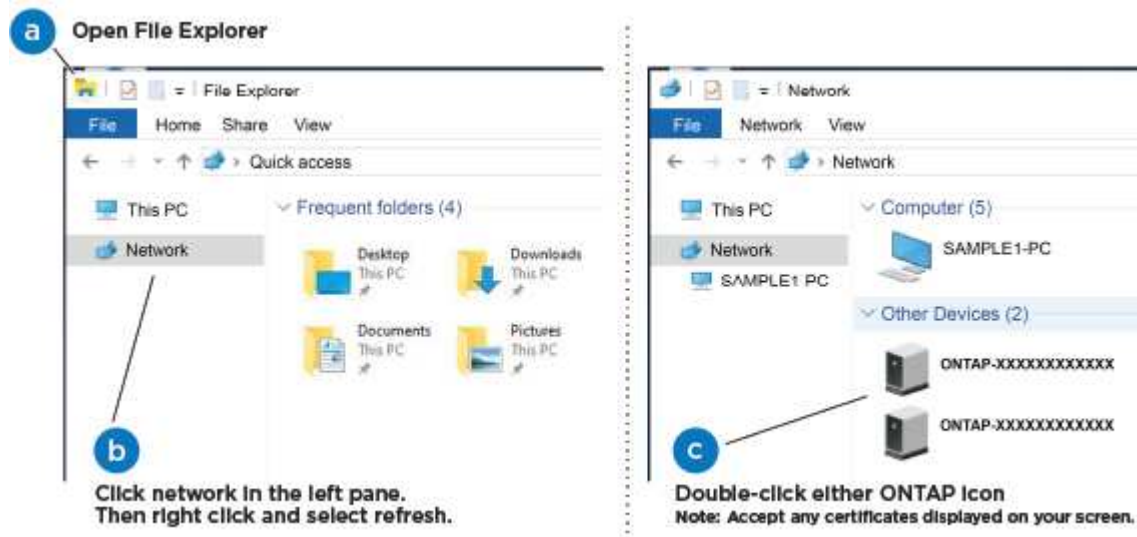

- a. Open File Explorer.
- b. Click network in the left pane.
- c. Right click and select refresh.
- d. Double-click either ONTAP icon and accept any certificates displayed on your screen.



XXXXX is the system serial number for the target node.

System Manager opens.

5. Use System Manager guided setup to configure your system using the data you collected in the *NetApp ONTAP Configuration Guide*.

ONTAP Configuration Guide

6. Verify the health of your system by running Config Advisor.
7. After you have completed the initial configuration, go to the [ONTAP & ONTAP System Manager Documentation Resources](#) page for information about configuring additional features in ONTAP.

Option 2: Complete system setup and configuration if network discovery is not enabled

If network discovery is not enabled on your laptop, you must complete the configuration and setup using this task.

1. Cable and configure your laptop or console:
 - a. Set the console port on the laptop or console to 115,200 baud with N-8-1.




See your laptop or console's online help for how to configure the console port.

- b. Connect the laptop or console to the switch on the management subnet.



- c. Assign a TCP/IP address to the laptop or console, using one that is on the management subnet.
2. Plug the power cords into the controller power supplies, and then connect them to power sources on different circuits.
3. Assign an initial node management IP address to one of the nodes.

If the management network has DHCP...	Then...
Configured	Record the IP address assigned to the new controllers.
Not configured	<ol style="list-style-type: none">a. Open a console session using PuTTY, a terminal server, or the equivalent for your environment. <div> Check your laptop or console's online help if you do not know how to configure PuTTY.</div> <ol style="list-style-type: none">b. Enter the management IP address when prompted by the script.

4. Using System Manager on your laptop or console, configure your cluster:
 - a. Point your browser to the node management IP address.



The format for the address is https://x.x.x.x.

- b. Configure the system using the data you collected in the *NetApp ONTAP Configuration guide*.

[ONTAP Configuration Guide](#)

5. Verify the health of your system by running Config Advisor.
6. After you have completed the initial configuration, go to the [ONTAP & ONTAP System Manager Documentation Resources](#) page for information about configuring additional features in ONTAP.

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system- without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.