


Mikrosize®

Manual Video Measuring System



Measuring Software (Standard Delivery)

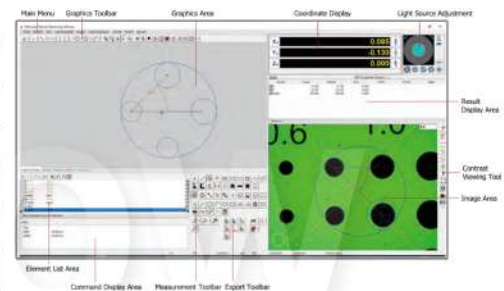

Standard Delivery

Mainframe/Dell PC System	1 set
Zoom Lens 0.7X—4.5X	1
LED Light Source	1
RS-100 Data Processor	1
1/3" CCD Camera	1
Mikrosize Measuring Software	1
Linear Scale	1
Calibration Block	1
Z axis High Precision Linear Guide Rail	1

Model	VMA-2010	VMA-3020	VMA-4030
X.Y-axis Travel Distance(mm)	200X100	300x200	400x300
Z-axis Travel Distance(mm)	200		
Dimensions (mm)	600X500X920	750x520x980	1000x620x990
Net Weight(KG)	120	150	180
X,Y-axis Accuracy	2.5+L/100 μm		
Loading satage	25kg		
Image Sensor	TEO 1/3"Colorful CCD Camera		
Objective Lens	Manual Position Zoom Lens		
Video Total Magnification	Optic Zoom Lens:0.7~4.5x, Objective Lens:20~148x		
Resolution	0.5μm		
Working Distance(Standard)	92 mm		
Object View	8.1mm~1.3mm		
Movement System	X,Y-axis:Polish Rod, Z-axis:T-type Screw Rod		
Data Processor	RS-100		
Illumination	LED Cold Light Contour : Adjustable 256-grades LED Cold illumination		
Measuring Software	Mikrosize		
Working Environment	Temperature: 20°C±2°C, Temperature Variation<2°C/hr,Humidity:30~80%		
	Vibration<0.002g,15Hz		
Power Source	AC 100~220V, 50/60HZ, 10A		



บริการติดตั้ง สอนการใช้งาน



CERTIFICATE ISO/IEC 17025