



Composition KIT BE20/210

Code	Description	QTY
BE20/200	Electromechanical actuator BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 2,2 mt lenght, with mechanical stopper in opening and closing.	2
B70/2DC/BOX	Digital control 24V for 2 BRUSHLESS motor, with plastic box.	1
H93/RX22A/I	Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70 and AG/CTRL.	1
E80/TX52R/2	Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.	2
R90/F4ES	Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).	1
R92/LED24	LED flashing light series R92 24V.	1
R91/AN1/LR1	Antenna for flashing light R92 series	1
R99/C/001	Signboard Automatic Opening".	1

Product technical specifications	KIT BE20/210
Number items per pallet	21
Power	24V
Power rating	200W
Max thrust	100 - 2200N
Frequency of use	Intensive use
Operating temperature	-20 C° +55 C°
Protection level	IP 43
Stroke	400 mm
Manoeuvre speed	1,66 cm/s
Opening time at 90°	19-30 s
Maximum dimension product in mm	L867 x W115 x 155 H
Operating cycles per day (opening/closing - 24 hours no stop)	800 cycles
Limit switch	Mechanical stopper in opening and closing
Always included in the individual product package or kit:	Kit of screw-adjustable short rear bracket and screw-welded short front bracket (KT206/R), 2 mechanical stop (MC781).
Reductor Type	Irreversible

IRREVERSIBLE ELECTROMECHANICAL MOTOR FOR SWING GATES UP TO 2,2 MT WIDE.


KIT Electromechanical actuator BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible, ideal for swing gates with leaf up to 2,2 mt lenght, with mechanical stopper in opening and closing.

PACKAGING INFORMATION




Size in cm: Lenght: 89 - Widht: 26 - Heigh: 21.5

PRODUCT DIMENSIONS AND PREPARING FOR INSTALLATION

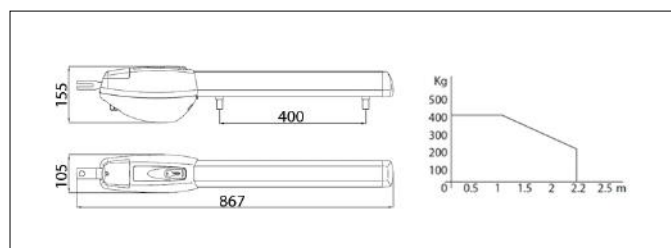

DIMENSIONS

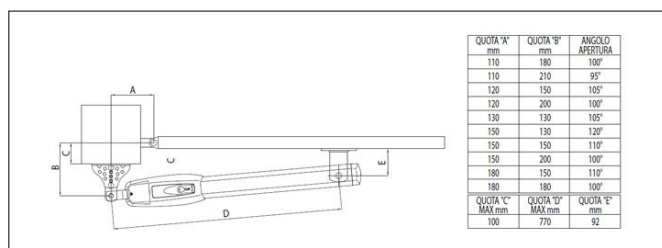

PREDISPOSITION FOR STANDARD INSTALLATION

PRODUCT ACCESSORIES



MC781
Kit mechanical stop
BR20, BE20 series,
R20/300MS and
R20/500MS.



KT202
Short front hinge
plate, to weld.



KT204
Short rear hinge
plate, to weld.



KT206
Kit 3 hinge plates
short, to weld.