

AOS-CX 10.09 Fundamentals Guide

4100i, 6000, 6100 Switch Series



Copyright Information

© Copyright 2022 Hewlett Packard Enterprise Development LP.

Open Source Code

This product includes code licensed under the GNU General Public License, the GNU Lesser General Public License, and/or certain other open source licenses. A complete machine-readable copy of the source code corresponding to such code is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company
6280 America Center Drive
San Jose, CA 95002
USA

Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Acknowledgments

Bluetooth is a trademark owned by its proprietor and used by Hewlett Packard Enterprise under license.

Contents	3
About this document	9
Applicable products	9
Latest version available online	9
Command syntax notation conventions	9
About the examples	10
Identifying switch ports and interfaces	10
About AOS-CX	12
AOS-CX system databases	12
Aruba Network Analytics Engine introduction	12
AOS-CX CLI	13
Aruba NetEdit	13
Ansible modules	13
AOS-CX Web UI	13
AOS-CX REST API	14
In-band management	14
SNMP-based management support	14
User accounts	14
Initial Configuration	16
Initial configuration using ZTP	16
Initial configuration using the CLI	16
Connecting to the console port	17
Connecting to the in-band management port	17
Configure using DHCP or static IP	18
Logging into the switch for the first time	19
Setting switch time using the NTP client	19
Configuring banners	20
Using the Web UI	20
Configuring the in-band management interface	21
Restoring the switch to factory default settings	21
NTP commands	23
ntp authentication	23
ntp authentication-key	24
ntp disable	25
ntp enable	26
ntp server	27
ntp trusted-key	29
ntp vrf	29
show ntp associations	30
show ntp authentication-keys	31
show ntp servers	32
show ntp statistics	33
show ntp status	33
Interface configuration	35
Configuring a layer 2 interface	35

Single source IP address	35
Priority-based flow control	35
Unsupported transceiver support	35
Interface commands	36
allow-unsupported-transceiver	36
default interface	38
description	38
energy-efficient-ethernet	39
flow-control	40
interface	41
interface vlan	42
ip address	42
ip mtu	43
ip source-interface	44
ipv6 address	45
ipv6 source-interface	46
mtu	47
persona	48
show allow-unsupported-transceiver	49
show interface	50
show interface dom	53
show interface energy-efficient ethernet	53
show interface flow-control	54
show interface transceiver	56
show ip interface	58
show ip source-interface	59
show ipv6 interface	60
show ipv6 source-interface	61
shutdown	61
Source interface selection	63
Source-interface selection commands	63
ip source-interface (protocol <ip-addr>)	63
ip source-interface	65
ipv6 source-interface	66
ipv6 source-interface	67
show ip source-interface	69
show ipv6 source-interface	70
show running-config	72
VLANs	74
Configuration and firmware management	75
Checkpoints	75
Checkpoint types	75
Maximum number of checkpoints	75
User generated checkpoints	75
System generated checkpoints	75
Supported remote file formats	75
Rollback	76
Checkpoint auto mode	76
Testing a switch configuration in checkpoint auto mode	76
Checkpoint commands	76
checkpoint auto	76
checkpoint auto confirm	77
checkpoint diff	78

checkpoint post-configuration	79
checkpoint post-configuration timeout	80
checkpoint rename	81
checkpoint rollback	82
copy checkpoint <CHECKPOINT-NAME> <REMOTE-URL>	82
copy checkpoint <CHECKPOINT-NAME> {running-config startup-config}	83
copy checkpoint <CHECKPOINT-NAME> <STORAGE-URL>	84
copy <REMOTE-URL> checkpoint <CHECKPOINT-NAME>	85
copy <REMOTE-URL> {running-config startup-config}	86
copy running-config {startup-config checkpoint <CHECKPOINT-NAME>}	87
copy {running-config startup-config} <REMOTE-URL>	88
copy {running-config startup-config} <STORAGE-URL>	89
copy startup-config running-config	90
copy <STORAGE-URL> running-config	91
erase	92
show checkpoint <CHECKPOINT-NAME>	93
show checkpoint <CHECKPOINT-NAME> hash	96
show checkpoint post-configuration	96
show checkpoint	97
show checkpoint date	98
show running-config hash	98
show startup-config hash	99
write memory	100
Boot commands	101
boot set-default	101
boot system	101
show boot-history	103
Firmware management commands	104
copy {primary secondary} <REMOTE-URL>	104
copy {primary secondary} <FIRMWARE-FILENAME>	105
copy primary secondary	106
copy <REMOTE-URL>	107
copy secondary primary	108
copy <STORAGE-URL>	109
Dynamic Segmentation	111
User-based tunneling	111
User-based tunneling commands	115
backup-controller ip	115
enable	116
ip source-interface	116
papi-security-key	117
primary-controller ip	119
sac-heartbeat-interval	119
show ip source-interface ubt	120
show capacities ubt	121
show ubt	122
show ubt information	124
show ubt state	126
show ubt statistics	129
show ubt users	133
uac-keepalive-interval	135
ubt	136
ubt-client-vlan	137
ubt mode vlan-extend	138

SNMP	139
Configuring SNMP	139
Aruba Central integration	141
Connecting to Aruba Central	141
Custom CA certificate	141
Support mode in Aruba Central	142
Aruba Central commands	142
aruba-central	142
aruba-central support-mode	143
configuration-lockout central managed	144
disable	145
enable	145
location-override	146
show aruba-central	147
show running-config current-context	148
Port filtering	150
Port filtering commands	150
portfilter	150
show portfilter	151
DNS	153
DNS client	153
Configuring the DNS client	153
DNS client commands	154
ip dns domain-list	154
ip dns domain-name	155
ip dns host	155
ip dns server address	156
show ip dns	157
Device discovery and configuration	159
Device profiles	159
Configuring a device profile for LLDP	160
Configuring a device profile for CDP	160
Configuring a device profile for local MAC match	160
Device profile commands	161
aaa authentication port-access allow-cdp-bpdu	161
aaa authentication port-access allow-cdp-proxy-logoff	162
aaa authentication port-access allow-ldp-bpdu	163
associate cdp-group	164
associate lldp-group	165
associate mac-group	166
associate role	167
disable	168
enable	168
ignore (for CDP groups)	169
ignore (for LLDP groups)	170
ignore (for MAC groups)	171
mac-group	176
match (for CDP groups)	177
match (for LLDP groups)	179
match (for MAC groups)	180
port-access cdp-group	184
port-access device-profile	185

port-access device-profile mode block-until-profile-applied	186
port-access lldp-group	187
show port-access device-profile	188
LLDP	189
LLDP agent	190
LLDP MED support	192
Configuring the LLDP agent	192
LLDP commands	193
clear lldp neighbors	193
clear lldp statistics	193
lldp	194
lldp dot3	194
lldp holdtime	195
lldp management-ipv4-address	196
lldp management-ipv6-address	197
lldp med	198
lldp med-location	199
lldp receive	200
lldp reinit	200
lldp select-tlv	201
lldp timer	202
lldp transmit	203
lldp txdelay	204
lldp trap enable	205
show lldp configuration	207
show lldp local-device	208
show lldp neighbor-info	210
show lldp neighbor-info detail	212
show lldp statistics	214
show lldp tlv	216
Cisco Discovery Protocol (CDP)	216
CDP support	217
CDP commands	217
cdp	217
clear cdp counters	218
clear cdp neighbor-info	219
show cdp	219
show cdp neighbor-info	220
show cdp traffic	221
Zero Touch Provisioning	222
ZTP support	222
Setting up ZTP on a trusted network	223
ZTP process during switch boot	224
ZTP commands	225
show ztp information	225
ztp force provision	228
Switch system and hardware commands	230
clear events	230
console baud-rate	230
domain-name	231
hostname	232
show boot-history	233
show capacities	235
show capacities-status	238

show console	239
show core-dump	239
show domain-name	241
show environment fan	242
show environment led	243
show environment power-supply	243
show environment temperature	244
show events	246
show hostname	248
show images	249
show module	250
show running-config	251
show running-config current-context	255
show startup-config	256
show system	257
show system resource-utilization	258
show tech	259
show usb	261
show usb file-system	261
show version	263
system resource-utilization poll-interval	263
top cpu	264
top memory	265
usb	265
usb mount unmount	266

Support and Other Resources268

Accessing Aruba Support	268
Accessing Updates	269
Aruba Support Portal	269
My Networking	269
Warranty Information	269
Regulatory Information	269
Documentation Feedback	270

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing Aruba switches on a network.

Applicable products

This document applies to the following products:

- Aruba 4100i Switch Series (JL817A, JL818A)
- Aruba 6000 Switch Series (R8N85A, R8N86A, R8N87A, R8N88A, R8N89A)
- Aruba 6100 Switch Series (JL675A, JL676A, JL677A, JL678A, JL679A)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in [Support and Other Resources](#).

Command syntax notation conventions

Convention	Usage
<code>example-text</code>	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example-text	In code and screen examples, indicates text entered by a user.
Any of the following: ■ <code><example-text></code> ■ <code><example-text></code> ■ <i>example-text</i> ■ <i>example-text</i>	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: ■ For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. ■ For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.
{ }	Braces. Indicates that at least one of the enclosed items is required.

Convention	Usage
[]	Brackets. Indicates that the enclosed item or items are optional.
... or ...	Ellipsis: ■ In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. ■ In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment. The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term `switch`, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch (CONTEXT-NAME)#
```

Indicates the configuration context for a feature. For example:

```
switch(config-if) #
```

Identifies the `interface` context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch(config-vlan-100) #
```

When referring to this context, this document uses the syntax:

```
switch(config-vlan-<VLAN-ID>) #
```

Where `<VLAN-ID>` is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format:

```
member/slot/port
```

On the 4100i Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface 1/1/4 in software is associated with physical port 4 on the switch.

On the 6000 and 6100 Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Always 1. This is not a modular switch, so there are no slots.
- *port*: Physical number of a port on the switch.

For example, the logical interface 1/1/4 in software is associated with physical port 4 on the switch.

AOS-CX is a new, modern, fully programmable operating system built using a database-centric design that ensures higher availability and dynamic software process changes for reduced downtime. In addition to robust hardware reliability, the AOS-CX operating system includes additional software elements not available with traditional systems, including:

- **Automated visibility to help IT organizations scale:** The Aruba Network Analytics Engine allows IT to monitor and troubleshoot network, system, application, and security-related issues easily through simple scripts. This engine comes with a built-in time series database that enables customers and developers to create software modules that allow historical troubleshooting, as well as analysis of historical trends to predict and avoid future problems due to scale, security, and performance bottlenecks.
- **Programmability simplified:** A switch that is running the AOS-CX operating system is fully programmable with a built-in Python interpreter as well as REST-based APIs, allowing easy integration with other devices both on premise and in the cloud. This programmability accelerates IT organization understanding of and response to network issues. The database holds all aspects of the configuration, statistics, and status information in a highly structured and fully defined form.
- **Faster resolution with network insights:** With legacy switches, IT organizations must troubleshoot problems after the fact, using traditional tools like CLI and SNMP, augmented by separate, expensive monitoring, analytics, and troubleshooting solutions. These capabilities are built in to the AOS-CX operating system and are extensible.
- **High availability:** For switches that support active and standby management modules, the AOS-CX database can synchronize data between active and standby modules and maintain current configuration and state information during a failover to the standby management module.
- **Ease of roll-back to previous configurations:** The built-in database acts as a network record, enabling support for multiple configuration checkpoints and the ability to roll back to a previous configuration checkpoint.

AOS-CX system databases

The AOS-CX operating system is a modular, database-centric operating system. Every aspect of the switch configuration and state information is modeled in the AOS-CX switch configuration and state database, including the following:

- Configuration information
- Status of all features
- Statistics

The AOS-CX operating system also includes a time series database, which acts as a built-in network record. The time series database makes the data seamlessly available to Aruba Network Analytics Engine agents that use rules that evaluate network conditions over time. Time-series data about the resources monitored by agents are automatically collected and presented in graphs in the switch Web UI.

Aruba Network Analytics Engine introduction

The Aruba Network Analytics Engine is a first-of-its-kind built-in framework for network assurance and remediation. Combining the full automation and deep visibility capabilities of the AOS-CX operating system, this unique framework enables monitoring, collecting network data, evaluating conditions, and taking corrective actions through simple scripting agents.

This engine is integrated with the AOS-CX system configuration and time series databases, enabling you to examine historical trends and predict future problems due to scale, security, and performance bottlenecks. With that information, you can create software modules that automatically detect such issues and take appropriate actions.

With the faster network insights and automation provided by the Aruba Network Analytics Engine, you can reduce the time spent on manual tasks and address current and future demands driven by Mobility and IoT.

AOS-CX CLI

The AOS-CX CLI is an industry standard text-based command-line interface with hierarchical structure designed to reduce training time and increase productivity in multivendor installations.

The CLI gives you access to the full set of commands for the switch while providing the same password protection that is used in the Web UI. You can use the CLI to configure, manage, and monitor devices running the AOS-CX operating system.

Aruba NetEdit

Aruba NetEdit enables the automation of multidevice configuration change workflows without the overhead of programming.

The key capabilities of NetEdit include the following:

- Intelligent configuration with validation for consistency and compliance
- Time savings by simultaneously viewing and editing multiple configurations
- Customized validation tests for corporate compliance and network design
- Automated large-scale configuration deployment without programming
- Ability to track changes to hardware, software, and configurations (whether made through NetEdit or directly on the switch) with automated versioning

For more information about Aruba NetEdit, search for NetEdit at the following website:

www.hpe.com/support/hpesc

Ansible modules

Ansible is an open-source IT automation platform.

Aruba publishes a set of Ansible configuration management modules designed for switches running AOS-CX software. The modules are available from the following places:

- The `arubanetworks.aoscx_role` role in the Ansible Galaxy at: https://galaxy.ansible.com/arubanetworks/aoscx_role
- The `aoscx-ansible-role` at the following GitHub repository: <https://github.com/aruba/aoscx-ansible-role>

AOS-CX Web UI

The Web UI gives you quick and easy visibility into what is happening on your switch, providing faster problem detection, diagnosis, and resolution. The Web UI provides dashboards and views to monitor the status of the switch, including easy to read indicators for: power supply, temperature, fans, CPU use, memory use, log entries, system information, firmware, interfaces, VLANs, and LAGs. In addition, you use the Web UI to access the Network Analytics Engine, run certain diagnostics, and modify some aspects of the switch configuration.

AOS-CX REST API

Switches running the AOS-CX software are fully programmable with a REST (REpresentational State Transfer) API, allowing easy integration with other devices both on premises and in the cloud. This programmability—combined with the Aruba Network Analytics Engine—accelerates network administrator understanding of and response to network issues.

The AOS-CX REST API enables programmatic access to the AOS-CX configuration and state database at the heart of the switch. By using a structured model, changes to the content and formatting of the CLI output do not affect the programs you write. And because the configuration is stored in a structured database instead of a text file, rolling back changes is easier than ever, thus dramatically reducing a risk of downtime and performance issues.

The AOS-CX REST API is a web service that performs operations on switch resources using HTTPS `POST`, `GET`, `PUT`, and `DELETE` methods.

A switch resource is indicated by its Uniform Resource Identifier (URI). A URI can be made up of several components, including the host name or IP address, port number, the path, and an optional query string. The AOS-CX operating system includes the AOS-CX REST API Reference, which is a web interface based on the Swagger UI. The AOS-CX REST API Reference provides the reference documentation for the REST API, including resources URIs, models, methods, and errors. The AOS-CX REST API Reference shows most of the supported read and write methods for all switch resources.

In-band management

Management communications with a managed switch can be:

In band

In-band management communications occur through ports on the line modules of the switch, using common communications protocols such as SSH and SNMP.

When you use an in-band management connection, management traffic from that connection uses the same network infrastructure as user data. User data uses the `data plane`, which is responsible for moving data from source to destination. Management traffic that uses the data plane is more likely to be affected by traffic congestion and other issues affecting the user network.

SNMP-based management support

The AOS-CX operating system provides SNMP read access to the switch. SNMP support includes support of industry-standard MIB (Management Information Base) plus private extensions, including SNMP events, alarms, history, statistics groups, and a private alarm extension group. SNMP access is disabled by default.

User accounts

To view or change configuration settings on the switch, users must log in with a valid account. Authentication of user accounts can be performed locally on the switch, or by using the services of an external TACACS+ or RADIUS server.

Two types of user accounts are supported:

- Operators: Operators can view configuration settings, but cannot change them. No operator accounts are created by default.
- Administrators: Administrators can view and change configuration settings. A default locally stored administrator account is created with username set to **admin** and no password. You set the administrator account password as part of the initial configuration procedure for the switch.

Perform the initial configuration of a factory default switch using one of the following methods:

- Load a switch configuration using zero-touch provisioning (ZTP). When ZTP is used, the configuration is loaded from a server automatically when the switch booted from the factory default configuration.
- Connect the management port on the switch to your network, and then use SSH client software to reach the switch from a computer connected to the same network. This requires that a DHCP server is installed on the network. Configure switch settings and features by executing CLI commands.
- Connect a computer running terminal emulation software to the console port on the switch. Configure switch settings and features by executing CLI commands.

Initial configuration using ZTP

Zero Touch Provisioning (ZTP) configures a switch automatically from a remote server.

Prerequisites

- The switch must be in the factory default configuration.

Do not change the configuration of the switch from its factory default configuration in any way, including by setting the administrator password.

- Your network administrator or installation site coordinator must provide a Category 6 (Cat6) cable connected to the network that provides access to the servers used for Zero Touch Provisioning (ZTP) operations.

Procedure

1. Connect the network to a data port.
See the *Installation Guide* for switch to determine the location of the switch ports.
2. If the switch is powered on, power off the switch.
3. Power on the switch. During the ZTP operation, the switch might reboot if a new firmware image is being installed. ZTP goes to "Failed" state if the switch receives DHCP IP for vlan1 and does not receive any ZTP options within 60 seconds.

Initial configuration using the CLI

This procedure describes how to connect to the switch for the first time and configure basic operational settings using the CLI. In this procedure, you use a computer to connect to the switch using the either the console port or management port.

Procedure

1. Connect to the [console port](#) or the [management port](#).
2. [Log into the switch for the first time](#).
3. [Configure switch time using the NTP client](#).

Connecting to the console port

Prerequisites

- A switch installed as described in its hardware installation guide.
- A computer with terminal emulation software.

Procedure

1. Start the terminal emulation software on the computer and configure a new serial session with the following settings:
 - Speed: 115200 bps
 - Data bits: 8
 - Stop bits: 1
 - Parity: None
 - Flow control: None
2. Start the terminal emulation session.
3. Press **Enter** once. If the connection is successful, you are prompted to login.

Optional console port speed setting

If desired, the console port speed can be set with the `console baud-rate` command. For example, setting the console port speed to 9600 bps:

```
switch(config)# console baud-rate 9600
This command will configure the baud rate immediately for the active serial
console session. After the command is executed the user will be prompted to
re-login. The serial console will be inaccessible until the terminal client
settings are updated to match the baud rate of the switch.
Continue (y/n)? y
```

Showing the console port current speed:

```
switch# show console
Baud Rate: 9600
```

For details on the `console baud-rate` and `show console` commands, see [Switch system and hardware commands](#).

Connecting to the in-band management port

Prerequisites

- Two Ethernet cables
- SSH client software

Procedure

1. By default, the in-band management interface is set to automatically obtain an IP address from a DHCP server, and SSH support is enabled. If there is no DHCP server on your network, you must configure a static address on the in-band management interface:
 - a. Connect to the [console port](#)
 - b. Configure using [DHCP or static IP](#).
 - c. Configure the in-band management interface and interface VLAN1.
2. Use an Ethernet cable to connect the management port to your network.
3. Use an Ethernet cable to connect your computer to the same network.
4. Start your SSH client software and configure a new session using the address assigned to the in-band management interface. (If the in-band management interface is set to operate as a DHCP client, retrieve the IP address assigned to the in-band management interface from your DHCP server.)
5. Start the session. If the connection is successful, you are prompted to log in.

Configure using DHCP or static IP



Users can use any data ports for in-band management purposes. IP DHCP is supported on interface VLAN 1 only. All switch ports are part of access VLAN 1 by default. Static IP address and IP DHCP configuration can co-exist on VLAN 1, however static addresses take precedence whenever configured.

DHCP Configuration

```
switch#: config
switch(config)#: vlan 1
Switch(config-vlan-1)#: description Management VLAN
Switch(config-vlan-1)#: end
Switch#
!
Switch(config)#: interface 1/1/1
Switch(config-if)#: description IN-BAND Management Port
Switch(config-if)#: vlan access 1
Switch(config-if)#: no shutdown
Switch(config-if)#: end
Switch#
!
Switch(config)#: interface vlan 1
Switch(config-if-vlan)#: description IN-BAND Management Interface
Switch(config-if-vlan)#: ip dhcp
Switch(config-if-vlan)#: no shutdown
Switch(config-if-vlan)#: end
Switch#
!
```

Without DHCP Configuration

```
switch#: config
switch(config)#: vlan 1
Switch(config-vlan-1)#: description Management VLAN
Switch(config-vlan-1)#: end
Switch#
!
Switch(config)#: interface 1/1/1
Switch(config-if)#: description IN-BAND Management Port
Switch(config-if)#: vlan access 1
Switch(config-if)#: no shutdown
```

```
Switch(config-if)#: end
Switch#
!
Switch(config)#: interface vlan 1
Switch(config-if-vlan)#: description IN-BAND Management Interface
Switch(config-if-vlan)#: no ip dhcp
Switch(config-if-vlan)#: ip address 192.168.10.1/24
Switch(config-if-vlan)#: no shutdown
Switch(config-if-vlan)#: end
Switch#
```

Logging into the switch for the first time

The first time you log in to the switch you must use the default administrator account. This account has no password, so you will be prompted on login to define one to safeguard the switch.

Procedure

1. When prompted to log in, specify **admin**. When prompted for the password, press **ENTER**. (By default, no password is defined.)

For example:

```
switch login: admin
password:
```

2. Define a password for the **admin** account. The password can contain up to 32 alphanumeric characters in the range ASCII 32 to 127, which includes special characters such as asterisk (*), ampersand (&), exclamation point (!), dash (-), underscore (_), and question mark (?).

For example:

```
Please configure the 'admin' user account password.
Enter new password: *****
Confirm new password: *****
switch#
```

3. You are placed into the manager command context, which is identified by the prompt: `switch#`, where `switch` is the model number of the switch. Enter the command `config` to change to the global configuration context `config`.

For example:

```
switch# config
switch(config)#
```

Setting switch time using the NTP client

Prerequisites

- The IP address or domain name of an NTP server.
- If the NTP server uses authentication, obtain the password required to communicate with the NTP server.

Procedure

1. If the NTP server requires authentication, define the authentication key for the NTP client with the command `ntp authentication`.
2. Configure an NTP server with the command `ntp server`.
3. By default, NTP traffic is sent on the default VRF.
4. Review your NTP configuration settings with the commands `show ntp servers` and `show ntp status`.
5. See the current switch time, date, and time zone with the command `show clock`.

Example

This example creates the following configuration:

- Defines the authentication key **1** with the password **myPassword**.
- Defines the NTP server **my-ntp.mydomain.com** and makes it the preferred server.

```
switch(config)# ntp authentication-key 1 md5 myPassword
switch(config)# ntp server my-ntp.mydomain.com key 10 prefer
switch(config)# ntp vrf default
```

Configuring banners

1. Configure the banner that is displayed when a user connects to a device using a console port or in-band management interface. Use the command `banner motd`. For example:

```
switch(config)# banner motd ^
Enter a new banner. Terminate the banner with the delimiter you have chosen.
>> This is an example of a banner text which a connecting user
>> will see before they are prompted for their password.
>>
>> As you can see it may span multiple lines and the input
>> will be terminated when the delimiter character is
>> encountered.^
Banner updated successfully!
```

2. Configure the banner that is displayed after a user is authenticated. Use the command `banner exec`. For example:

```
switch(config)# banner exec &
Enter a new banner. Terminate the banner with the delimiter you have chosen.
>> This is an example of a different banner text. This time
>> the banner entered will be displayed after a user has
>> authenticated.
>>
>> & This text will not be included because it comes after the '&'
Banner updated successfully!
```

Using the Web UI

Prerequisites

- A connection to the switch CLI.



On the 6000 and 6100, the HTTPS server can only be enabled by the default VRF.



On the 4100i, the HTTPS server can only be enabled by the default VRF.

Procedure

1. Log in to the CLI.
2. Switch to `config` context.

For example:

```
switch# config  
switch(config)# https-server vrf default
```

3. The Web UI starts and you are prompted to log in.

Configuring the in-band management interface

Prerequisites

A connection to the console port.

Procedure

1. Switch to the in-band management interface context with the command `interface vlan 1`.
2. By default, the in-band management interface is enabled. If it was disabled, re-enable it with the command `no shutdown`.
3. Use the command `ip dhcp` to configure the in-band management interface to automatically obtain an address from a DHCP server on the network (factory default setting). Or, assign a static IPv4 or IPv6 address with the commands `ip address` or `ipv6 address`.
4. SSH is enabled by default on the default VRF. If disabled, enable SSH with the command `ssh server vrf default`.

Examples

This example enables the in-band management interface with static addressing:

```
switch(config)# interface vlan 1  
switch(config-if-vlan)# no ip dhcp  
switch(config-if-vlan)# ip address 192.168.100.200/24  
switch(config-if-vlan)# no shutdown
```

Restoring the switch to factory default settings

Prerequisites

You are connected to the switch through its Console port.



This procedure erases all user information and configuration settings. Consider backing up your running configuration first.

1. Optionally, back up the running configuration with either `copy running-config <REMOTE-URL>` or `copy running-config <STORAGE-URL>`. The `json` storage format is required for later configuration restoration.
2. Switch to the configuration context with the command `config`.
3. Erase all user information and configuration, restoring the switch to its factory default state with the command `erase all zeroize`. Enter `Y` when prompted to continue. The switch automatically restarts.
4. Optionally restore your saved configuration (it must be in `json` format) with either `copy <REMOTE-URL> running-config` or `copy <STORAGE-URL> running-config` followed by `copy running-config startup-config`.

Example

Backing up the running configuration to a file on a remote server (using TFTP), resetting the switch to its factory default state, and then restoring the saved configuration.

```
switch# copy running-config tftp://10.100.1.12/backup_cfg json vrf default

  % Total      % Received % Xferd  Average Speed   Time    Time       Time  Current
   100 10340    0     0  100 10340      0   1329k  --:--:--  --:--:--  --:--:--  1329k
  100 10340    0     0  100 10340      0   1313k  --:--:--  --:--:--  --:--:--  1313k
switch#
switch#
switch# erase all zeroize
This will securely erase all customer data and reset the switch
to factory defaults. This will initiate a reboot and render the
switch unavailable until the zeroization is complete.
This should take several minutes to one hour to complete.
Continue (y/n)? y
The system is going down for zeroization.
[ OK ] Stopped PSPO Module Daemon.
[ OK ] Stopped AOS-CX Switch Daemon for BCM.
...
[ OK ] Stopped Remount Root and Kernel File Systems.
[ OK ] Reached target Shutdown.
reboot: Restarting system
Press Esc for boot options
ServiceOS Information:
  Version:          GT.01.03.0006
  Build Date:       2018-10-30 14:20:44 PDT
  Build ID:         ServiceOS:GT.01.03.0006:8ee0faaa52da:201810301420
  SHA:             xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
...

##### Preparing for zeroization #####

##### Storage zeroization #####
##### WARNING: DO NOT POWER OFF UNTIL #####
##### ZEROIZATION IS COMPLETE #####
##### This should take several minutes #####
##### to one hour to complete #####

##### Restoring files #####
```

```

Boot Profiles:

0. Service OS Console
1. Primary Software Image [XL.10.02.0010]
2. Secondary Software Image [XL.10.02.0010]

Select profile(primary):

Booting primary software image...
Verifying Image...

Image Info:
    Name: AOS-CX
    Version: XL.10.02.0010
    Build Id: AOS-CX:XL.10.02.0010:feaf5b9b7f09:201901292014
    Build Date: 2019-01-29 12:43:50 PST

Extracting Image...
Loading Image...
Done.
kexec_core: Starting new kernel
System is initializing
fips_post_check[5473]: FIPS_POST: Cryptographic selftest started...SUCCESS
[ OK ] Started Login banner readiness check.
...
8400X login: admin
Password:

switch#
switch#
switch# copy tftp://192.168.1.10/backup_cfg running-config json vrf default
  % Total      % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 10340  100 10340    0     0  2858k      0  --:--:-- --:--:-- --:--:-- 2858k
100 10340  100 10340    0     0  2804k      0  --:--:-- --:--:-- --:--:-- 2804k
Large configuration changes will take time to process, please be patient.
switch#
switch#
switch# copy running-config startup-config
Large configuration changes will take time to process, please be patient.
switch#

```

NTP commands

ntp authentication

```

ntp authentication
no ntp authentication

```

Description

Enables support for authentication when communicating with an NTP server.
The `no` form of this command disables authentication support.

Examples

Enabling authentication support:

```
switch(config)# ntp authentication
```

Disabling authentication support:

```
switch(config)# no ntp authentication
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp authentication-key

```
ntp authentication-key <KEY-ID> {md5 | sha1}
    [{ <PLAINTEXT-KEY> [trusted] | ciphertext <ENCRYPTED-KEY> }]
no ntp authentication-key <KEY-ID> {md5 | sha1}
    [{ <PLAINTEXT-KEY> [trusted] | ciphertext <ENCRYPTED-KEY> }]
```

Description

Defines an authentication key that is used to secure the exchange with an NTP time server. This command provides protection against accidentally synchronizing to a time source that is not trusted.

The `no` form of this command removes the authentication key.

Parameter	Description
<KEY-ID>	Specifies the authentication key ID. Range: 1 to 65534.
md5	Selects MD5 key encryption.
sha1	Specifies SHA1 key encryption.
<PLAINTEXT-KEY>	Specifies the plaintext authentication key. Range: 8 to 40 characters. The key may contain printable ASCII characters excluding "#" or be entered in hex. Keys longer than 20 characters are assumed to be hex. To use an ASCII key longer than 20 characters, convert it to hex.
trusted	Specifies that this is a trusted key. When NTP authentication is enabled, the switch only synchronizes with time servers that transmit packets containing a trusted key.

Parameter	Description
ciphertext <ENCRYPTED-KEY>	Specifies the ciphertext authentication key in Base64 format. This is used to restore the NTP authentication key when copying configuration files between switches or when uploading a previously saved configuration. NOTE: When the key is not provided on the command line, plaintext key prompting occurs upon pressing Enter, followed by prompting as to whether the key is to be trusted. The entered key characters are masked with asterisks.

Examples

Defining key 10 with MD5 encryption and a provided plaintext trusted key:

```
switch(config)# ntp authentication-key 10 md5 F82#450b trusted
```

Defining key 5 with SHA1 encryption and a prompted plaintext trusted key:

```
switch(config)# ntp authentication-key 5 sha1
Enter the NTP authentication key: *****
Re-Enter the NTP authentication key: *****

Configure the key as trusted (y/n)? y
```

Removing key 10:

```
switch(config)# no ntp authentication-key 10
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp disable

ntp disable

Description

Disables the NTP client on the switch. The NTP client is disabled by default.

Examples

Disabling the NTP client.

```
switch(config)# ntp disable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp enable

```
ntp enable  
no ntp enable
```

Description

Enables the NTP client on the switch to automatically adjust the local time and date on the switch. The NTP client is disabled by default.

The `no` form of this command disables the NTP client.

Examples

Enabling the NTP client.

```
switch(config)# ntp enable
```

Disabling the NTP client.

```
switch(config)# no ntp enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp server

```
ntp server <IP-ADDR> [key <KEY-NUM>] [minpoll <MIN-NUM>] [maxpoll <MAX-NUM>] [burst | iburst]
[prefer] [version <VER-NUM>]
no ntp server <IP-ADDR> <IP-ADDR> [key <KEY-NUM>] [minpoll <MIN-NUM>] [maxpoll <MAX-NUM>]
[burst | iburst] [prefer] [version <VER-NUM>]
```

Description

Defines an NTP server to use for time synchronization, or updates the settings of an existing server with new values. Up to eight servers can be defined.

The `no` form of this command removes a configured NTP server.



The default NTP version is 4; it is backwards compatible with version 3.

Parameter	Description
<code>server <IP-ADDR></code>	Specifies the address of an NTP server as a DNS name, an IPv4 address (x.x.x.x), where x is a decimal number from 0 to 255, or an IPv6 address (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F. When specifying an IPv4 address, you can remove leading zeros. For example, the address 192.169.005.100 becomes 192.168.5.100. When specifying an IPv6 address, you can use two colons (::) to represent consecutive zeros (but only once), remove leading zeros, and collapse a hextet of four zeros to a single 0. For example, this address 2222:0000:3333:0000:0000:0000:4444:0055 becomes 2222:0:3333::4444:55.
<code>key <KEY-NUM></code>	Specifies the key to use when communicating with the server. A trusted key must be defined with the command <code>ntp authentication-key</code> and authentication must be enabled with the command <code>ntp authentication</code> . Range: 1 to 65534.
<code>minpoll <MIN-NUM></code>	Specifies the minimum polling interval in seconds, as a power of 2. Range: 4 to 17. Default: 6 (64 seconds).
<code>maxpoll <MAX-NUM></code>	Specifies the maximum polling interval in seconds, as a power of 2. Range: 4 to 17. Default: 10 (1024 seconds).
<code>burst</code>	Send a burst of packets instead of just one when connected to the server. Useful for reducing phase noise when the polling interval is long.
<code>iburst</code>	Send a burst of six packets when not connected to the server. Useful for reducing synchronization time at startup.
<code>prefer</code>	Make this the preferred server.

Parameter	Description
<code>version <VER-NUM></code>	Specifies the version number to use for all outgoing NTP packets. Range: 3 or 4. Default: 4. NOTE: NTP is backwards compatible.

Usage

For features such as Activate and ZTP, a switch that has a factory default configuration will automatically be configured with pool.ntp.org. NTP server configurations via DHCP options are supported. The DHCP server can be configured with maximum of two NTP server addresses which will be supported on the switch. Only IPV4 addresses are supported.

NTP uses a stratum to describe the distance between a network device and an authoritative time source:

- A stratum 1 time server is directly attached to an authoritative time source (such as a radio or atomic clock or a GPS time source).
- A stratum 2 NTP server receives its time through NTP from a stratum 1 time server.

When using multiple servers with same stratum setting, the best practice to configure a preferred server, so NTP will attempt to use the preferred server as the primary NTP connection. If a preferred server is not manually set when NTP is enabled, the configured server with the lowest stratum will automatically be set as the preferred server. If there are servers with the same stratum, this auto prefer status will prevent AOS-CX from toggling between different servers as the primary server. Auto prefer selection of servers with same stratum (if not manually selected) may change after reconfiguring the switch, or after executing the `reboot` command.

Examples

Defining the ntp server pool.ntp.org, using iburst, and NTP version 4.

```
switch(config)# ntp server pool.ntp.org iburst version 4
```

Removing the ntp server pool.ntp.org.

```
switch(config)# no ntp server pool.ntp.org
```

Defining the ntp server my-ntp.mydomain.com and makes it the preferred server.

```
switch(config)# ntp server my-ntp.mydomain.com prefer
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp trusted-key

```
ntp trusted-key <KEY-ID>
no ntp trusted-key <KEY-ID>
```

Description

Sets a key as trusted. When NTP authentication is enabled, the switch only synchronizes with time servers that transmit packets containing a trusted key.

The `no` form of this command removes the trusted designation from a key.

Parameter	Description
<KEY-ID>	Specifies the identification number of the key to set as trusted. Range: 1 to 65534.

Examples

Defining key 10 as a trusted key.

```
switch(config)# ntp trusted-key 10
```

Removing trusted designation from key 10:

```
switch(config)# no ntp trusted-key 10
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ntp vrf

```
ntp vrf <VRF-NAME>
no ntp vrf <VRF-NAME>
```

Description



6000 and 6100 only support default VRF.



4100i only supports default VRF.

Specifies the VRF on which the NTP client communicates with an NTP server.
The `no` form of the command returns to default VRF.

Parameter	Description
<code><VRF-NAME></code>	Specifies the name of a VRF.

Example

Setting the switch to use the default VRF for NTP client traffic.

```
switch(config)# ntp vrf default
```

Returning the switch to use the default VRF for NTP client traffic.

```
switch(config)# no ntp vrf
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

show ntp associations

```
show ntp associations
```

Description

Shows the status of the connection to each NTP server. The following information is displayed for each server:

- Tally code : The first character is the Tally code:
 - (blank): No state information available (e.g. non-responding server)
 - x : Out of tolerance (discarded by intersection algorithm)
 - . : Discarded by table overflow (not used)
 - - : Out of tolerance (discarded by the cluster algorithm)

- + : Good and a preferred remote peer or server (included by the combine algorithm)
- # : Good remote peer or server, but not utilized (ready as a backup source)
- * : Remote peer or server presently used as a primary reference
- o : PPS peer (when the prefer peer is valid)
- ID: Server number.
- NAME: NTP server FQDN/IP address (Only the first 24 characters of the name are displayed).
- REMOTE: Remote server IP address.
- REF_ID: Reference ID for the remote server (Can be an IP address).
- ST: (Stratum) Number of hops between the NTP client and the reference clock.
- LAST: Time since the last packet was received in seconds unless another unit is indicated.
- POLL: Interval (in seconds) between NTP poll packets. Maximum (1024) reached as server and client sync.
- REACH: 8-bit octal number that displays status of the last eight NTP messages (377 = all messages received).

Example

```
switch# show ntp associations
```

ID	NAME	REMOTE	REF-ID	ST	LAST	POLL	REACH
1	192.0.1.1	192.0.1.1	.INIT.	16	-	64	0
* 2	time.apple.com	17.253.2.253	.GPSs.	2	70	128	377

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ntp authentication-keys

```
show ntp authentication-keys
```

Description

Shows the currently defined authentication keys.

Examples

```
switch# show ntp authentication-keys
```

```
-----  
Auth key  Trusted  MD5 password  
-----  
10        No      *****  
20        Yes     *****
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show ntp servers

```
show ntp servers
```

Description

Shows all configured NTP servers, including any DHCP servers, default pool servers or any server with the status **auto prefer**.

Example

```
switch# show ntp servers
```

```
-----  
NTP SERVER KEYID MINPOLL MAXPOLL OPTION VER  
-----  
192.0.1.18    -      5      10 iburst  3  
192.0.1.19    -      6      10  none   4  
192.0.1.20    -      6       8  burst   3 prefer  
-----
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ntp statistics

show ntp statistics

Description

Shows global NTP statistics. The following information is displayed:

- Rx-pkts: Total NTP packets received.
- Current Version Rx-pkts: Number of NTP packets that match the current NTP version.
- Old Version Rx-pkts: Number of NTP packets that match the previous NTP version.
- Error pkts: Packets dropped due to all other error reasons.
- Auth-failed pkts: Packets dropped due to authentication failure.
- Declined pkts: Packets denied access for any reason.
- Restricted pkts: Packets dropped due to NTP access control.
- Rate-limited pkts: Number of packets discarded due to rate limitation.
- KOD pkts: Number of Kiss of Death packets sent.

Examples

```
switch(config)# show ntp statistics
Rx-pkts 100
Current Version Rx-pkts 80
Old Version Rx-pkts 20
Err-pkts 2
Auth-failed-pkts 1
Declined-pkts 0
Restricted-pkts 0
Rate-limited-pkts 0
KoD-pkts 0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ntp status

show ntp status

Description

Shows the status of NTP on the switch.

Examples

Displaying the status information when the switch is not synced to an NTP server:

```
switch# show ntp status
NTP is enabled.
NTP authentication is enabled.
NTP is using the default VRF for NTP server connections.

Wed Nov 23 23:29:10 PDT 2016
NTP uptime: 187 days, 1 hours, 37 minutes, 48 seconds

Not synchronized with an NTP server.
```

Displaying the status information when the switch is synced to an NTP server:

```
switch# show ntp status
NTP is enabled.
NTP authentication is enabled.
NTP is using the default VRF for NTP server connections.

Wed Nov 23 23:29:10 PDT 2016
NTP uptime: 187 days, 1 hours, 37 minutes, 48 seconds

Synchronized to NTP Server 17.253.2.253 at stratum 2.
Poll interval = 1024 seconds.
Time accuracy is within 0.994 seconds
Reference time: Thu Jan 28 2016 0:57:06.647 (UTC)
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Configuring a layer 2 interface

Procedure

1. Change to the interface configuration context for the interface with the command `interface`.
2. Set the interface MTU (maximum transmission unit) with the command `mtu`.
3. Review interface configuration settings with the command `show interface`.

Single source IP address

Certain IP-based protocols used by the switch (such as RADIUS, sFlow, TACACS, and TFTP), use a client-server model in which the client's source IP address uniquely identifies the client in packets sent to the server. By default, the source IP address is defined as the IP address of the outgoing switch interface on which the client is communicating with the server. Since the switch can have multiple routing interfaces, outgoing packets can potentially be sent on different paths at different times. This can result in different source IP addresses being used for a client, which can create a client identification problem on the server. For example, it can be difficult to interpret system logs and accounting data on the server when the same client is associated with multiple IP addresses.

To resolve this issue, you can use the commands `ip source-interface` and `ipv6 source-interface` to define a single source IP address that applies to all supported protocols (RADIUS, sFlow, TACACS, and TFTP), or an individual address for each protocol. This ensures that all traffic sent by a client to a server uses the same IP address.

Priority-based flow control

Priority-based flow control (PFC) is defined in the IEEE 802.1 Qbb standard. It is a link-level flow control mechanism intended to eliminate packet loss due to congestion on a network link.

For interfaces that auto-negotiate, link-level flow control is subject to negotiation, along with speed and other parameters. Both ends of the link must negotiate the same flow control mode for it to be applied.

For interfaces that do not auto-negotiate, the configured link-level flow control mode is always applied and the user is responsible for ensuring that both ends of the link are configured for the same mode.

Unsupported transceiver support

Transceiver products (optical, DAC, AOCs) that are listed as supported by a switch model are detailed in the *Transceiver Guide*. Transceiver products that are not listed, are considered unsupported; this would include transceivers that are:

- Non-Aruba branded products
- HPE branded products that were designed for non-AOS-CX switch models (e.g. Comware)

- HPE branded products designated for use in HPE Compute Servers or Storage
- Transceivers originally designated for use in Aruba WLAN controllers or former Mobility Access Switch (MAS) products
- End-of-life Aruba Transceivers

The unsupported transceiver mode (UT-mode) is designed to allow the possible use of these unsupported products. Not all unsupported products can be recognized and enabled; they may be unable to be identified (do not follow the proper MSA standards for identification). These unsupported transceiver products are enabled only on a best-effort basis and there are no guarantees implied for their continued operation.

This feature is enabled by default. A periodic system log will be generated by default at an interval of 24 hours listing the ports on which unsupported transceivers are present. The log interval is configurable and can be disabled by setting the log-interval to `none`.

Interface commands

allow-unsupported-transceiver

```
allow-unsupported-transceiver [confirm | log-interval {none | <INTERVAL>}]
no allow-unsupported-transceiver
```

Description

Allows unsupported transceivers to be enabled or establish connections. Only 1G and 10G transceivers are enabled by this command, unsupported transceivers of other speeds will remain disabled.



As of AOS-CX 10.06.0100, this command is enabled by default, allowing the use of third party transceiver products without adding the command in the config. Disabling this command with the `no` form will now display the command in the running and stored configurations.

The `no` form of this command disallows using unsupported transceivers.

Parameter	Description
<code>confirm</code>	Specifies that unsupported transceiver warnings are to be automatically confirmed.
<code>log-interval none</code>	Disables unsupported transceiver logging.
<code>log-interval <INTERVAL></code>	Sets the unsupported transceiver logging interval in minutes. Default: 1440 minutes. Range: 1440 to 10080 minutes.

Usage

When none of the parameters are specified it will display a warning message to accept the warranty terms. With `confirm` option the warning message is displayed but the user is not prompted to `(y/n)` answering. Warranty terms must be agreed to as part of enablement and the support is on best effort basis.

Examples

Allowing unsupported transceivers with follow-up confirmation:

```
switch(config)# allow-unsupported-transceiver
Warning: The use of unsupported transceivers, DACs, and AOCs is at your
own risk and may void support and warranty. Please see HPE Warranty terms
and conditions.

Do you agree and do you want to continue (y/n)? y
```

Allowing unsupported transceivers with confirmation in command syntax:

```
switch(config)# allow-unsupported-transceiver confirm
Warning: The use of unsupported transceivers, DACs, and AOCs is at your
own risk and may void support and warranty. Please see HPE Warranty terms
and conditions.
```

Configuring unsupported transceiver logging with an interval of every 48 hours:

```
switch(config)# allow-unsupported-transceiver log-interval 2880
```

Disabling unsupported transceiver logging:

```
switch(config)# allow-unsupported-transceiver log-interval none
```

Disallowing unsupported transceivers with follow-up confirmation:

```
switch(config)# no allow-unsupported-transceiver
Warning: Unsupported transceivers, DACs, and AOCs will be disabled,
which could impact network connectivity. Use 'show allow-unsupported-transceiver'
to identify unsupported transceivers, DACs, and AOCs.

Continue (y/n)? y
```

Disallowing unsupported transceivers with confirmation in command syntax:

```
switch(config)# no allow-unsupported-transceiver confirm
Warning: Unsupported transceivers, DACs, and AOCs will be disabled,
which could impact network connectivity. Use 'show allow unsupported-transceiver'
to identify unsupported transceivers, DACs, and AOCs.

switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6100	config	Administrators or local user group members with execution rights for this command.

default interface

default interface <INTERFACE-ID>

Description

Sets an interface (or a range of interfaces) to factory default values.

Parameter	Description
<INTERFACE-ID>	Specifies the ID of a single interface or range of interfaces. Format: member/slot/port or member/slot/port-member/slot/port to specify a range.

Examples

Resetting an interface:

```
switch(config)# default default interface 1/1/1
```

Resetting an range of interfaces:

```
switch(config)# default default interface 1/1/1-1/1/10
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

description

description <DESCRIPTION>
no description

Description

Associates descriptive information with an interface to help administrators and operators identify the purpose or role of an interface.

The `no` form of this command removes a description from an interface.

Parameter	Description
<DESCRIPTION>	Specify a description for the interface. Range: 1 to 64 ASCII characters (including space, excluding question mark).

Examples

Setting the description for an interface to **DataLink 01**:

```
switch(config-if) # description DataLink 01
```

Removing the description for an interface.

```
switch(config-if) # no description
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

energy-efficient-ethernet

energy-efficient-ethernet

Description

Enables auto-negotiation of Energy-Efficient Ethernet (EEE) on an interface. EEE Negotiation is established only on auto-link negotiation with supported link partners.

Examples

Configuring an interface:

```
switch(config) # interface 1/1/1
switch(config-if) # energy-efficient-ethernet
```

Disabling Energy Efficient Ethernet on an interface:

```
switch(config) # interface 1/1/1
switch(config-if) # no energy-efficient-ethernet
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

flow-control

```
flow-control rxtx
no flow-control rxtx
```

Description

Enables negotiation of IEEE 802.3x link-level flow control on the current interface. The switch advertises link-level flow-control support to the link partner. The final configuration is determined based on the capabilities of both partners.

The `no` form disables flow control support on the current interface.

Parameter	Description
<code>rxtx</code>	Enables the ability to respect and generate IEEE 802.3x link-level pause frames on the current interface.

Usage

Care must be taken to ensure proper lossless flow control operation:

- Lossless flow control will only operate correctly when both the ingress and egress interfaces have flow control enabled.
- All members of a LAG must have the same flow control configuration.
- Lossless flow control is only supported for single destination unicast traffic. Replicated traffic (e.g. broadcast, multicast, mirroring) cannot be guaranteed to be lossless.
- Lossless behavior is not supported when operating in a VSF stack configuration.
- Any queue used by protocol or control traffic must not be configured for lossless behavior. Routing protocols and VSX-synchronization messages use local-priority 7, therefore the CoS priority mapped to local-priority 7 should not be used in any lossless configuration.
For example, in a default configuration, the CoS map assigns local-priority 7 to packets arriving with VLAN priority 7. This means that lossless pools should not be configured to use priority 7, and that interfaces should not be configured with 'flow-control priority 7', since that VLAN priority maps to local-priority 7.

Examples

Enable support for RX and TX flow control:

```
switch(config)# interface 1/1/1
switch(config-if)# flow-control rxtx
```

Disable support for RX and TX flow control:

```
switch(config)# interface 1/1/1
switch(config-if)# no flow-control rxtx
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

interface

interface <PORT-NUM>

Description

Switches to the `config-if` context for a physical port. This is where you define the configuration settings for the logical interface associated with the physical port.

Parameter	Description
<PORT-NUM>	Specifies a physical port number. Format: member/slot/port.

Examples

Configuring an interface:

```
switch(config)# interface 1/1/1
switch(config-if)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

interface vlan

```
interface vlan <VLAN-ID>
no interface vlan <VLAN-ID>
```

Description

Creates an interface VLAN also know as an SVI (switched virtual interface) and changes to the `config-if-vlan` context. The specified VLAN must already be defined on the switch.

The `no` form of this command deletes an interface VLAN.

Parameter	Description
<VLAN-ID>	Specifies the interface ID. Range: 2 to 4094

Examples

```
switch# config
switch(config)# vlan 10
switch(config-vlan-10)# exit
switch(config)# interface vlan 10
switch(config-if-vlan)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ip address

```
ip address <IPV4-ADDR>/<MASK> [secondary]
no ip address <IPV4-ADDR>/<MASK> [secondary]
```

Description

Sets an IP/IPv6 address on the interface VLAN.

The `no` form of this command removes the IP/IPv6 address from the interface.

Parameter	Description
<IPv4-ADDR>	Specifies an IP address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255. You can remove leading zeros. For example, the address 192.169.005.100 becomes 192.168.5.100.
<MASK>	Specifies the number of bits in the address mask in CIDR format (x), where x is a decimal number from 0 to 128.
secondary	Specifies a secondary IP address.

Examples

Assigning the IP address **192.168.199.1** with a mask of **24** bits to interface VLAN **10**:

```
switch(config)# interface vlan 10
switch(config-if-vlan)# ip address 192.168.199.1/24
```

Removing the IP address **192.168.199.1** with a mask of **24** bits from interface VLAN **10**:

```
switch(config)# interface vlan 10
switch(config-if-vlan)# no ip address 192.168.199.1/24
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if-vlan	Administrators or local user group members with execution rights for this command.

ip mtu

ip mtu <VALUE>

no ip mtu

Description

Sets the IP MTU (maximum transmission unit) for an interface. This defines the largest IP packet that can be sent or received by the interface.

The **no** form of this command sets the IP MTU to the default value 1500.

Parameter	Description
<VALUE>	Specifies the IP MTU in bytes. Range: 68 to 9198. Default: 1500.

Examples

Setting the IP MTU to 576 bytes:

```
switch(config-if-vlan)# ip mtu 576
```

Command History

Release	Modification
10.08	Subinterface support added.
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if-vlan	Administrators or local user group members with execution rights for this command.

ip source-interface

```
ip source-interface {sflow | tftp | radius | tacacs | ntp | syslog | simplivity | dns |  
all} {interface <IFNAME> | <IPV4-ADDR>} [vrf <VRF-NAME>]  
no ip source-interface {sflow | tftp | radius | tacacs | ntp | syslog | simplivity | dns |  
all} [interface <IFNAME> | <IPV4-ADDR>] [vrf <VRF-NAME>]
```

Description

Sets a single source IP address for a feature on the switch. This ensures that all traffic sent the feature has the same source IP address regardless of how it egresses the switch. You can define a single global address that applies to all supported features, or an individual address for each feature.

This command provides two ways to set the source IP addresses: either by specifying a static IP address, or by using the address assigned to a switch interface. If you define both options, then the static IP address takes precedence.

The `no` form of this command deletes the single source IP address for all supported services, or a specific service.

Parameter	Description
sflow tftp radius tacacs ntp syslog simplivity dns all	Sets a single source IP address for a specific service. The <code>all</code> option sets a global address that applies to all protocols that do not have an address set.
interface <IFNAME>	Specifies the name of the interface from which the specified service obtains its source IP address. The interface must have a valid IP address assigned to it. If the interface has both a primary and secondary IP address, the primary IP address is used.

Parameter	Description
<IPv4-ADDR>	Specifies the source IP address to use for the specified service. The IP address must be defined on the switch, and it must exist on the specified VRF (which is the <code>default</code> VRF, if the <code>vrf</code> option is not used). Specify the address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

Examples

Setting the IPv4 address 10.10.10.5 as the global single source address:

```
switch# config
switch(config)# ip source-interface all 10.10.10.5
```

Clearing the global single source IP address **10.10.10.5**:

```
switch(config)# no ip source-interface all 10.10.10.5
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ipv6 address

```
ipv6 address <IPv6-ADDR>/<MASK>{eui64 | [tag <ID>]}
no ipv6 address <IPv6-ADDR>/<MASK>
```

Description

Sets an IPv6 address on the interface.

The `no` form of this command removes the IPv6 address on the interface.



This command automatically creates an IPv6 link-local address on the interface. However, it does not add the `ipv6 address link-local` command to the running configuration. If you remove the IPv6 address, the link-local address is also removed. To maintain the link-local address, you must manually execute the `ipv6 address link-local` command.

Parameter	Description
<IPv6-ADDR>	Specifies the IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F. You can use two colons (::) to represent consecutive zeros (but only once), remove leading zeros, and collapse a hextet of four zeros to a single 0. For example, this address 2222:0000:3333:0000:0000:0000:4444:0055 becomes 2222:0:3333::4444:55.
<MASK>	Specifies the number of bits in the address mask in CIDR format (x), where x is a decimal number from 0 to 128.
eui64	Configure the IPv6 address in the EUI-64 bit format.
tag <ID>	Configure route tag for connected routes. Range: 0 to 4294967295. Default: 0.

Examples

Setting the IPv6 address **2001:0db8:85a3::8a2e:0370:7334** with a mask of 24 bits:

```
switch(config-if)# ipv6 address 2001:0db8:85a3::8a2e:0370:7334/24
```

Removing the IP address 2001:0db8:85a3::8a2e:0370:7334 with mask of 24 bits:

```
switch(config-if)# no ipv6 address 2001:0db8:85a3::8a2e:0370:7334/24
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

ipv6 source-interface

```
ipv6 source-interface {sflow | tftp | radius | tacacs | ntp | syslog | simplivity | dns | all} {interface <IFNAME> | <IPv6-ADDR>}
no ipv6 source-interface {sflow | tftp | radius | tacacs | ntp | syslog | simplivity | dns | all} [interface <IFNAME> | <IPv6-ADDR>]
```

Description

Sets a single source IP address for a feature on the switch. This ensures that all traffic sent the feature has the same source IP address regardless of how it egresses the switch. You can define a single global address that applies to all supported features, or an individual address for each feature.

This command provides two ways to set the source IP addresses: either by specifying a static IP address, or by using the address assigned to a switch interface. If you define both options, then the static IP address takes precedence.

The `no` form of this command deletes the single source IP address for all supported protocols, or a specific protocol.

Parameter	Description
<code>sflow tftp radius tacacs ntp syslog simplivity dns all</code>	Sets a single source IP address for a specific protocol. The <code>all</code> option sets a global address that applies to all protocols that do not have an address set.
<code>interface <IFNAME></code>	Specifies the name of the interface from which the specified protocol obtains its source IP address.
<code><IPv6-ADDR></code>	Specifies the source IP address to use for the specified protocol. The IP address must be defined on the switch, and it must exist on the specified VRF (which is the <code>default</code> VRF). Specify the IP address in IPv6 format (<code>xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx</code>), where <code>x</code> is a hexadecimal number from 0 to F.

Examples

Configuring the IPv6 address `2001:DB8::1` as the global single source address:

```
switch# config
switch(config)# ip source-interface all 2001:DB8::1/32
```

Stop the source IP address from using the IP address on interface **1/1/1** on VRF `default`.

```
switch(config)# no ip source-interface all interface 1/1/1 vrf default
```

Clear the source IP address `2001:DB8::1`.

```
switch(config)# no ip source-interface all 2001:DB8::1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

mtu

```
mtu <VALUE>
no mtu
```

Description

Sets the MTU (maximum transmission unit) for an interface. This defines the maximum size of a layer 2 (Ethernet) frame. Frames larger than the MTU (1500 bytes by default) are dropped.

To support jumbo frames (frames larger than 1522 bytes), increase the MTU as required by your network. A frame size of up to 9198 bytes is supported.

The largest possible layer 1 frame will be 18 bytes larger than the MTU value to allow for link layer headers and trailers.

The `no` form of this command sets the MTU to the default value 1500.

Parameter	Description
<VALUE>	Specifies the MTU in bytes. Range: 46 to 9198. Default: 1500.

Examples

Setting the MTU on interface **1/1/1** to 1000 bytes:

```
switch(config)# interface 1/1/1
switch(config-if)# no routing
switch(config-if)# mtu 1000
```

Setting the MTU on interface **1/1/1** to the default value:

```
switch(config)# interface 1/1/1
switch(config-if)# no routing
switch(config-if)# no mtu
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

persona

```
persona {access | uplink | custom <PERSONA>}
no persona
```

Description

Associates one of three persona types with an interface to classify the purpose or role of an interface. On the 10000 Switch Series, “access” persona ports are typically connected to workloads / VMs, and the “uplink” (fabric) persona ports are connected to the core / spine.

The `no` form of this command removes the interface persona.

Parameter	Description
<code>access</code>	Selects the access persona type.
<code>uplink</code>	Selects the uplink persona type.
<code>custom <PERSONA></code>	Selects the custom persona type with a user-provided name. Range: 1 to 64 printable ASCII characters including space.

Examples

Configuring an access persona:

```
switch(config-if) # persona access
```

Configuring an uplink persona:

```
switch(config-if) # persona uplink
```

Configuring a custom persona:

```
switch(config-if) # persona custom special
```

Removing the persona setting.

```
switch(config-if) # no persona
```

Command History

Release	Modification
10.09	Command introduced.

Command Information

Platforms	Command context	Authority
All platforms	<code>config-if</code>	Administrators or local user group members with execution rights for this command.

show allow-unsupported-transceiver

```
show allow-unsupported-transceiver
```

Description

Displays configuration and status of unsupported transceivers.

Examples

Showing unallowed unsupported transceivers:

```
switch(config)# show allow-unsupported-transceiver

Allow unsupported transceivers : no
Logging interval               : 1440 minutes

-----
Port      Type      Status
-----
1/1/31    SFP-SX     unsupported
1/1/32    SFP-1G-BXD unsupported
1/1/2     SFP28DAC3  unsupported
```

Showing allowed unsupported transceivers:

```
switch# show allow-unsupported-transceiver

Allow unsupported transceivers : yes
Logging interval               : 1440 minutes

-----
Port      Type      Status
-----
1/1/31    SFP-SX     unsupported-allowed
1/1/32    SFP-1G-BXD unsupported-allowed
1/1/2     SFP28DAC3  unsupported
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show interface

```
show interface [<IFNAME>|<IFRANGE>] [brief | physical | extended [non-zero]]
show interface [lag | vlan ] [<ID>] [brief | physical]
show interface [lag | vlan ] [<ID>] [extended [non-zero]]
```

Description

Shows active configurations and operational status information for interfaces.

Parameter	Description
<IFNAME>	Specifies a interface name.
<IFRANGE>	Specifies the port identifier range.
brief	Shows brief info in tabular format.
physical	Shows the physical connection info in tabular format.
extended	Shows additional statistics.
non-zero	Shows only non zero statistics.
LAG	Shows LAG interface information.
VLAN	Shows VLAN interface information.
<LAG-ID>	Specifies the LAG number. Range: 1-256
<VLAN-ID>	Specifies the VLAN ID. Range: 1-4094

Examples

The following example shows when interface 1/1/1 is configured:

```
switch# show interface 1/1/1
Interface 1/1/1 is up
Admin state is up
Link state: up for 1 minute (since Thu Nov 26 10:26:34 UTC 2020)
Link transitions: 3
Description:
Hardware: Ethernet, MAC Address: 88:3a:30:47:d1:df
MTU 1500
Type 1GbT
Full-duplex
qos trust cos
Speed 1000 Mb/s
Auto-negotiation is on
Energy-Efficient Ethernet is disabled
Flow-control: off
Error-control: off
MDI mode: MDIX
VLAN Mode: native-untagged
Native VLAN: 1
Allowed VLAN List: all
Rate collection interval: 300 seconds
```

Rates	RX	TX	Total (RX+TX)
Mbits / sec	0.00	0.00	0.00
KPkts / sec	0.00	0.00	0.00
Unicast	0.00	0.00	0.00
Multicast	0.00	0.00	0.00
Broadcast	0.00	0.00	0.00
Utilization %	0.00	0.00	0.00

Statistics	RX	TX	Total
Packets	0	0	0

Unicast	0	0	0
Multicast	0	0	0
Broadcast	0	0	0
Bytes	0	0	0
Jumbos	0	0	0
Dropped	0	0	0
Filtered	0	0	0
Pause Frames	0	0	0
Errors	0	0	0
CRC/FCS	0	n/a	0
Collision	n/a	0	0
Runts	0	n/a	0
Giants	0	n/a	0

When the interface is currently linked at a downshifted speed:

```
switch(config-if)# show interface 1/1/1

Interface 1/1/1 is up
...
Auto-negotiation is on with downshift active
```

When the interface is currently linked with energy-efficient-ethernet negotiated:

```
switch(config-if)# show interface 1/1/1

Interface 1/1/1 is up
...
Energy-Efficient Ethernet is enabled and active
```

When the interface is configured with EEE and the EEE has auto-negotiated:

```
switch(config-if)# show interface 1/1/1 physical

-----
-----
-----
EEE      PoE Power      Link      Admin      Speed      Flow-Control
Port      Type      (Watts)   Status    Config    Status | Config    Port
Status | Config      State Information    Status | Config    Status | Config
Description
-----
-----
1/1/1    1GbT      up        up        1G        auto      off      off      on
on      --      10M/100M/1G
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface dom

show interface [<INTERFACE-ID>] dom [detail]

Description

Shows diagnostics information and alarm/warning flags for the optical transceivers (SFP, SFP+). This information is known as DOM (Digital Optical Monitoring). DOM information also consists of vendor determined thresholds which trigger high/low alarms and warning flags.

Parameter	Description
<INTERFACE-ID>	Specifies an interface. Format: member/slot/port.
detail	Show detailed information.

Example

```
switch# show interface dom
```

Port	Type	Channel	Temperature (Celsius)	Voltage (Volts)	Tx Bias (mA)	Rx Power (mW/dBm)	Tx Power (mW/dBm)
1/1/1	SFP+SR		47.65	3.31	8.40	0.08, -10.96	0.63, -2.49
1/1/2	SFP+SR		n/a	n/a	n/a	n/a	n/a
1/1/3	SFP+DA3		42.10	3.24	n/a	n/a	n/a
1/1/4	QSFP+SR4	1	44.46	3.30	6.12	0.08, -10.96	0.63, -1.95
		2	44.46	3.30	6.04	0.08, -10.96	0.63, -2.00
		3	44.46	3.30	6.51	0.08, -10.96	0.60, -2.16
		4	44.46	3.30	6.19	0.08, -10.96	0.63, -1.94

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface energy-efficient ethernet

show interface [<IFNAME>|<IFRANGE>] energy-efficient-ethernet

Description

Displays Energy-Efficient Ethernet information for the interface.

Parameter	Description
<IFNAME>	Specifies the name of an interface on the switch. Use the format member/slot/port (for example, 1/1/1).
<IFRANGE>	Specifies the port identifier range of an interface on the switch. Use the format member/slot/port (for example, 1/1/1).

Example

The following example shows when the interfaces are Energy-Efficient Ethernet capable

```
switch# show interface energy-efficient-ethernet
```

Port	Enabled	Negotiated	Speed (MB/s)	TX Wake Time (us)	RX Wake Time (us)
1/1/1	no	no	--	--	--
1/1/2	yes	yes	100	36	36
1/1/3	yes	yes	1000	17	17
1/1/4	no	no	--	--	--
1/1/5	yes	no	1000	--	--

```
switch# show interface 1/1/1 energy-efficient-ethernet
```

Port	Enabled	Negotiated	Speed (Mb/s)	TX Wake Time (us)	RX Wake Time (us)
1/1/1	no	no	1000	--	--

```
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface flow-control

```
show interface [<IFNAME>|<IFRANGE>] flow-control [detail]
```

Description

Displays the flow control configuration, status, and statistics of the specified interface.



If `detail` is not specified, the command displays a summary of all flow controlled interfaces with one interface per line. If `detail` is specified, the command displays details and statistics about flow control in a long form on the specified interfaces.

Parameter	Description
<code><IFNAME></code>	Specifies an interface name.
<code><IFRANGE></code>	Specifies the port identifier range.
<code>detail</code>	Show details and statistics of flow control.

Examples

Showing interfaces with flow control enabled in config or status :

```
switch# show interface flow-control
-----
Port          Flow Control  Flow Control
              Config    Status
-----
1/1/1         rxtx         rxtx
1/1/2         rxtx         off
```

Showing all interfaces in detail form:

```
switch# show interface flow-control detail
Interface 1/1/1 is up
Admin state is up
Flow-control: off

Interface 1/1/2 is up
Admin state is up
Flow-control: off

...
```

Showing RXTX enabled flow control:

```
switch# show interface 1/1/1 flow-control detail
Interface 1/1/1 is up
Admin state is up
Flow-control: rxtx

Statistics                               RX          TX
-----
Dot3 Pause Frames                        0           0
```

Command History

Release	Modification
10.08	Command introduced.

Command Information

Platforms	Command context	Authority
4100 6000 6100	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show interface transceiver

`show interface [<INTERFACE-ID>] transceiver [detail | threshold-violations]`

Description

Displays information about transceivers present in the switch. The information shown varies for different transceiver types and manufacturers. Only basic information is shown for unsupported HPE and third-party transceivers installed in the switch and they are also identified with an asterisk in the output.

Parameter	Description
<INTERFACE-ID>	Specifies the name or range of an interface on the switch. Use the format member/slot/port (for example, 1/3/1).
detail	Show detailed information for the interfaces.
threshold-violations	Show threshold violations for transceivers.

Example

Showing summary transceiver information with identification of unsupported transceivers:

```
switch(config)# show interface transceiver
```

```
-----
Port      Type      Product   Serial    Part
Number    Number   Number
-----
1/1/15    SFP+SR    J9150D    xxxxxxxxxx 1990-4634
1/1/16    SFP+SR    J9150D    xxxxxxxxxx 1990-4634
```

Showing detailed transceiver information:

```
switch(config)# show interface transceiver detail
```

```
Transceiver in 1/1/15
Interface Name      : 1/1/15
Type                : SFP+SR
Connector Type      : LC
Wavelength          : 850nm
Transfer Distance    : 0.00km (SMF), 20m (OM1), 80m (OM2), 300m (OM3)
Diagnostic Support   : DOM
Product Number      : J9150D
Serial Number       : xxxxxxxxxx
```


Part Number : 1990-4634

Status

Temperature : 30.38C
Voltage : 3.26V
Tx Bias : 5.54mA
Rx Power : 0.56mW, -2.52dBm
Tx Power : 0.62mW, -2.08dBm

Recent Alarms:

Recent Errors:

Transceiver in 1/1/16

Interface Name : 1/1/16
Type : SFP+SR
Connector Type : LC
Wavelength : 850nm
Transfer Distance : 0.00km (SMF), 20m (OM1), 80m (OM2), 300m (OM3)
Diagnostic Support : DOM
Product Number : J9150D
Serial Number : xxxxxxxxxxxx
Part Number : 1990-4634

Status

Temperature : 30.62C
Voltage : 3.28V
Tx Bias : 5.64mA
Rx Power : 0.61mW, -2.15dBm
Tx Power : 0.59mW, -2.29dBm

Recent Alarms:

Recent Errors:

Showing detailed transceiver information with identification of unsupported transceivers:

switch# **show interface transceiver detail**

Transceiver in 1/1/2

Interface Name : 1/1/2
Type : SFP+ER (unsupported)
Connector Type : LC
Wavelength : 3590nm
Transfer Distance : 80m (SMF), 0m (OM1), 0m (OM2), 0m (OM3)
Diagnostic Support : DOM
Vendor Name : INNOLIGHT
Vendor Part Number : TR-PX15Z-NHP
Vendor Part Revision: 1A
Vendor Serial number: MYxxxxxxxx

Status

Temperature : 28.88C
Voltage : 3.30V
Tx Bias : 65.53mA
Rx Power : 0.00mW, -inf
Tx Power : 1.47mW, 1.67dBm

Recent Alarms:

Rx Power low alarm
Rx Power low warning

```
Recent Errors:
Rx loss of signal
```

Showing transceiver threshold-violations:

```
switch(config)# show interface transceiver threshold-violations
-----
Port          Type          Channel#  Recent Threshold Violations
-----
1/1/15        SFP+SR                none
1/1/16        SFP+SR                none

switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ip interface

show ip interface <INTERFACE-ID>

Description

Shows status and configuration information for an IPv4 interface.

Parameter	Description
<INTERFACE-ID>	Specifies the name of an interface. Format: member/slot/port.

Example

```
switch# show ip interface vlan1

Interface vlan1 is up
Admin state is up
Hardware: Ethernet, MAC Address: f8:60:f0:c9:11:60
IP MTU 1500
IPv4 address 10.120.3.8/26
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ip source-interface

`show ip source-interface {sflow | tftp | radius | tacacs | all} [vrf <VRF-NAME>]`

Description

Shows single source IP address configuration settings.

Parameter	Description
sflow tftp radius tacacs all	Shows single source IP address configuration settings for a specific protocol. The <code>all</code> option shows the global setting that applies to all protocols that do not have an address set.

Examples

Showing single source IP address configuration settings for sFlow:

```
switch# show ip source-interface sflow

Source-interface Configuration Information
-----
Protocol      Source Interface
-----
sflow         10.10.10.1
```

Showing single source IP address configuration settings for all protocols:

```
switch# show ip source-interface all

Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP              VRF
-----
all           vlan2              2.2.2.2             default
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show ipv6 interface

show ipv6 interface <INTERFACE-ID>

Description

Shows status and configuration information for an IPv6 interface.

Parameter	Description
<INTERFACE-ID>	Specifies an interface ID. Format: member/slot/port.

Examples

```
switch# show ipv6 interface vlan2

Interface vlan2 is up
Admin state is up
IPv6 address:
  2001::1/64 [VALID]
IPv6 link-local address: fe80::883a:3080:247:c1c0/64 [VALID]
IPv6 Forwarding feature: enabled
IPv6 multicast groups locally joined:
  ff02::1 ff02::1:ff00:1 ff02::1:ff47:c1c0 ff02::1:ff00:0
  ff02::2
IPv6 MTU 1500
IPv6 unicast reverse path forwarding: none
IPv6 load sharing: none
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ipv6 source-interface

show ipv6 source-interface {sflow | tftp | radius | tacacs | all} [vrf <VRF-NAME>]

Description

Shows single source IP address configuration settings.

Parameter	Description
sflow tftp radius tacacs all	Shows single source IP address configuration settings for a specific protocol. The all option shows the global setting that applies to all protocols that do not have an address set.
vrf <VRF-NAME>	Specifies the name of a VRF.

Examples

Showing single source IP address configuration settings for sFlow:

```
switch# show ipv6 source-interface sflow

Source-interface Configuration Information
-----
Protocol      Source Interface
-----
sflow         2001:DB8::1
```

Showing single source IP address configuration settings for all protocols:

```
switch# show ipv6 source-interface all

Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP      VRF
-----
all           vlan2              2001::1     default

switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

shutdown

```
shutdown
no shutdown
```

Description

Disables an interface. Interfaces are disabled by default when created.
The `no` form of this command enables an interface.

Examples

Disabling an interface:

```
switch(config-if)# shutdown
```

Enabling an interface:

```
switch(config-if)# no shutdown
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

The source IP address is determined by the system and is typically the IP address of the outgoing interface in the routing table. However, routing switches may have multiple routing interfaces and outgoing packets can potentially be sent by different paths at different times. This results in different source IP addresses.

AOS-CX provides a configuration model that allows the selection of an IP address to use as the source address for all outgoing traffic. This allows unique identification of the software application on the server site regardless of which local interface has been used to reach the destination server. The source interface selection supports selecting an IP address or interface name.



If the source interface and source IP are configured, Source IP will have priority.

Source-interface selection commands

ip source-interface (protocol <ip-addr>)

```
ip source-interface <PROTOCOL> <IP-ADDR> [vrf <VRF-NAME>]
no ip source-interface <PROTOCOL> <IP-ADDR> [vrf <VRF-NAME>]
```

Description

Configures the source-interface IPv4 address to use for the specified protocol. If a VRF is not given, the default VRF applies. If no interface option is given, the device floods through interfaces and VRFs to reach Aruba Central. Whichever reaches Aruba Central will be picked automatically.

The `no` form of this command removes all configurations.

Parameter	Description
<PROTOCOL>	Specifies the protocol to configure. <code>all</code> Selects all protocols that can be configured by this command. <code>central</code> Selects Aruba Central. <code>dns</code> Selects DNS. <code>ntp</code> Selects NTP. <code>radius</code> Selects radius. <code>sflow</code> Selects sFlow. <code>simplivity</code> Selects simplivity.

Parameter	Description
	syslog Selects syslog. tacacs Selects TACACS. tftp Selects TFTP.
<IP-ADDR>	Specifies the IPv4 address.
vrf <VRF-NAME>	Specifies the VRF name.

Examples

Configuring source-interface IPv4 10.1.1.1 to use for the TFTP protocol:

```
switch(config)# ip source-interface tftp 10.1.1.1
```

Configuring source-interface IPv4 10.1.1.2 to use for the TFTP protocol on VRF green :

```
switch(config)# ip source-interface tftp 10.1.1.2 vrf green
```

Removing source-interface IPv4 10.1.1.1 configuration for the TFTP protocol:

```
switch(config)# no ip source-interface tftp 10.1.1.1
```

Removing source-interface IPv4 10.1.1.2 configuration for TFTP protocol on VRF green:

```
switch(config)# no ip source-interface tftp 10.1.1.2 vrf green
```

Configuring source-interface IPv4 10.1.1.1 to use for the DNS protocol:

```
switch(config)# ip source-interface dns 10.1.1.1
```

Configuring source-interface IPv4 10.1.1.2 to use for the DNS protocol on VRF green :

```
switch(config)# ip source-interface dns 10.1.1.2 vrf green
```

Removing source-interface IPv4 10.1.1.1 configuration for the DNS protocol:

```
switch(config)# no ip source-interface tftp 10.1.1.1
```

Removing source-interface IPv4 10.1.1.2 configuration for the DNS protocol on VRF green:

```
switch(config)# no ip source-interface dns 10.1.1.2 vrf green
```


Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ip source-interface

```
ip source-interface <PROTOCOL> interface <IFNAME> [vrf <VRF-NAME>]  
no ip source-interface <PROTOCOL> interface <IFNAME> [vrf <VRF-NAME>]
```

Description

Configures the IPv4 source-interface interface to use for the specified protocol. If a VRF is not given, the default VRF applies.

The `no` form of this command removes the specified configuration.

Parameter	Description
<PROTOCOL>	Specifies the protocol to configure. <code>all</code> Selects all protocols that can be configured by this command. <code>central</code> Selects Aruba Central. <code>dns</code> Selects DNS. <code>ntp</code> Selects NTP. <code>radius</code> Selects radius. <code>sflow</code> Selects sFlow. <code>syslog</code> Selects syslog. <code>tacacs</code> Selects TACACS. <code>tftp</code> Selects TFTP.
vrf <VRF-NAME>	Specifies the VRF name.
<IFNAME>	Specifies the interface name.

Examples

Configuring IPv4 source-interface interface 1/1/1 to use for the TFTP protocol:

```
switch(config)# ip source-interface tftp interface 1/1/1
```

Configuring IPv4 source-interface interface 1/1/2 to use for the TFTP protocol on VRF green :

```
switch(config)# ip source-interface tftp interface 1/1/2 vrf green
```

Removing IPv4 source-interface 1/1/1 configuration for the TFTP protocol:

```
switch(config)# no ip source-interface tftp interface 1/1/1
```

Removing source-interface interface 1/1/2 configuration for TFTP protocol on VRF green:

```
switch(config)# no ip source-interface tftp interface 1/1/2 vrf green
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ipv6 source-interface

```
ipv6 source-interface <PROTOCOL> <IPv6-ADDR> [vrf <VRF-NAME>]
```

```
no source-interface <PROTOCOL> <IPv6-ADDR> [vrf <VRF-NAME>]
```

Description

Configures the source-interface IPv6 address to use for the specified protocol. If a VRF is not given, the default VRF applies.

The `no` form of this command removes the specified protocol configuration.

Parameter	Description
<PROTOCOL>	Specifies the protocol to configure. ■ all:Selects all protocols supported by this command. ■ central:Selects Aruba Central. ■ ntp:Selects NTP. ■ radius:Selects radius.

Parameter	Description
	■ sflow:Selects sFlow. ■ syslog:Selects syslog. ■ tacacs:Selects TACACS. ■ tftp:Selects TFTP.
<IPv6-ADDR>	Specifies the IPv6 address.
vrf <VRF-NAME>	Specifies the VRF name.

Examples

Configuring source-interface IPv6 1111:2222 to use for the TFTP protocol:

```
switch(config)# ipv6 source-interface tftp 1111:2222
```

Configuring source-interface IPv6 1111:3333 to use for TFTP protocol on VRF green :

```
switch(config)# ipv6 source-interface tftp 1111:3333 vrf green
```

Removing source-interface IPv6 1111:2222 configuration for TFTP protocol:

```
switch(config)# no ipv6 source-interface tftp 1111:2222
```

Removing source-interface IPv6 1111:3333 configuration for TFTP protocol on VRF green:

```
switch(config)# no ipv6 source-interface tftp 1111:3333 vrf green
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ipv6 source-interface

```
ipv6 source-interface <PROTOCOL> interface <IFNAME> [vrf <VRF-NAME>]
no ipv6 source-interface <PROTOCOL> interface <IFNAME> [vrf <VRF-NAME>]
```

Description

Configures the IPv6 source-interface interface to use for the specified protocol. If a VRF is not given, the default VRF applies.

The `no` form of this command removes all configurations.

Parameter	Description
<code><PROTOCOL></code>	Specifies the protocol to configure. <code>all</code> Selects all protocols supported by this command. <code>central</code> Selects Aruba Central. <code>ntp</code> Selects NTP. <code>radius</code> Selects radius. <code>sflow</code> Selects sFlow. <code>syslog</code> Selects syslog. <code>tacacs</code> Selects TACACS. <code>tftp</code> Selects TFTP.
<code><IFNAME></code>	Specifies the interface name.
<code>vrf <VRF-NAME></code>	Specifies the VRF name.

`<IFNAME>`

Specifies the interface name.

`vrf <VRF-NAME>`

Specifies the VRF name.

Examples

Configuring IPv6 source-interface interface 1/1/1 to use for the TFTP protocol :

```
switch(config)# ipv6 source-interface tftp interface 1/1/1
```

Configuring IPv6 source-interface interface 1/1/2 to use for the TFTP protocol on VRF green :

```
switch(config)# ipv6 source-interface tftp interface 1/1/2 vrf green
```

Removing IPv6 source-interface interface 1/1/1 configuration for the TFTP protocol:

```
switch(config)# no ipv6 source-interface tftp interface 1/1/1
```

Removing IPv6 source-interface interface 1/1/2 configuration for the TFTP protocol on VRF green:

```
switch(config)# no ipv6 source-interface tftp interface 1/1/2 vrf green
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show ip source-interface

```
show ip source-interface <PROTOCOL> [vrf <VRF-NAME> | all-vrfs]
```

Description

Displays the source interface information for all VRFs or a specific VRF.

If a VRF is not specified, the default is displayed.

Parameter	Description
<i><PROTOCOL></i>	Specifies the protocol to show. <i>all</i> Shows the source interface configuration for all other protocols. <i>central</i> Shows the source interface configuration for Aruba Central. <i>dns</i> Shows the source interface configuration for DNS. <i>ntp</i> Shows the source interface configuration for NTP. <i>radius</i> Shows the source interface configuration for radius. <i>sflow</i> Shows the source interface configuration for sFlow. <i>syslog</i> Shows the source interface configuration for syslog. <i>tacacs</i> Shows the source interface configuration for TACACS. <i>tftp</i> Shows the source interface configuration for TFTP.
<i>vrf <VRF-NAME></i>	Specifies the VRF name.
<i>all-vrfs</i>	Shows the source interface configuration for all VRFs.

Examples

Displaying all source-interface protocol configurations for VRF red:

```

switch# show ip source-interface all vrf red
Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP      VRF
-----
all           1/1/1              red
switch#

```

Displaying all source-interface protocol configurations for default VRF:

```

switch# show ip source-interface all
Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP      VRF
-----
all           1.1.1.1            default
switch#

```

Displaying all source-interface protocol configurations for all VRFs:

```

switch# show ip source-interface all all-vrfs
Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP      VRF
-----
all           2.2.2.2            all-vrfs
all           1.1.1.1            default
all           1/1/1/1            red
switch#

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show ipv6 source-interface

show ipv6 source-interface <PROTOCOL> [detail] [vrf <VRF-NAME> | all-vrfs]

Description

Displays the IPV6 source interface information configured in the router for all VRFs or a specific VRF.

If a VRF is not specified, the default is displayed.

Parameter	Description
<code><PROTOCOL></code>	Specifies the protocol to show. <code>all</code> Shows the source interface configuration for all other protocols. <code>central</code> Shows the source interface configuration for Aruba Central. <code>ntp</code> Shows the source interface configuration for NTP. <code>radius</code> Shows the source interface configuration for radius. <code>sflow</code> Shows the source interface configuration for sFlow. <code>syslog</code> Shows the source interface configuration for syslog. <code>tacacs</code> Shows the source interface configuration for TACACS. <code>tftp</code> Shows the source interface configuration for TFTP.
<code>vrf <VRF-NAME></code>	Specifies the VRF name.
<code>all-vrfs</code>	Shows the source interface configuration for all VRF.

Examples

Displaying all IPv6 source-interface protocol configurations for default VRF:

```
switch# show ipv6 source-interface all
Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP              VRF
-----
all           1111:2222          default
switch#
```

Displaying all IPv6 source-interface protocol configuration for VRF red:

```
switch# show ipv6 source-interface all vrf red
Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP              VRF
-----
all           1/1/1              red
switch#
```

Displaying all IPv6 source-interface protocol configurations for all VRFs:

```
switch# show ipv6 source-interface all all-vrfs
Source-interface Configuration Information
-----
```

Protocol	Src-Interface	Src-IP	VRF
all		2.2.2.2:3.3.3.3	all-vrfs
all		1.1.1.1:2.2.2.2	default
all	1/1/1	2::2	red
switch#			

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show running-config

show running-config

Description

Displays the current running configuration.

Examples

Displaying the running configuration (only items of interest to source interface selection are shown in this example output command):



Aruba Central is the priority agent. If no command is specified for ip source-interface, Central will choose the command automatically if it is reachable on any of the known ports.

```
switch# show running-config
vrf green
ip source-interface tftp interface 1/1/2 vrf green
ip source-interface radius interface 1/1/2 vrf green
ip source-interface ntp interface 1/1/2 vrf green
ip source-interface tacacs interface 1/1/2 vrf green
ip source-interface dns interface 1/1/2 vrf green
ip source-interface central interface 1/1/2 vrf green
ip source-interface all interface 1/1/2 vrf green
ipv6 source-interface tftp 2222::3333 vrf green
ipv6 source-interface radius 2222::3333 vrf green
ipv6 source-interface ntp 2222::3333 vrf green
ipv6 source-interface tacacs 2222::3333 vrf green
ipv6 source-interface central 2222::3333 vrf green
ipv6 source-interface all 2222::3333 vrf green
ip source-interface tftp 10.20.3.1
ip source-interface radius 10.20.3.1
ip source-interface ntp 10.20.3.1
ip source-interface tacacs 10.20.3.1
```



```

ip source-interface dns 10.20.3.1
ip source-interface central 10.20.3.1
ip source-interface all 10.20.3.1
interface 1/1/1
    no shutdown
    ip address 10.20.3.1/24
interface 1/1/2
    vrf attach green
    ip address 20.1.1.1/24
    ipv6 address 2222::3333/64
interface 1/1/45
    no shutdown
    ip address 100.1.0.1/24
    ipv6 address 1111::2222/64
ip route 100.2.0.0/24 10.20.3.2
switch#

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

VLANs are primarily used to provide network segmentation at layer 2. VLANs enable the grouping of users by logical function instead of physical location. They make managing bandwidth usage within networks possible by:

- Allowing grouping of high-bandwidth users on low-traffic segments
- Organizing users from different LAN segments according to their need for common resources and individual protocols
- Improving traffic control at the edge of networks by separating traffic of different protocol types.
- Enhancing network security by creating subnets to control in-band access to specific network resources

VLANs are generally assigned on an organizational basis rather than on a physical basis. For example, a network administrator could assign all workstations and servers used by a particular workgroup to the same VLAN, regardless of their physical locations.

Hosts in the same VLAN can directly communicate with one another. A router or a Layer 3 switch is required for hosts in different VLANs to communicate with one another.

VLANs help reduce bandwidth waste, improve LAN security, and enable network administrators to address issues such as scalability and network management.



Refer to the Layer 2 Bridging Guide for VLAN configuration and commands.

Checkpoints

A checkpoint is a snapshot of the running configuration of a switch and its relevant metadata during the time of creation. Checkpoints can be used to apply the switch configuration stored within a checkpoint whenever needed, such as to revert to a previous, clean configuration. Checkpoints can be applied to other switches of the same platform. A switch is able to store multiple checkpoints.

Checkpoint types

The switch supports two types of checkpoints:

- **System generated checkpoints:** The switch automatically generates a system checkpoint whenever a configuration change occurs.
- **User generated checkpoints:** The administrator can manually generate a checkpoint whenever required.

Maximum number of checkpoints

- Maximum checkpoints: 64 (including the startup configuration)
- Maximum user checkpoints: 32
- Maximum system checkpoints: 32

User generated checkpoints

User checkpoints can be created at any time, as long as one configuration difference exists since the last checkpoint was created. Checkpoints can be applied to either the running or startup configurations on the switch.

All user generated checkpoints include a time stamp to identify when a checkpoint was created.

A maximum of 32 user generated checkpoints can be created.

System generated checkpoints

System generated checkpoints are automatically created by default. Whenever a configuration change occurs, the switch starts a timeout counter (300 seconds by default). For each additional configuration change, the timeout counter is restarted. If the timeout expires with no additional configuration changes being made, the switch generates a new checkpoint.

System generated checkpoints are named with the prefix `cpc` followed by a time stamp in the format `<YYYYMMDDHHMMSS>`. For example: `cpc20170630073127`.

System checkpoints can be applied using the checkpoint rollback feature or copy command.

A maximum of 32 system checkpoints can be created. Beyond this limit, the newest system checkpoint replaces the oldest system checkpoint.

Supported remote file formats

You can restore a switch configuration by copying a switch configuration stored on a USB drive or a remote network device through SFTP/TFTP. The remote file formats that the switch supports depends on where you plan to restore the checkpoint.

Restoring a checkpoint to a...	File type supported
Running configuration	■ CLI ■ JSON ■ Checkpoint
Startup configuration	■ JSON ■ Checkpoint
Specified checkpoint	Specified checkpoint

Rollback

The term rollback is used to refer to when a switch configuration is reverted to a pre-existing checkpoint.

For example, the following command applies the configuration from checkpoint `ckpt1`. All previous configurations are lost after the execution of this command: `checkpoint rollback ckpt1`

You can also specify the rollback of the running configuration or of the startup configuration with a specified checkpoint, as shown with the following command: `copy checkpoint <checkpoint-name> {running-config | startup-config}`

Checkpoint auto mode

Checkpoint auto mode configures the switch with failover support, causing it to automatically revert to a previous configuration if it becomes inoperable or inaccessible due to configuration changes that are being made.

After entering checkpoint auto mode, you have a set amount of time to add, remove, or modify the existing switch configuration. To save your changes, you must execute the `checkpoint auto confirm` command before the auto mode timer expires. If you do not execute the `checkpoint auto confirm` command within the specified time, all configuration changes you made are discarded and the running configuration reverts to the state it was before entering checkpoint auto mode.

Testing a switch configuration in checkpoint auto mode

Process overview:

1. Enable the checkpoint auto mode.
2. To save the configuration, enter the `checkpoint auto confirm` command before the specified time set in step 1.

Checkpoint commands

checkpoint auto

```
checkpoint auto <TIME-LAPSE-INTERVAL>
```

Description

Starts auto checkpoint mode. In auto checkpoint mode, the switch temporarily saves the runtime configuration as a checkpoint only for the specified time lapse interval. Configuration changes must be

saved before the interval expires, otherwise the runtime configuration is restored from the temporary checkpoint.

Parameter	Description
<code><TIME-LAPSE-INTERVAL></code>	Specifies the time lapse interval in minutes. Range: 1 to 60.

Usage

To save the runtime checkpoint permanently, run the `checkpoint auto confirm` command during the time lapse interval. The filename for the saved checkpoint is named `AUTO<YYYYMMDDHHMMSS>`. If the `checkpoint auto confirm` command is not entered during the specified time lapse interval, the previous runtime configuration is restored.

Examples

Confirming the auto checkpoint:

```
switch# checkpoint auto 20
Auto checkpoint mode expires in 20 minute(s)
switch# WARNING Please "checkpoint auto confirm" within 2 minutes
switch# checkpoint auto confirm
checkpoint AUTO20170801011154 created
```

In this example, the runtime checkpoint was saved because the `checkpoint auto confirm` command was entered within the value set by the `time-lapse-interval` parameter, which was 20 minutes.

Not confirming the auto checkpoint:

```
switch# checkpoint auto 20
Auto checkpoint mode expires in 20 minute(s)
switch# WARNING Please "checkpoint auto confirm" within 2 minutes
WARNING: Restoring configuration. Do NOT add any new configuration.
Restoration successful
```

In this example, the runtime checkpoint was reverted because the `checkpoint auto confirm` command was not entered within the value set by the `time-lapse-interval` parameter, which was 20 minutes.

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint auto confirm

checkpoint auto confirm

Description

Signals to the switch to save the running configuration used during the auto checkpoint mode. This command also ends the auto checkpoint mode.

Usage

To save the runtime checkpoint permanently, run the `checkpoint auto confirm` command during the time lapse value set by the `checkpoint auto <TIME-LAPSE-INTERVAL>` command. The generated checkpoint name will be in the format `AUTO<YYYYMMDDHHMMSS>`. If the `checkpoint auto confirm` command is not entered during the specified time lapse interval, the previous runtime configuration is restored.

Examples

Confirming the auto checkpoint:

```
switch# checkpoint auto confirm
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint diff

```
checkpoint diff {<CHECKPOINT-NAME1> | running-config | startup-config}  
               {<CHECKPOINT-NAME2> | running-config | startup-config}
```

Description

Shows the difference in configuration between two configurations. Compare checkpoints, the running configuration, or the startup configuration.

Parameter	Description
{<CHECKPOINT-NAME1> running-config startup-config}	Selects either a checkpoint, the running configuration, or the startup configuration as the baseline.
{<CHECKPOINT-NAME2> running-config startup-config}	Selects either a checkpoint, the running configuration, or the startup configuration to compare.

Usability

The output of the `checkpoint diff` command has several symbols:

- The plus sign (+) at the beginning of a line indicates that the line exists in the comparison but not in the baseline.
- The minus sign (-) at the beginning of a line indicates that the line exists in the baseline but not in the comparison.

Examples

In the following example, the configurations of checkpoints `cp1` and `cp2` are displayed before the `checkpoint diff` command, so that you can see the context of the `checkpoint diff` command.

```
switch# checkpoint diff chkpt01 chkpt02
--- /tmp/chkpt011607564301327
+++ /tmp/chkpt021607564301353
@@ -1,7 +1,7 @@
!
!Version AOS-CX PL.10.06.0100V
!export-password: default
-hostname Switch
+hostname Switch1
 user admin group administrators password ciphertext
AQBapTyg9tpaiAaTfSVV5eNdFzOORRvZ6CMpglh1P+LQUHQLYgAAAGAhmRqFbkNvrgy2SBVk7H8C5hvg/Iib
8rWYFZLEaSCrobNP9EwMu+hLNM0xmsh45yG8dncP7WkxjwrW4p4Qra6dVfr0EW8xh/lpQf8F/2Wki20Lc9JL
XiYge7ti0H6cVn+G
 radius-server tracking interval 60
 no usb

switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint post-configuration

`checkpoint post-configuration`

`no checkpoint post-configuration`

Description

Enables creation of system generated checkpoints when configuration changes occur. This feature is enabled by default.

The `no` form of this command disables system generated checkpoints.

Usage

System generated checkpoints are automatically created by default. Whenever a configuration change occurs, the switch starts a timeout counter (300 seconds by default). For each additional configuration

change, the timeout counter is restarted. If the timeout expires with no additional configuration changes being made, the switch generates a new checkpoint.

System generated checkpoints are named with the prefix `CPC` followed by a time stamp in the format `<YYYYMMDDHHMMSS>`. For example: `CPC20170630073127`.

System checkpoints can be applied using the checkpoint rollback feature or copy command.

A maximum of 32 system checkpoints can be created. Beyond this limit, the newest system checkpoint replaces the oldest system checkpoint.

Examples

Enabling system checkpoints:

```
switch(config)# checkpoint post-configuration
```

Disabling system checkpoints:

```
switch(config)# no checkpoint post-configuration
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint post-configuration timeout

```
checkpoint post-configuration timeout <TIMEOUT>
```

```
no checkpoint post-configuration timeout <TIMEOUT>
```

Description

Sets the timeout for the creation of system checkpoints. The timeout specifies the amount of time since the latest configuration for the switch to create a system checkpoint.

The `no` form of this command resets the timeout to 300 seconds, regardless of the value of the *<TIMEOUT>* parameter.

Parameter	Description
<code>timeout <i><TIMEOUT></i></code>	Specifies the timeout in seconds. Range: 5 to 600. Default: 300.

Examples

Setting the timeout for system checkpoints to 60 seconds:


```
switch(config)# checkpoint post-configuration timeout 60
```

Resetting the timeout for system checkpoints to 300 seconds:

```
switch(config)# no checkpoint post-configuration timeout 1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint rename

```
checkpoint rename <OLD-CHECKPOINT-NAME> <NEW-CHECKPOINT-NAME>
```

Description

Renames an existing checkpoint.

Parameter	Description
<OLD-CHECKPOINT-NAME>	Specifies the name of an existing checkpoint to be renamed.
<NEW-CHECKPOINT-NAME>	Specifies the new name for the checkpoint. The checkpoint name can be alphanumeric. It can also contain underscores (_) and dashes (-). NOTE: Do not start the checkpoint name with <code>CPC</code> because it is used for system-generated checkpoints.

Examples

Renaming checkpoint **ckpt1** to **cfg001**:

```
switch# checkpoint rename ckpt1 cfg001
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

checkpoint rollback

```
checkpoint rollback {<CHECKPOINT-NAME> | startup-config}
```

Description

Applies the configuration from a pre-existing checkpoint or the startup configuration to the running configuration.

Parameter	Description
<CHECKPOINT-NAME>	Specifies a checkpoint name.
startup-config	Specifies the startup configuration.

Examples

Applying a checkpoint named `ckpt1` to the running configuration:

```
switch# checkpoint rollback ckpt1
Success
```

Applying a startup checkpoint to the running configuration:

```
switch# checkpoint rollback startup-config
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy checkpoint <CHECKPOINT-NAME> <REMOTE-URL>

```
copy checkpoint <CHECKPOINT-NAME> <REMOTE-URL> [vrf <VRF-NAME>]
```

Description

Copies a checkpoint configuration to a remote location as a file. The configuration is exported in checkpoint format, which includes switch configuration and relevant metadata.

Parameter	Description
<CHECKPOINT-NAME>	Specifies the name of a checkpoint.
<REMOTE-URL>	Specifies the remote destination and filename using the syntax: {tftp sftp}://<IP-ADDRESS>[:<PORT-NUMBER>] [;blocksize=<BLOCKSIZE-VALUE>] / <FILE-NAME>
vrf <VRF-NAME>	Specifies a VRF name.

Examples

Copying checkpoint configuration to remote file through TFTP:

```
switch# copy checkpoint ckpt1 tftp://192.168.1.10/ckptmeta vrf default
##### 100.0%
Success
```

Copying checkpoint configuration to remote file through SFTP:

```
switch# copy checkpoint ckpt1 sftp://root@192.168.1.10/ckptmeta vrf default
The authenticity of host '192.168.1.10 (192.168.1.10)' can't be established.
ECDSA key fingerprint is SHA256:FtOm6Uxuxumil7VCwLnhz92H9LkjY+eURbdddOETy50.
Are you sure you want to continue connecting (yes/no)? yes
root@192.168.1.10's password:
sftp> put /tmp/ckptmeta ckptmeta
Uploading /tmp/ckptmeta to /root/ckptmeta
Warning: Permanently added '192.168.1.10' (ECDSA) to the list of known hosts.
Connected to 192.168.1.10.
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy checkpoint <CHECKPOINT-NAME> {running-config | startup-config}

copy checkpoint <CHECKPOINT-NAME> {running-config | startup-config}

Description

Copies an existing checkpoint configuration to the running configuration or to the startup configuration.

Parameter	Description
<CHECKPOINT-NAME>	Specifies the name of an existing checkpoint.
{running-config startup-config}	Selects whether the running configuration or the startup configuration receives the copied checkpoint configuration. If the startup configuration is already present, the command overwrites the startup configuration.

Examples

Copying **ckpt1** checkpoint to the running configuration:

```
switch# copy checkpoint ckpt1 running-config
Success
```

Copying **ckpt1** checkpoint to the startup configuration:

```
switch# copy checkpoint ckpt1 startup-config
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy checkpoint <CHECKPOINT-NAME> <STORAGE-URL>

copy checkpoint <CHECKPOINT-NAME> <STORAGE-URL>

Description

Copies an existing checkpoint configuration to a USB drive. The file format is defined when the checkpoint was created.

Parameter	Description
<CHECKPOINT-NAME>	Specifies the name of the checkpoint to copy. The checkpoint name can be alphanumeric. It can also contain underscores (_) and dashes (-).
<STORAGE-URL>>	Specifies the name of the target file on the USB drive using the following syntax: <code>usb:/<FILE></code> The USB drive must be formatted with the FAT file system.

Examples

Copying the test checkpoint to the testCheck file on the USB drive:

```
switch# copy checkpoint test usb:/testCheck
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy <REMOTE-URL> checkpoint <CHECKPOINT-NAME>

copy <REMOTE-URL> checkpoint <CHECKPOINT-NAME> [vrf <VRF-NAME>]

Description

Copies a remote configuration file to a checkpoint. The remote configuration file must be in checkpoint format.

Parameter	Description
<REMOTE-URL>	Specifies a remote file using the following syntax: {tftp sftp}://<IP-ADDRESS>[:<PORT-NUMBER>][;blocksize=<BLOCKSIZE-VALUE>]/<FILE-NAME>>
<CHECKPOINT-NAME>	Specifies the name of the target checkpoint. The checkpoint name can be alphanumeric. It can also contain underscores (_) and dashes (-). Required. NOTE: Do not start the checkpoint name with CPC because it is used for system-generated checkpoints.
vrf <VRF-NAME>	Specifies a VRF name. Default: default.

Examples

Copying a checkpoint format file to checkpoint **ckpt5** on the default VRF:

```
switch# copy tftp://192.168.1.10/ckptmeta checkpoint ckpt5
##### 100.0%
100.0%
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy <REMOTE-URL> {running-config | startup-config}

copy <REMOTE-URL> {running-config | startup-config } [vrf <VRF-NAME>]

Description

Copies a remote file containing a switch configuration to the running configuration or to the startup configuration.

Parameter	Description
<REMOTE-URL>	Specifies a remote file with the following syntax: {tftp sftp}://<IP-ADDRESS>[:<PORT-NUMBER>][;blocksize=<BLOCKSIZE-VALUE>]/<FILE-NAME>
{running-config startup-config}	Selects whether the running configuration or the startup configuration receives the copied checkpoint configuration. If the startup configuration is already present, the command overwrites the startup configuration.
vrf <VRF-NAME>	Specifies the name of a VRF. Default: default.

Usage

The switch copies only certain file types. The format of the file is automatically detected from contents of the file. The `startup-config` option only supports the JSON file format and checkpoints, but the `running-config` option supports the JSON and CLI file formats and checkpoints.

When a file of the CLI format is copied, it overwrites the running configuration. The CLI command does not clear the running configuration before applying the CLI commands. All of the CLI commands in the file are applied line-by-line. If a particular CLI command fails, the switch logs the failure and it continues to the next line in the CLI configuration. The event log (`show events -d hpe-config`) provides information as to which command failed.

Examples

Copying a JSON format file to the running configuration:

```
switch# copy tftp://192.168.1.10/runjson running-config
##### 100.0%
Configuration may take several minutes to complete according to configuration file
size
--0%----10%----20%----30%----40%----50%----60%----70%----80%----90%----100%--
Success
```

Copying a CLI format file to the running configuration with an error in the file:

```
switch# copy tftp://192.168.1.10/runcli running-config
##### 100.0%
Configuration may take several minutes to complete according to configuration file
size
--0%---10%---20%---30%---40%---50%---60%---70%---80%---90%---100%--
Some of the configuration lines from the file were NOT applied. Use 'show
events -d hpe-config' for more info.
```

Copying a CLI format file to the startup configuration:

```
switch# copy tftp://192.168.1.10/startjson startup-config
##### 100.0%
100.0%
Success
```

Copying an unsupported file format to the startup configuration:

```
switch# copy tftp://192.168.1.10/startfile startup-config
##### 100.0%
100.0%
unsupported file format
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy running-config {startup-config | checkpoint <CHECKPOINT-NAME>}

copy running-config {startup-config | checkpoint <CHECKPOINT-NAME>}

Description

Copies the running configuration to the startup configuration or to a new checkpoint. If the startup configuration is already present, the command overwrites the existing startup configuration.

Parameter	Description
startup-config	Specifies that the startup configuration receives a copy of the running configuration.

Parameter	Description
checkpoint <CHECKPOINT-NAME>	Specifies the name of a new checkpoint to receive a copy of the running configuration. The checkpoint name can be alphanumeric. It can also contain underscores (_) and dashes (-). NOTE: Do not start the checkpoint name with CPC because it is used for system-generated checkpoints.

Examples

Copying the running configuration to the startup configuration:

```
switch# copy running-config startup-config
Success
```

Copying the running configuration to a new checkpoint named **ckpt1**:

```
switch# copy running-config checkpoint ckpt1
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy {running-config | startup-config} <REMOTE-URL>

copy {running-config | startup-config} <REMOTE-URL> {cli | json} [vrf <VRF-NAME>]

Description

Copies the running configuration or the startup configuration to a remote file in either CLI or JSON format.

Parameter	Description
{running-config startup-config}	Selects whether the running configuration or the startup configuration is copied to a remote file.
<REMOTE-URL>	Specifies the remote file using the syntax: {tftp sftp}://<IP-ADDRESS>[:<PORT-NUMBER>][;blocksize=<BLOCKSIZE-VALUE>]/<FILE-NAME>

Parameter	Description
{cli json}	Selects the remote file format: P: CLI or JSON.
vrf <VRF-NAME>	Specifies the name of a VRF. Default: default.

Examples

Copying a running configuration to a remote file in CLI format:

```
switch# copy running-config tftp://192.168.1.10/runcli cli
##### 100.0%
Success
```

Copying a running configuration to a remote file in JSON format:

```
switch# copy running-config tftp://192.168.1.10/runjson json
##### 100.0%
Success
```

Copying a startup configuration to a remote file in CLI format:

```
switch# copy startup-config sftp://root@192.168.1.10/startcli cli
root@192.168.1.10's password:
sftp> put /tmp/startcli startcli
Uploading /tmp/startcli to /root/startcli
Connected to 192.168.1.10.
Success
```

Copying a startup configuration to a remote file in JSON format:

```
switch# copy startup-config sftp://root@192.168.1.10/startjson json
root@192.168.1.10's password:
sftp> put /tmp/startjson startjson
Uploading /tmp/startjson to /root/startjson
Connected to 192.168.1.10.
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy {running-config | startup-config} <STORAGE-URL>

```
copy {running-config | startup-config} <STORAGE-URL> {cli | json}
```

Description

Copies the running configuration or a startup configuration to a USB drive.

Parameter	Description
{running-config startup-config}	Selects the running configuration or the startup configuration to be copied to the switch USB drive.
<STORAGE-URL>	Specifies a remote file with the following syntax: <code>usb:/<file></code>
{cli json}	Selects the format of the remote file: CLI or JSON.

Usage

The switch supports JSON and CLI file formats when copying the running or starting configuration to the USB drive. The USB drive must be formatted with the FAT file system.

The USB drive must be enabled and mounted with the following commands:

```
switch(config)# usb
switch(config)# end
switch# usb mount
```

Examples

Copying a running configuration to a file named `runCLI` on the USB drive:

```
switch# copy running-config usb:/runCLI cli
Success
```

Copying a startup configuration to a file named `startCLI` on the USB drive:

```
switch# copy startup-config usb:/startCLI cli
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy startup-config running-config

```
copy startup-config running-config
```

Description

Copies the startup configuration to the running configuration.

Examples

```
switch# copy startup-config running-config
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy <STORAGE-URL> running-config

copy <STORAGE-URL> {running-config | startup-config | checkpoint <CHECKPOINT-NAME>}

Description

This command copies a specified configuration from the USB drive to the running configuration, to a startup configuration, or to a checkpoint.

Parameter	Description
<STORAGE-URL>	Specifies the name of a configuration file on the USB drive with the syntax: usb: / <FILE>
running-config	Specifies that the configuration file is copied to the running configuration. The file must be in CLI, JSON, or checkpoint format or the copy will fail. the copy will not work.
startup-config	Specifies that the configuration file is copied to the startup configuration. The switch stores this configuration between reboots. The startup configuration is used as the operating configuration following a reboot of the switch. The file must be in JSON or checkpoint format or the copy will fail.
checkpoint <CHECKPOINT-NAME>	Specifies the name of a new checkpoint file to receive a copy of the configuration. The configuration file on the USB drive must be in checkpoint format. NOTE: Do not start the checkpoint name with CPC because it is used for system-generated checkpoints.

Usage

This command requires that the USB drive is formatted with the FAT file system and that the file be in the appropriate format as follows:

- **running-config**: This option requires the file on the USB drive be in CLI, JSON, or checkpoint format.
- **startup-config**: This option requires the file on the USB drive be in JSON or checkpoint format.
- **checkpoint <checkpoint-name>**: This option requires the file on the USB drive be in checkpoint format.

Examples

Copying the file **runCli** from the USB drive to the running configuration:

```
switch# copy usb:/runCli running-config
Configuration may take several minutes to complete according to configuration
file size
--0%-----10%-----20%-----30%-----40%-----50%-----60%-----70%-----80%-----90%-----100%--
Success
```

Copying the file **startUp** from the USB drive to the startup configuration:

```
switch# copy usb:/startUp startup-config
Success
```

Copying the file **testCheck** from the USB drive to the **abc** checkpoint:

```
switch# copy usb:/testCheck checkpoint abc
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

erase

```
erase
  checkpoint <checkpoint-name>
  core-dump all|daemon|dsm|kernel
  startup-config
  all
```

Description

Deletes an existing checkpoint, startup configuration, or core-dump.

Parameter	Description
<code>checkpoint <CHECKPOINT-NAME></code>	Specifies the name of a checkpoint.
<code>core-dump</code> <code>all daemon <daemon-name></code> <code> kernel vsf</code>	Erase one of the following sets of core-dump files: ■ <code>all</code>: Erase all core-dump files. ■ <code>daemon <daemon-name></code>: Erase daemon core-dump files. ■ <code>kernel</code>: Erase the kernel core-dump. ■
<code>startup-config</code>	Specifies the startup configuration.
<code>all</code>	Specifies all checkpoints.

Examples

Erasing checkpoint **ckpt1**:

```
switch# erase checkpoint ckpt1
```

Erasing the startup configuration:

```
switch# erase startup-config
```

Erasing all checkpoints:

```
switch# erase checkpoint all
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show checkpoint <CHECKPOINT-NAME>

```
show checkpoint <CHECKPOINT-NAME> [json]
```

Description

Shows the configuration of a checkpoint.

Parameter	Description
<CHECKPOINT-NAME>	Specifies the name of a checkpoint.
[json]	Specifies that the output is displayed in JSON format.

Examples

Showing the configuration of the `ckpt1` checkpoint in CLI format:

```
switch# show checkpoint ckpt1
Checkpoint configuration:
!
!Version AOS-CX PL.10.07.0000K-75-g55e5193
!export-password: default
lacp system-priority 65535
user admin group administrators password ciphertext
AQBapQjwipebv36io0jFfde7ZzrHckncal1D+3n8XFTZKQdmYgAAADetYOeHSme93xzdD0uz6Vr9Kl+XBzB+
2GB0UBxSF7rvgn2x8KSgkqv7iqXVQ0Te6LkSMnH4BdNat3Bf25qyvOqmr4YakO1V3rg8zAOADkPktQD8joTH
XflzwomoIzcmv/uX
cli-session
    timeout 0
!
!
!
!
ssh server vrf default
vlan 1
spanning-tree
interface lag 1
    no shutdown
    vlan access 1
interface lag 128
    no shutdown
    vlan access 1
interface lag 129
    shutdown
    vlan access 1
    lacp mode active
interface 1/1/1
    no shutdown
    lag 128
    lacp port-id 65535
interface 1/1/2
    no shutdown
    vlan access 1
interface 1/1/3
    no shutdown
    vlan access 1
interface 1/1/4
    no shutdown
    vlan access 1
interface 1/1/5
    no shutdown
    vlan access 1
interface 1/1/6
    no shutdown
    vlan access 1
interface 1/1/7
    no shutdown
    vlan access 1
```

```

interface 1/1/8
  no shutdown
  vlan access 1
interface 1/1/9
  no shutdown
  vlan access 1
interface 1/1/10
  no shutdown
  vlan access 1
interface 1/1/11
  no shutdown
  vlan access 1
interface 1/1/12
  no shutdown
  vlan access 1
interface 1/1/13
  no shutdown
  vlan access 1
interface 1/1/14
  no shutdown
  vlan access 1
interface 1/1/15
  no shutdown
  vlan access 1
interface 1/1/16
  no shutdown
  vlan access 1
interface vlan 1
  ip dhcp
snmp-server vrf default
!
!
!
!
!
https-server vrf default

```

Showing the configuration of the `ckpt1` checkpoint in JSON format:

```

switch# show checkpoint ckpt1 json
Checkpoint configuration:
{
  "AAA_Server_Group": {
    "local": {
      "group_name": "local"
    },
    "none": {
      "group_name": "none"
    }
  },
  ...
  ...
  ...
  ...

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show checkpoint <CHECKPOINT-NAME> hash

show checkpoint <CHECKPOINT-NAME> hash [cli | json]

Description

Shows a configuration checkpoint hash calculated with the SHA-256 algorithm. When the output format is not specified, the CLI format is used. This enables you to determine whether there has been a configuration change since a previous hash was calculated.

Parameter	Description
<CHECKPOINT-NAME>	Specifies an existing checkpoint name.
[cli json]	Selects either the CLI or JSON format.

Examples

Showing a checkpoint SHA-256 hash in JSON format:

```
switch# show checkpoint ckpt1 hash json
Calculating the hash: [Success]

The SHA-256 hash of the checkpoint in JSON format, created in image XX.10.08.xxxx:

cc7a57a9bbb4e6600d3b4180296a35f6af9e797ce9c439955dfe5de58b06da9e

This hash is only valid for comparison to a baseline hash if the configuration has
not been explicitly changed (such as with a CLI command, REST operation, etc.)
or implicitly changed (such as by changing a hardware module, upgrading the
SW version, etc.).
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show checkpoint post-configuration

show checkpoint post-configuration

Description

Shows the configuration settings for creating system checkpoints.

Examples

```
switch# show checkpoint post-configuration

Checkpoint Post-Configuration feature
-----

Status           : enabled
Timeout (sec)    : 300
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show checkpoint

show checkpoint

Description

Shows a detailed list of all saved checkpoints.

Examples

Showing a detailed list of all saved checkpoints:

```
switch# show checkpoint

NAME      TYPE      WRITER  DATE (YYYY/MM/DD)  IMAGE VERSION
ckpt1     checkpoint User    2017-02-23T00:10:02Z XX.01.01.000X
ckpt2     checkpoint User    2017-03-08T18:10:01Z XX.01.01.000X
ckpt3     checkpoint User    2017-03-09T23:11:02Z XX.01.01.000X
ckpt4     checkpoint User    2017-03-11T00:00:03Z XX.01.01.000X
ckpt5     latest    User    2017-03-14T01:12:27Z XX.01.01.000X
```

Command History

Release	Modification
10.08	Command syntax show checkpoint list all is replaced with show checkpoint.
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show checkpoint date

show checkpoint date <START-DATE> <END-DATE>

Description

Shows detailed list of all saved checkpoints created within the specified date range.

Parameter	Description
<START-DATE>	Specifies the starting date for the range of saved checkpoints to show. Format: YYYY-MM-DD.
<END-DATE>	Specifies the ending date for the range of saved checkpoints to show. Format: YYYY-MM-DD.

Examples

Showing a detailed list of saved checkpoints for a specific date range:

```
switch# show checkpoint date 2017-03-08 2017-03-12
```

NAME	TYPE	WRITER	DATE (YYYY/MM/DD)	IMAGE	VERSION
ckpt2	checkpoint	User	2017-03-08T18:10:01Z	XX.01.01.000X	
ckpt3	checkpoint	User	2017-03-09T23:11:02Z	XX.01.01.000X	
ckpt4	checkpoint	User	2017-03-11T00:00:03Z	XX.01.01.000X	

Command History

Release	Modification
10.08	Command syntax show checkpoint list date <START-DATE> <END-DATE> is replaced with show checkpoint date <START-DATE> <END-DATE>
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show running-config hash

show running-config hash [cli | json]

Description

Shows the running-config checkpoint hash, calculated with the SHA-256 algorithm. When the output format is not specified, the CLI format is used. This enables you to determine whether there has been a configuration change since a previous hash was calculated.

Parameter	Description
[cli json]	Selects either the CLI or JSON format.

Examples

Showing the running-config checkpoint SHA-256 hash in CLI format:

```
switch# show running-config hash cli
Calculating the hash: [Success]

SHA-256 hash of the config in CLI format:

8db4e7e10f4b7f1a6ab17ad2b4efe0e72f1849103eaf43da62aa1d715075b89e

This hash is only valid for comparison to a baseline hash if the configuration has
not been explicitly changed (such as with a CLI command, REST operation, etc.)
or implicitly changed (such as by changing a hardware module, upgrading the
SW version, etc.).
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show startup-config hash

show startup-config hash [cli | json]

Description

Shows the startup-config checkpoint hash, calculated with the SHA-256 algorithm. When the output format is not specified, the CLI format is used. This enables you to determine whether there has been a configuration change since a previous hash was calculated.

Parameter	Description
[cli json]	Selects either the CLI or JSON format.

Examples

Showing the startup-config checkpoint SHA-256 hash in CLI format:

```
switch# show startup-config hash cli
Calculating the hash: [Success]

SHA-256 hash of the config in CLI format:

8db4e7e10f4b7f1a6ab17ad2b4efe0e72f1849103eaf43da62aa1d715075b89e

This hash is only valid for comparison to a baseline hash if the configuration has
not been explicitly changed (such as with a CLI command, REST operation, etc.)
or implicitly changed (such as by changing a hardware module, upgrading the
SW version, etc.).
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

write memory

write memory

Description

Saves the running configuration to the startup configuration. It is an alias of the command `copy running-config startup-config`. If the startup configuration is already present, this command overwrites the startup configuration.

Examples

```
switch# write memory
Success
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

Boot commands

boot set-default

`boot set-default {primary | secondary}`

Description

Sets the default operating system image to use when the system is booted.

Parameter	Description
primary	Selects the primary network operating system image.
secondary	Selects the secondary network operating system image.

Example

Selecting the primary image as the default boot image:

```
switch# boot set-default primary
Default boot image set to primary.
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

boot system

`boot system [primary | secondary | serviceos]`

Description

Reboots all modules on the switch. By default, the configured default operating system image is used. Optional parameters enable you to specify which system image to use for the reboot operation and for future reboot operations.

Parameter	Description
primary	Selects the primary operating system image for this reboot and sets the configured default operating system image to <code>primary</code> for future reboots.

Parameter	Description
<code>secondary</code>	Selects the secondary operating system image for this reboot and sets the configured default operating system image to <code>secondary</code> for future reboots.
<code>serviceos</code>	Selects the service operating system for this reboot. Does not change the configured default operating system image. The service operating system acts as a standalone bootloader and recovery OS for switches running the AOS-CX operating system and is used in rare cases when troubleshooting a switch.

Usage

This command reboots the entire system. If you do not select one of the optional parameters, the system reboots from the configured default boot image.

You can use the `show images` command to show information about the primary and secondary system images.

Choosing one of the optional parameters affects the setting for the default boot image:

- If you select the `primary` or `secondary` optional parameter, that image becomes the configured default boot image for future system reboots. The command fails if the switch is not able to set the operating system image to the image you selected.
You can use the `boot set-default` command to change the configured default operating system image.
- If you select `serviceos` as the optional parameter, the configured default boot image remains the same, and the system reboots all management modules with the service operating system.

If the configuration of the switch has changed since the last reboot, when you execute the `boot system` command you are prompted to save the configuration and you are prompted to confirm the reboot operation.

Saving the configuration is not required. However, if you attempt to save the configuration and there is an error during the save operation, the `boot system` command is aborted.

Examples

Rebooting the system from the configured default operating system image:

```
switch# boot system
Do you want to save the current configuration (y/n)? y
The running configuration was saved to the startup configuration.

This will reboot the entire switch and render it unavailable
until the process is complete.
Continue (y/n)? y
The system is going down for reboot.
```

Rebooting the system from the secondary operating system image, setting the secondary operating system image as the configured default boot image:

```
switch# boot system secondary
Default boot image set to secondary.

Do you want to save the current configuration (y/n)? n
```

```
This will reboot the entire switch and render it unavailable
until the process is complete.
Continue (y/n)? y
The system is going down for reboot.
```

Canceling a system reboot:

```
switch# boot system

Do you want to save the current configuration (y/n)? n

This will reboot the entire switch and render it unavailable
until the process is complete.
Continue (y/n)? n
Reboot aborted.
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show boot-history

```
show boot-history [all]
```

Description

Shows boot information. When no parameters are specified, shows the most recent information about the boot operation, and the three previous boot operations for the active management module. When the `all` parameter is specified, shows the boot information for the active management module.

Parameter	Description
<code>all</code>	Shows boot information for the active management module and all available line modules.

Usage

This command displays the boot-index, boot-ID, and up time in seconds for the current boot. If there is a previous boot, it displays boot-index, boot-ID, reboot time (based on the time zone configured in the system) and reboot reasons. Previous boot information is displayed in reverse chronological order.

Index

The position of the boot in the history file. Range: 0 to3.

Boot ID

A unique ID for the boot . A system-generated 128-bit string.

Current Boot, up for <SECONDS> seconds

For the current boot, the `show boot-history` command shows the number of seconds the module has been running on the current software.

Timestamp boot reason

For previous boot operations, the `show boot-history` command shows the time at which the operation occurred and the reason for the boot. The reason for the boot is one of the following values:

<DAEMON-NAME> crash

The daemon identified by <DAEMON-NAME> caused the module to boot.

Kernel crash

The operating system software associated with the module caused the module to boot.

Reboot requested through database

The reboot occurred because of a request made through the CLI or other API.

Uncontrolled reboot

The reason for the reboot is not known.

Examples

Showing the boot history of the active management module:

```
switch# show boot-history
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs

Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

Firmware management commands

`copy {primary | secondary} <REMOTE-URL>`


```
copy {primary | secondary} <REMOTE-URL> [vrf <VRF-NAME>]
```

Description

Uploads a firmware image to a TFTP or SFTP server.

Parameter	Description
{primary secondary}	Selects the primary or secondary image profile to upload. Required
<REMOTE-URL>	Specifies the URL to receive the uploaded firmware using SFTP or TFTP. For information on how to format the remote URL, see URL formatting for copy commands.
vrf <VRF-NAME>	Specifies a VRF name. Default: default.

Examples

TFTP upload:

```
switch# copy primary tftp://192.0.2.0/00_10_00_0002.swi
##### 100.0%
Verifying and writing system firmware...
```

SFTP upload:

```
switch# copy primary sftp://swuser@192.0.2.0/00_10_00_0002.swi
swuser@192.0.2.0's password:
Connected to 192.0.2.0.
sftp> put primary.swi XL_10_00_0002.swi
Uploading primary.swi to /users/swuser/00_10_00_0002.swi
primary.swi                100% 179MB 35.8MB/s 00:05
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy {primary | secondary} <FIRMWARE-FILENAME>

```
copy {primary | secondary} <FIRMWARE-FILENAME>
```

Description

Copies a firmware image to USB storage.

Parameter	Description
{primary secondary}	Selects the primary or secondary image from which to copy the firmware. Required
<FIRMWARE-FILENAME>	Specifies the name of the firmware file to create on the USB storage device. Prefix the filename with <code>usb:/</code> . For example: <code>usb:/firmware_v1.2.3.swi</code> For information on how to format the path to a firmware file on a USB drive, see USB URL.

Examples

```
switch# copy primary usb:/11.10.00.0002.swi
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy primary secondary

copy primary secondary

Description

Copies the firmware image from the primary to the secondary location.

Examples

```
switch# copy primary secondary
The secondary image will be deleted.

Continue (y/n)? y
Verifying and writing system firmware...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy <REMOTE-URL>

copy <REMOTE-URL> {primary | secondary} [vrf <VRF-NAME>]

Description

Downloads and installs a firmware image from a TFTP or SFTP server.

Parameter	Description
<REMOTE-URL>	Specifies the URL from which to download the firmware using SFTP or TFTP. TFTP format: tftp://<IP-ADDR>[:<PORT-NUM>] [;blocksize=<Value>]/<FILENAME> SFTP format: sftp://<USERNAME>@<IP-ADDR> [:<PORT-NUM>]/<FILENAME>
{primary secondary}	Selects the primary or secondary image profile for receiving the downloaded firmware. Required.
vrf <VRF-NAME>	Specifies the name of a VRF. Default: default.

TFTP usage

To specify a URL with:

- an IPv4 address: tftp://1.1.1.1/a.txt
- an IPv6 address: tftp://[2000::2]/a.txt
- a hostname: tftp://hpe.com/a.txt

To specify TFTP with:

- the port number of the server in the URL: tftp://1.1.1.1:12/a.txt
- the blocksize in the URL: tftp://1.1.1.1;blocksize=1462/a.txt
The valid blocksize range is 8 to 65464.
- the port number of the server and blocksize in the URL: tftp://1.1.1.1:12;blocksize=1462/a.txt

To specify a file in a directory of URL: tftp://1.1.1.1/dir/a.txt

SFTP usage

To specify:

- A URL with an IPv4 address: sftp://user@1.1.1.1/a.txt
- A URL with an IPv6 address: sftp://user@[2000::2]/a.txt
- A URL with a hostname: sftp://user@hpe.com/a.txt
- SFTP port number of a server in the URL: sftp://user@1.1.1.1:12/a.txt

- A file in a directory of URL: `sftp://user@1.1.1.1/dir/a.txt`
- To specify a file with absolute path in the URL: `sftp://user@1.1.1.1//home/user/a.txt`

Examples

TFTP download:

```
switch# copy tftp://192.10.12.0/ss.10.00.0002.swi primary
The primary image will be deleted.

Continue (y/n)? y
##### 100.0%
Verifying and writing system firmware...
```

SFTP download:

```
switch# copy sftp://swuser@192.10.12.0/ss.10.00.0002.swi primary
The primary image will be deleted.

Continue (y/n)? y
The authenticity of host '192.10.12.0 (192.10.12.0)' can't be established.
ECDSA key fingerprint is SHA256:L64khLwlyLgXlARKRMiwcAAK8oRaQ8C0oWP+PkGBXHY.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '192.10.12.0' (ECDSA) to the list of known hosts.
swuser@192.10.12.0's password:
Connected to 192.10.12.0.
Fetching /users/swuser/ss.10.00.0002.swi to ss.10.00.0002.swi.dnld
/users/swuser/ss.10.00.0002.swi          100% 179MB 25.6MB/s   00:07
Verifying and writing system firmware...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy secondary primary

copy secondary primary

Description

Copies the firmware image from the secondary to the primary location.

Examples

```
switch# copy secondary primary
The primary image will be deleted.

Continue (y/n)? y
Verifying and writing system firmware...
```

```
switch# copy sftp://stor@192.22.1.0/im-switch.swi primary vrf default
The primary image will be deleted.

Continue (y/n)? y
The authenticity of host '192.22.1.0 (192.22.1.0)' can't be established.
ECDSA key fingerprint is SHA256:MyI1xbdKnehYut0NLfL69gDpNzCmZqBVvBaRR46m7o8.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '192.22.1.0' (ECDSA) to the list of known hosts.
stor@192.22.1.0's password:
Connected to 192.22.1.0.
sftp> get c8d5b9f-topflite.swi c8d5b9f-topflite.swi.dnld
Fetching /home/dr/im-switch.swi to c8d5b9f-topflite.swi.dnld
/home/dr/im-switch.swi          100% 226MB 56.6MB/s 00:04

Verifying and writing system firmware...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

copy <STORAGE-URL>

copy <STORAGE-URL> {primary | secondary}

Description

Copies, verifies, and installs a firmware image from a USB storage device connected to the active management module.

Parameter	Description
<STORAGE-URL>	Specifies the name of the firmware file to copy from the storage device. Required. USB format: usb:/<FILENAME>
{primary secondary}	Selects the primary or secondary image profile for receiving the copied firmware.

USB usage

To specify a file:

- In a USB storage device: `usb:/a.txt`
- In a directory of a USB storage device: `usb:/dir/a.txt`

Examples

```
switch# copy usb:/11.10.00.0002.swi primary
The primary image will be deleted.

Continue (y/n)? y

Verifying and writing system firmware...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.



Applies only to the Aruba 4100i Switch Series.

Dynamic Segmentation (DS) is an enterprise network solution that combines AOS-CX security and networking features to dynamically place clients into network segments based on client credentials. The client network segments are dynamically carved out of the enterprise networks when on-boarding secure clients. With dynamic segmentation, there are multiple ways to handle client traffic:

- Locally switched to a VLAN
- User Based Tunnels (UBT).

In both solutions, once authenticated (using MAC-Auth or 802.1X) an enterprise client is bound to a network role and a VLAN is associated with the role. User traffic is then placed on the VLAN (known as the role VLAN) corresponding to the role to which the user belongs. Role association is defined using the individual client authentication mode or using device-profile based authentication.

The administrator must pre-configure all potential role VLANs and VRFs in all access switches (and additional configuration such as IGMP snooping on VLAN, PIM RP, etc.) at the gateway. The switch ensures that the role VLANs and VRFs are instantiated only upon client on-boarding on the target VLAN (using the command `system vlan-client-presence-detect`). This ensures that unnecessary broadcast domain creations and route learning do not occur.



There is no need to provision VLANs on the switch for user-based tunneling. The reserved VLAN is used by default.

User-based tunneling



Applies only to the Aruba 4100i Switch Series.

User-based tunneling uses GRE to tunnel ingress traffic on a switch interface to a mobility gateway for further processing. User-based tunneling enables a mobility gateway to provide a centralized security policy, using per-user authentication and access control to ensure consistent access and permissions.

Applications of user-based tunneling include:

- Traffic segmentation: Enables splitting of traffic based on user credentials, rather than the physical port to which a user is connected. For example, guests on a corporate network can be assigned to a specific VLAN with access and firewall policies defined to protect the network. Traffic from computers/laptops can be tunneled, while allowing VoIP traffic to move freely through the wired network.
- Authentication of PoE devices: Many devices that require power over Ethernet (PoE) and network access, such as security cameras, payment card readers, and medical devices, do not have built-in security software. As a result, these devices can pose a risk to networks. User-based tunneling can authenticate these devices and tunnel their traffic to a mobility gateway, harnessing the firewall and policy capabilities to secure the network.

At the most basic level User-Based Tunneling has two components:

- **User-Roles** refers to the ability to assign roles, on the fly, to a wired device/user, based on such things as the access method of a client. When leveraging ClearPass, additional context can be added, such as time-of-day and type-of-machine. As a result, IT staff no longer must pre-configure an access-port to VLAN and uplinks.
- **Tunneling** is the ability to tunnel traffic back to an Aruba Mobility Gateway (previously known as tunneled-node).

User-based tunneling supports two types of gateway deployments:

- Standalone Gateway Support
- Clustered Gateway Support



The recommended gateway version for user-based tunneling is 8.5 or greater.

The following commands are required to configure UBT:

- `ip source-interface`
- `ubt`
- `ubt-client-vlan`



`ubt-client-vlan` is needed for the local vlan or reserved vlan mode, but it is not needed for vlan-extend mode.



`ubt-mode vland-extend` is needed for vlan extend mode.

Components of user-based tunneling

Clients and devices

Traditionally, ports were labeled with a color and a color was assigned to a specific device. With colorless ports, all ports on an access switch are set to authenticate with both 802.1X and MAC Authentication. When a device connects to the network it is authenticated using either MAC Authentication or 802.1X and triggers an enforcement policy from ClearPass, which contains an enforcement profile with a user role configuration.

Access switches

Access switches authenticate users connected to the switch. Once a device or user is authenticated, a role is applied to the device or user. A role is a set of attributes and policies that is applied to the device or user. This user role can exist locally on an access switch or on ClearPass as part of an enforcement profile.

Mobility gateway cluster

The Aruba Mobility Gateway has many built-in security and application capabilities tailored specifically to wireless traffic. However, this can be extended as well to wired traffic. This is the main reason to tunnel traffic from an Aruba access switch to a gateway, so the wired, tunneled traffic can take advantage of the gateway's firewall capabilities and client applications.

Aruba ClearPass Policy Manager

ClearPass assigns enforcement policies and profiles containing user role information based on profiled devices or authenticated user information.

How it works

When first configuring the switch, the *tunneling profile* must be configured first. This is done using the command `ubt zone`. Within this context, the primary gateway IP address can be configured, which should be the physical IP of one of the cluster members. Once the gateway information is known on the switch and the UBT service is enabled, the switch then performs a handshake with the gateway to determine its reachability and to discover the version information.

When reachability is confirmed, the switch executes a switch bootstrap, and sends a bootstrap message to the gateway, similar to an AP Hello between an AP and a gateway. This bootstrap control packet contains user role information. Once the gateway receives the message, it replies with an acknowledge message. When acknowledged, the switch updates its local data structures with a bucket map and gateway node list, which is used for mapping users to gateways and client load balancing.

After the bucket map list is downloaded to the switch, a GRE heartbeat is then started between the switch and the gateway, forming a tunnel. A regular heartbeat, using GRE, is exchanged with the gateway, which then serves as the switch anchor gateway (SAC). This is the `primary-gateway ip` in the `ubt zone` command. A secondary heartbeat is also established with a standby gateway, acting as a secondary switch anchor gateway (s-SAC).

When a user connects to a secure port, the authentication sub-system on the switch sends a RADIUS request to the RADIUS server (for example, ClearPass Policy Manager), which authenticates the user and returns a user role to the switch in the form of a local user role (LUR) or vendor-specific attribute (VSA).

Aruba utilizes the concept of a user role which contains user policy and access to the network based on the role. A user-role can contain ACL/QoS policy, captive portal, VLAN information (used for locally switched traffic), and device attributes. When the user role VSA, received from the RADIUS server, is applied to the user, a command to redirect traffic to a gateway can be included within the user role. This is defined with the `gateway zone` command which causes tunneling to be enabled. The authentication sub-system notifies the tunneling subsystem on the switch, providing a gateway or secondary role. The gateway or secondary role is the user role on the gateway where policy will generally exist for tunneled users, and where firewall and security policies are applied. This can also be the same role used for wireless users and can be reused for wired users, if feasible.

The gateway role information sent to the switch tunneling subsystem is an indication to the gateway that it has to enforce additional policies on the user's traffic based on the policy configuration associated with the secondary role and the tunnel. This secondary role can be downloaded directly to the gateway. When the primary gateway or cluster is not reachable, the SAC tunnel is formed with the backup gateway and the clients are tunneled to the backup.

Points to remember

■ UBT Mode: Local VLAN

- UBT is supported on the default VRF and non-default VRF.
- Source interface is specified using command `ip source-interface`.
- VLAN is specified using command `ubt-client-vlan`.
- `ubt-client-vlan` should not be used on any other feature on the switch except for the client IP address tracking feature.
- UBT does not support tagged clients.
- UBT clients and non-UBT clients on same VLAN and same port is not supported.
- Source interface change: Disable UBT, change the source-interface, enable UBT.

■ UBT Mode: VLAN extend

- UBT is supported on the default VRF and non-default VRF.
- Source interface is specified using command `ip source-interface`.

- UBT client vlan is defined under role.
- DHCP snooping and ND-snooping should not be enabled on a UBT client assigned VLAN.
- IGMP snooping should not be enabled on a UBT client assigned VLAN.
- The VLAN on which UBT clients are placed should not be configured on the switch uplink.
- UBT clients and non-UBT clients on the same VLAN on the same switch is not supported.
- Source interface change: Disable UBT, change the source-interface, enable UBT.

■ Gateway DUR

- Downloadable gateway role is supported with switch VSA only. Mixed mode role configuration is supported ((switch LUR + gateway radius VSA) + gateway DUR). Switch mixed role is used to send other role attributes along with VSA.
 - Use `aaa authentication port-access radius-override enable` to enable.
- CPPM server FQDN/hostname configuration is supported.



Downloadable switch user role and multi-zone are not supported on the 4100i switch.

For information on IP Client Tracker, refer to the IP Client Tracker chapter in the Fundamentals Guide.

■ PC behind an IP phone

You should not have a PC and phone on the same VLAN on the same port when the PC is a UBT client and the phone is a non-UBT client. If you do, UBT clients broadcast/multicast packets will return to the same port and corrupt the phone MAC table.

■ Clients behind an L2 switch on the same VLAN

You should not have clients behind an L2 switch in a UBT environment. If UBT and non-UBT clients are behind an L2 switch on the same VLAN, this will cause duplicate packets. Broadcast/multicast packets will be copied to the tunnel and locally, causing the client to receive duplicate packets and network instability.

■ Different user role access VLANs on the same port in UBT 1.0 mode for the 4100i switch

Two users with different user role access VLANs on the same switch port is not supported. This will lead to a bootstrap failure on the controller for the second user.



Connecting the client directly into switch ports or behind VoIP is recommended.

Comparison between UBT modes

UBT Mode: Local VLAN	UBT Mode: VLAN extend
Switch unaware of UBT user VLAN	Switch is aware of user VLAN
Colorless ports: No UBT user VLAN config at switch	Colorless ports: UBT User VLAN config is required on switch
VLAN assignment by gateway	VLAN assignment by switch
Supports only untagged UBT users	Supports both tagged/untagged UBT users

UBT Mode: Local VLAN	UBT Mode: VLAN extend
Gateway replicates the broadcast/multicast traffic (converting bcast/mcast to unicast) and sends it to every UBT client	Single dedicated multicast GRE tunnel will be established between the gateway and switch for Broadcast/Multicast traffic
Gateway forwards all broadcast/multicast traffic to the UBT clients which are part of the same VLAN	Switch will forward the broadcast/multicast traffic to the UBT clients which are part of the same VLAN
The unicast/multicast/broadcast traffic from gateway to switch is sent to the clients via the same UAC tunnel	The unicast traffic from gateway to switch is sent through the UAC tunnel and multicast/broadcast traffic via Multicast GRE tunnel
Multicast traffic will be sent to the client which send join	Multicast traffic will be sent to all UBT clients on the same VLAN

User-based tunneling commands

backup-controller ip

```
backup-controller ip <IP-ADDR>
no backup-controller ip <IP-ADDR>
```

Description

Specifies the IP address of the backup controller for the UBT zone.
The no form of this command deletes the IP address of the backup controller.

Parameter	Description
<IP-ADDR>	Specifies the IP address of the backup controller.

Examples

Specifying the backup controller ip address for zone1:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# backup-controller ip 10.116.51.11
```

Delete the configured backup controller IP address:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# no backup-controller ip 10.116.51.11
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt-<ZONE-NAME>	Administrators or local user group members with execution rights for this command.

enable

enable
no enable

Description

Enables the UBT zone.

The `no` form of this command disables the UBT zone.

Examples

Enabling UBT for zone `zone1`:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# enable
```

Disabling UBT for `zone1`:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# no enable
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt-<ZONE-NAME>	Administrators or local user group members with execution rights for this command.

ip source-interface

ip source-interface {all | ubt} {interface <IFNAME> | <IPV4-ADDR>} [vrf <VRF-NAME>]
no ip source-interface {all | ubt} {interface <IFNAME> | <IPV4-ADDR>} [vrf <VRF-NAME>]

Description

Sets a single source IP address for the UBT zone VRF. This ensures that all traffic sent by UBT zone/VRF has the same source IP address, regardless of how it egresses the switch.

This command provides two ways to set the source IP addresses: either by specifying a static IP address, or by using the address assigned to a switch interface. If you define both options, then the static IP address takes precedence.

The `no` form of this command deletes the single source IP address for UBT.

Parameter	Description
all	When used no other parameters are required.
interface <IFNAME>	Specifies the name of the interface from which UBT obtains its source IP address. The interface must have a valid IP address assigned to it. If the interface has both a primary and secondary IP address, the primary IP address is used.
<IPV4-ADDR>	Specifies the source IP address to use for UBT. The IP address must be defined on the switch, and it must exist on the specified VRF, Default: default. Specify the address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.
vrf <VRF-NAME>	Specifies the name of the VRF from which the UBT zone sets its source IP address.

Examples

Setting interface 1/1/7 as the source address for UBT for VRF default:

```
switch(config)# ip source-interface ubt interface 1/1/7 vrf default
```

Deleting the configured source interface 1/1/7 as the source address for UBT for VRF default:

```
switch(config)# no ip source-interface ubt interface 1/1/7 vrf default
```

Specifying the static IP address 1.1.1.1 as the source address for UBT for VRF default:

```
switch(config)# ip source-interface ubt 1.1.1.1 vrf default
```

Deleting the configured ip address as the source address for UBT for VRF default:

```
switch(config)# no ip source-interface ubt 1.1.1.1 vrf default
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

papi-security-key

```
papi-security-key [{ciphertext <SEC-KEY> | plaintext <SEC-KEY>}]
no papi-security-key
```

Description

Specifies the shared security key used to encrypt UBT PAPI messages exchanged between the switch and the controller cluster for the zone.

The `no` form of this command deletes the shared security key .

Parameter	Description
<code>ciphertext <SEC-KEY></code>	Specifies an encrypted security key.
<code>plaintext <SEC-KEY></code>	Specifies a plaintext security key. Range: 10 to 64 characters. NOTE: When the security key is not provided on the command line, plaintext security key prompting occurs upon pressing Enter. The entered security key characters are masked with asterisks..

Examples

Specifying the PAPI security key for UBT zone `zone1` as plaintext:

```
switch(config)# ubt zone zone1  
switch(config-ubt-zone1)# papi-security-key plaintext F82#450b
```

Specifying the PAPI security key for UBT `zone1` with plaintext prompting:

```
switch(config)# ubt zone zone1  
switch(config-ubt-zone1)# papi-security-key  
Enter the PAPI security key: *****  
Re-Enter the PAPI security key: *****
```

Specifying the PAPI security key for UBT `zone1` as ciphertext:

```
switch(config)# ubt zone zone1  
switch(config-ubt-zone1)# papi-security-key ciphertext AQBapdAVz5...RmH3+4cpg=
```

Removing the PAPI security key for UBT `zone1`:

```
switch(config)# ubt zone zone1  
switch(config-ubt-zone1)# no papi-security-key
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt-<ZONE-NAME>	Administrators or local user group members with execution rights for this command.

primary-controller ip

```
primary-controller ip <IP-ADDR>
no primary-controller ip <IP-ADDR>
```

Description

Specifies the IP address of the primary controller IP address for the zone.
The `no` form of this command deletes the IP address of the primary controller.

Parameter	Description
<IP-ADDR>	Specifies the IP address of the primary controller.

Examples

Specify the primary controller IP address for `zone1`:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# primary-controller ip 10.116.51.10
```

Delete the configured primary controller IP address:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# no primary-controller ip 10.116.51.10
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt-<ZONE-NAME>	Administrators or local user group members with execution rights for this command.

sac-heartbeat-interval

```
sac-heartbeat-interval <TIME>
no sac-heartbeat-interval <TIME>
```

Description

Specifies the SAC heartbeat refresh time interval in seconds.
The `no` form of this command sets the heartbeat interval to the default value.

Parameter	Description
<TIME>	Specifies the SAC heartbeat refresh time interval in seconds. Range: 1 to 8. Default: 1.

Examples

Specifying a heartbeat refresh interval of 1 for UBT zone1:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# sac-heartbeat-interval 1
```

Deleting the configured heartbeat refresh interval:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# no sac-heartbeat-interval
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt-<ZONE-NAME>	Administrators or local user group members with execution rights for this command.

show ip source-interface ubt

```
show ip source-interface ubt
```

Description

Displays source IP address configuration information for the UBT zone.

Examples

Showing source IP address configuration information:

```
switch(config)# show ip source-interface ubt

Source-interface Configuration Information
-----
Protocol      Src-Interface      Src-IP              VRF
-----
ubt           vlan10             10.1.1.2            default
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show capacities ubt

show capacities ubt

Description

Shows the maximum number of UBT clients and zones which can be configured in the system.

Example

Showing maximum number of UBT clients and zones which can be configured:

```
switch# show capacities ubt

System Capacities: Filter UBT
Capacities Name                                     Value
-----
Maximum number of UBT clients in a system           768
Maximum number of UBT zones                         1
```

On a 24 port 4100i switch, the max number of UBT clients is 768. On a 12 port 4100i switch, the max number of UBT clients is 384.

If TCAM resources are utilized by other features and not available for UBT, UBT user-bootstrap will fail and result in a resource unavailable error message.

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ubt

```
show ubt [brief]
show ubt zone <ZONE-NAME> [brief]
```

Description

Shows global configuration information for UBT in addition to detailed or brief information for a specific UBT zone.

Parameter	Description
zone <ZONE-NAME>	Specifies the name of a zone. Length: 1 to 64 characters.
brief	Displays brief information.

Examples

Showing global UBT configuration information where local-VLAN mode has been configured:

```
switch# show ubt

Zone Name           : zone1
UBT Mode            : local-vlan
Primary Controller  : 10.116.51.10
Backup Controller   : 10.116.51.11
SAC HeartBeat Interval : 1
UAC KeepAlive Interval : 60
Reserved VLAN Identifier : 4094
VRF Name            : default
Admin State         : ENABLED
PAPI Security Key   : AQBapdxySvGPvdTl ... bL4FE=
```

Showing global UBT configuration information where VLAN-extend mode has been configured:

```
switch# show ubt

Zone Name           : zone1
UBT Mode            : vlan-extend
Primary Controller  : 10.116.51.10
Backup Controller   : 10.116.51.11
SAC HeartBeat Interval : 1
UAC KeepAlive Interval : 60
Reserved VLAN Identifier : -NA-
VRF Name            : default
Admin State         : ENABLED
PAPI Security Key   : AQBapdxySvGPvdTlkYn1 ... bL4FE=
```

Showing global UBT configuration information with operational state down failure reason:

```
switch# show ubt

Zone Name           : my-zone
UBT Mode            : local-vlan
Primary Controller  : 10.116.51.10
Backup Controller   : 10.116.51.11
SAC HeartBeat Interval : 1
```

```

UAC KeepAlive Interval      : 60
Reserved VLAN Identifier    : 4094
VRF Name                    : my-vrf
Admin State                 : ENABLED
PAPI Security Key          :
AQBapdxySvGPvdTlkYn1/naKX403jKHrm28xLYfO6mLOK499BwAAAHdJp/bL4FE=
Operational State          : up

Zone Name                   : my-zone2
UBT Mode                    : local-vlan
Primary Controller         : 10.116.51.10
Backup Controller          : 10.116.51.11
SAC HeartBeat Interval     : 1
UAC KeepAlive Interval     : 60
Reserved VLAN Identifier    : 4094
VRF Name                    : my-vrf2
Admin State                 : ENABLED
PAPI Security Key          :
AQBapdxySvGPvdTlkYn1/naKX403jKHrm28xLYfO6mLOK499BwAAAHdJp/bL4FE=
Operational State          : down
Failure Reason              : Controller is unreachable

```

Showing brief global UBT configuration information where local-VLAN mode has been configured:

```

switch(config)# show ubt brief
-----
Zone Name      UBT Mode      Primary Controller Address  VRF Name      Status
Operational State
-----
zone1          local-vlan     10.116.51.10               default        Enabled
up
zone2          local-vlan     20.116.51.20               vrf2          Enabled
down
zone3          local-vlan     30.116.51.30               vrf3          Enabled
up

```

Showing brief global UBT configuration information where VLAN-extend mode has been configured:

```

switch# show ubt brief
-----
Zone Name      UBT Mode      Primary Controller Address  VRF Name      Status
Operational State
-----
zone1          vlan-extend    10.116.51.10               default        Enabled
up
zone2          vlan-extend    20.116.51.20               vrf2          Enabled
down
zone3          vlan-extend    30.116.51.30               vrf3          Enabled
up

```

Showing brief configuration for UBT zone1 where local-VLAN mode has been configured:

```

switch# show ubt zone zone1 brief

```

Zone Name	UBT Mode	Primary Controller Address	VRF Name	Status
zone1	local-vlan	10.116.51.10	default	Enabled

Showing brief configuration for UBT zone1 where VLAN-extend mode has been configured:

```
switch# show ubt zone zone1 brief
```

Zone Name	UBT Mode	Primary Controller Address	VRF Name	Status
zone1	vlan-extend	10.116.51.10	default	Enabled

Showing brief global UBT configuration information where VLAN-extend mode has been configured:

```
switch# show ubt zone zone1 brief
```

Zone Name	UBT Mode	Primary Controller Address	VRF Name	Status
zone1	vlan-extend	10.116.51.10	default	Enabled

Command History

Release	Modification
10.09	■ Failure Reason field added in the output of show ubt command. ■ Operational State column added in the output of show ubt brief command.
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ubt information

```
show ubt information
show ubt information zone <ZONE-NAME>
```

Description

Shows SAC and UAC information for UBT. Specifying a zone name displays UBT information for that zone.

Parameter	Description
<i>ZONE-NAME</i>	Specifies UBT zone name. Maximum characters: 64.

Examples

Showing SAC and UAC information for the tunneled node server:

```
switch(config)# show ubt information

=====
Zone zone1:
=====
SAC Information :

  Active      : 10.1.1.2
  Standby     : 10.1.1.3

Node List Information :

  Cluster Name      : cluster1

  Cluster Alias Name :

  Node List        :
  -----
    10.1.1.2
    10.1.1.3
    10.1.1.4

Bucket Map Information :

Bucket Map Active   : [0...255]

Bucket ID  A-UAC      S-UAC      Connectivity
-----
0          10.1.1.2    10.1.1.3    L2
1          10.1.1.3    10.1.1.4    L2
2          10.1.1.4    10.1.1.2    L2
...
```

Showing SAC and UAC information for zone1:

```
switch(config)# show ubt information zone zone1

=====
Zone zone1:
=====
SAC Information :

  Active      : 10.1.1.2
  Standby     : 10.1.1.3

Node List Information :

  Cluster Name      : cluster1

  Cluster Alias Name :

  Node List        :
  -----
    10.1.1.2
    10.1.1.3
```

10.1.1.4

Bucket Map Information :

Bucket Map Active : [0...255]

Bucket ID	A-UAC	S-UAC	Connectivity
0	10.1.1.2	10.1.1.3	L2
1	10.1.1.3	10.1.1.4	L2
2	10.1.1.4	10.1.1.2	L2
...			

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ubt state

```
show ubt state
show ubt state zone <ZONE-NAME>
show ubt state zone <ZONE-NAME> uac-ip <UAC-ADDR>
```

Description

Shows the global UBT state.

Specifying a zone shows the UBT state of that zone.

Specifying a UAC IP address shows the UBT state of that UAC.

Parameter	Description
zone <ZONE-NAME>	Specifies UBT zone name. Maximum characters: 64.
uac-ip <UAC-ADDR>	Specifies the IP address of the user anchor controller for which to view user information. Specify the address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

Examples

Showing the UBT state where local-VLAN mode has been configured:

```
switch# show ubt state
=====
```

```

Zone zone1:
=====
Local Conductor Server (LCS) State:
LCS Type      IP Address    State              Role
-----
Primary       : 10.1.1.2      ready_for_bootstrap operational_primary
Secondary     : 10.1.1.10     ready_for_bootstrap operational_secondary
Switch Anchor Controller (SAC) State:
              IP Address    MAC Address        State
-----
Active        : 10.1.1.2      00:0b:86:b7:62:9f  registered
Standby       : 10.1.1.3      00:0b:86:b7:64:0f  registered
User Anchor Controller (UAC): 10.1.1.2
User          Port      State              Bucket ID  Gre Key  VLAN
-----
00:00:00:00:00:01 1/1/1  registered         5          13    4094
User Anchor Controller (UAC): 10.1.1.3
User          Port      State              Bucket ID  Gre Key  VLAN
-----
00:00:00:00:00:02 1/1/2  registered         4          14    4094

```

Showing the UBT state where VLAN-extend mode has been configured:

```

switch# show ubt state
=====
Zone zone1:
=====
Local Conductor Server (LCS) State:
LCS Type      IP Address    State              Role
-----
Primary       : 10.1.1.2      ready_for_bootstrap operational_primary
Secondary     : 10.1.1.10     ready_for_bootstrap operational_secondary
Switch Anchor Controller (SAC) State:
              IP Address    MAC Address        State
-----
Active        : 10.1.1.2      00:0b:86:b7:62:9f  registered
Standby       : 10.1.1.3      00:0b:86:b7:64:0f  registered
User Anchor Controller (UAC): 10.1.1.2
User          Port      State              Bucket ID  Gre Key  VLAN
-----
00:00:00:00:00:01 1/1/1  registered         5          13    10
User Anchor Controller (UAC): 10.1.1.3
User          Port      State              Bucket ID  Gre Key  VLAN
-----
00:00:00:00:00:02 1/1/2  registered         4          14    20

```

Showing the UBT state of zone1:

```

switch# show ubt state zone zone1
=====
Zone zone1:
=====
Local Conductor Server (LCS) State:

```

LCS Type	IP Address	State	Role
Primary	: 10.1.1.2	ready_for_bootstrap	operational_primary
Secondary	: 10.1.1.10	ready_for_bootstrap	operational_secondary

Switch Anchor Controller (SAC) State:

	IP Address	MAC Address	State
Active	: 10.1.1.2	00:0b:86:b7:62:9f	registered
Standby	: 10.1.1.3	00:0b:86:b7:64:0f	registered

User Anchor Controller(UAC): 10.1.1.2

User	Port	State	Bucket ID	Gre Key	VLAN
00:00:00:00:00:01	1/1/1	registered	5	13	10

User Anchor Controller(UAC): 10.1.1.3

User	Port	State	Bucket ID	Gre Key	VLAN
00:00:00:00:00:02	1/1/2	registered	4	14	20

Showing the UBT state of a UAC with IP address 15.212.219.57 where local-VLAN mode has been configured:

```
switch# show ubt state zone zone1 uac-ip 15.212.219.57
```

User Anchor Controller(UAC): 15.212.219.57

User	Port	State	Bucket ID	Gre Key	VLAN
00:00:00:00:00:04	1/1/20	registered	4	14	4000

Showing the UBT state of a UAC with IP address 15.212.219.55 where VLAN-extend mode has been configured:

```
switch# show ubt state zone zone1 uac-ip 15.212.219.55
```

User Anchor Controller(UAC): 15.212.219.55

User	Port	State	Bucket ID	Gre Key	VLAN
00:00:00:00:00:07	1/1/10	registered	40	14	20
00:00:00:00:00:08	1/1/12	registered	28	14	30

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

show ubt statistics

```
show ubt statistics
show ubt statistics zone <ZONE-NAME>
show ubt statistics zone <ZONE-NAME> uac-ip <UAC-ADDR>
```

Description

Displays statistics for UBT.

Specifying a zone shows the UBT statistics for that zone.

Specifying a UAC IP address shows the UBT statistics for that UAC.

Parameter	Description
zone <ZONE-NAME>	Specifies UBT zone name. Maximum characters: 64.
uac-ip <UAC-ADDR>	Specifies the IP address of the user anchor controller for which to view user information. Specify the address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

Examples

Showing UBT statistics where local-VLAN mode has been configured:

```
switch# show ubt statistics
UBT Statistics
=====
Zone zone1:
=====
Control Plane Statistics
Active : 10.1.1.1
  Bootstrap Tx : 10      Bootstrap Rx : 10
  Nodelist Rx : 25      Nodelist Ack Rx : 6
  Bucketmap Rx : 21     Bucketmap Ack Rx : 10
  Failover Tx : 4       Failover Ack Rx : 3
  Unbootstrap Tx : 7    Unbootstrap Ack Rx : 5
  Heartbeat Tx : 5      Heartbeat Rx : 3
Standby : 10.1.1.2
  Bootstrap Tx : 10      Bootstrap Rx : 10
  Nodelist Rx : 25      Nodelist Ack Rx : 6
  Bucketmap Rx : 21     Bucketmap Ack Rx : 12
  Failover Tx : 4       Failover Ack Rx : 3
  Unbootstrap Tx : 5    Unbootstrap Ack Rx : 3
  Heartbeat Tx : 7      Heartbeat Rx : 4
UAC : 10.1.1.1
  Bootstrap Tx : 10      Bootstrap Ack Rx : 5
  Unbootstrap Tx : 5    Unbootstrap Ack Rx : 5
  Keepalive Tx : 2      Keepalive Ack Rx : 2
UAC : 10.1.1.2
  Bootstrap Tx : 5      Bootstrap Ack Rx : 5
  Unbootstrap Tx : 0    Unbootstrap Ack Rx : 0
```

```

    Keepalive Tx      : 0
    Keepalive Ack Rx   : 0
Data Plane Statistics
  UAC      Packets Tx  Packets Rx
  -----
  10.1.1.1  45678      23456
  10.1.1.2  34567      23457
User Statistics
  UAC      User Count
  -----
  10.1.1.1    1
  10.1.1.2    2

```

Showing UBT statistics where VLAN-extend mode has been configured:

```

switch# show ubt statistics
UBT Statistics
=====
Zone zone1:
=====
Control Plane Statistics
  Active   : 10.1.1.3
    Bootstrap Tx      : 10
    Nodelist Rx       : 25
    Bucketmap Rx      : 21
    Failover Tx       : 4
    Unbootstrap Tx    : 7
    Heartbeat Tx      : 5
    Bootstrap Rx      : 10
    Nodelist Ack Rx   : 6
    Bucketmap Ack Rx  : 10
    Failover Ack Rx   : 3
    Unbootstrap Ack Rx : 5
    Heartbeat Rx      : 3
  Standby  : 10.1.1.4
    Bootstrap Tx      : 10
    Nodelist Rx       : 25
    Bucketmap Rx      : 21
    Failover Tx       : 4
    Unbootstrap Tx    : 5
    Heartbeat Tx      : 7
    Bootstrap Rx      : 10
    Nodelist Ack Rx   : 6
    Bucketmap Ack Rx  : 12
    Failover Ack Rx   : 3
    Unbootstrap Ack Rx : 3
    Heartbeat Rx      : 4
  UAC : 10.1.1.3
    Bootstrap Tx      : 10
    Unbootstrap Tx    : 5
    Keepalive Tx      : 2
    Bootstrap Ack Rx  : 5
    Unbootstrap Ack Rx : 5
    Keepalive Ack Rx  : 2
  UAC : 10.1.1.4
    Bootstrap Tx      : 5
    Unbootstrap Tx    : 0
    Keepalive Tx      : 0
    Bootstrap Ack Rx  : 5
    Unbootstrap Ack Rx : 0
    Keepalive Ack Rx  : 0
Data Plane Statistics
  SAC tunnel Rx      : 444
  Standby-SAC tunnel Rx : 0
  UAC      Packets Tx  Packets Rx
  -----
  10.1.1.3  45678      23456
  10.1.1.4  34567      23457
User Statistics
  UAC      User Count
  -----
  10.1.1.3    1
  10.1.1.4    2

```

Showing UBT statistics for zone1 where local-vlan mode has been configured:

```

switch# show ubt statistics zone zone1

UBT Statistics

Zone zone1:
Control Plane Statistics

Active : 10.1.1.3
  Bootstrap Tx : 10
  Nodelist Rx : 25
  Bucketmap Rx : 21
  Failover Tx : 4
  Unbootstrap Tx : 7
  Heartbeat Tx : 5
  Bootstrap Rx : 10
  Nodelist Ack Rx : 6
  Bucketmap Ack Rx : 10
  Failover Ack Rx : 3
  Unbootstrap Ack Rx : 5
  Heartbeat Rx : 3

Standby : 10.1.1.4
  Bootstrap Tx : 10
  Nodelist Rx : 25
  Bucketmap Rx : 21
  Failover Tx : 4
  Unbootstrap Tx : 5
  Heartbeat Tx : 7
  Bootstrap Rx : 10
  Nodelist Ack Rx : 6
  Bucketmap Ack Rx : 12
  Failover Ack Rx : 3
  Unbootstrap Ack Rx : 3
  Heartbeat Rx : 4

UAC : 10.1.1.3
  Bootstrap Tx : 10
  Unbootstrap Tx : 5
  Keepalive Tx : 2
  Bootstrap Ack Rx : 5
  Unbootstrap Ack Rx : 5
  Keepalive Ack Rx : 2

UAC : 10.1.1.4
  Bootstrap Tx : 5
  Unbootstrap Tx : 0
  Keepalive Tx : 0
  Bootstrap Ack Rx : 5
  Unbootstrap Ack Rx : 0
  Keepalive Ack Rx : 0

Data Plane Statistics

UAC      Packets Tx  Packets Rx
-----
10.1.1.3  45678          23456
10.1.1.4  34567          23457

User Statistics

UAC      User Count
-----
10.1.1.3  1
10.1.1.4  2

```

Showing UBT statistics for zone1 where VLAN-extend mode has been configured:

```

switch# show ubt statistics zone zone1

UBT Statistics

Zone zone1:
Control Plane Statistics

Active : 10.1.1.3
  Bootstrap Tx : 10
  Nodelist Rx : 25
  Bucketmap Rx : 21
  Failover Tx : 4
  Bootstrap Rx : 10
  Nodelist Ack Rx : 6
  Bucketmap Ack Rx : 10
  Failover Ack Rx : 3

```

```

Unbootstrap Tx : 7
Heartbeat Tx : 5

Standby : 10.1.1.4
Bootstrap Tx : 10
Nodelist Rx : 25
Bucketmap Rx : 21
Failover Tx : 4
Unbootstrap Tx : 5
Heartbeat Tx : 7

Unbootstrap Ack Rx : 5
Heartbeat Rx : 3

Bootstrap Rx : 10
Nodelist Ack Rx : 6
Bucketmap Ack Rx : 12
Failover Ack Rx : 3
Unbootstrap Ack Rx : 3
Heartbeat Rx : 4

UAC : 10.1.1.3
Bootstrap Tx : 10
Unbootstrap Tx : 5
Keepalive Tx : 2

UAC : 10.1.1.4
Bootstrap Tx : 5
Unbootstrap Tx : 0
Keepalive Tx : 0

Bootstrap Ack Rx : 5
Unbootstrap Ack Rx : 0
Keepalive Ack Rx : 0

Data Plane Statistics

SAC tunnel Rx : 444
Standby-SAC tunnel Rx : 0

UAC      Packets Tx   Packets Rx
-----
10.1.1.3  45678           23456
10.1.1.4  34567           23457

User Statistics

UAC      User Count
-----
10.1.1.3  1
10.1.1.4  2

```

Showing the UBT statistics of a UAC with IP address 101.101.101.11:

```

switch# show ubt statistics zone zone1 uac-ip 101.101.101.11
Data Plane Statistics

SAC tunnel Rx : 6457
Standby-SAC tunnel Rx : 0

UAC      Packets Tx   Packets Rx
-----
101.101.101.11 : 145379605   145450113

```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show ubt users

```
show ubt users [ all | count | down | mac <MAC-ADDR> | {port <IF-NAME> | <IF-RANGE>} | up]
zone <ZONE-NAME>
```

Description

Displays user information for UBT.

Parameter	Description
all	Display information for all users.
count	Display the total number of users configured to tunnel traffic.
down	Display the users that are not able to tunnel traffic.
mac <MAC-ADDR>	Display user information based on MAC address.
port <IF-NAME> <IF-RANGE>	Display user information for a specific interface or range of interfaces. For example, port 1/1/1 or port 1/1/1-1/1/10.
up	Display user information that are active.
zone <ZONE-NAME>	Specifies UBT zone name. Maximum characters: 64.

Examples

Showing information for all users:

```
switch# show ubt users all
=====
Displaying All UBT Users for Zone: zone1
=====
Downloaded user roles are preceded by *
Port      Mac Address      Tunnel Status  Secondary UserRole  Failure Reason
-----
1/25      00:00:00:11:12:03  activated     authenticated      ---/---
```

Showing information for users of zone1:

```
switch# show ubt users all zone zone1
=====
Displaying All UBT Users for Zone: zone1
=====
Downloaded user roles are preceded by *
Port      Mac Address      Tunnel Status  Secondary UserRole  Failure Reason
-----
1/25      00:00:00:11:12:03  activated     authenticated      ---/---
```

Displaying the number of users that are tunneling traffic:

```
switch# show ubt users count

Total Number of Users using ubt Zone : zone1 is 2
=====
Total Number of Users in all the zones : 2
=====
```

Showing users that are down:

```
switch# show ubt users down

=====
Displaying UBT Users of Zone: zone1 having Tunnel Status DOWN
=====
Downloaded user roles are preceded by *
Port Mac Address      Tunnel Status      Secondary UserRole  Failure Reason
-----
1/25 00:00:00:11:12:03 activation_failed  authenticated      User bootstrap has
                                                failed
```

Showing information for users of zone1 that are down:

```
switch# show ubt users down zone zone1

=====
Displaying UBT Users of Zone: zone1 having Tunnel Status DOWN
=====
Downloaded user roles are preceded by *
Port Mac Address      Tunnel Status      Secondary UserRole  Failure Reason
-----
1/25 00:00:00:11:12:03 activation_failed  authenticated      User bootstrap has
                                                failed
```

Showing information for users on port 2/25:

```
switch# show ubt users port 2/25

=====
Displaying UBT Users of Zone: zone1
=====
Downloaded user roles are preceded by *
Port   Mac Address      Tunnel Status      Secondary UserRole  Failure Reason
-----
2/25   00:00:00:11:12:03   activated          authenticated        ---/---
```

Showing information for users that are up:

```
switch# show ubt users up

=====
Displaying UBT Users of Zone: zone1 having Tunnel Status UP
=====
Downloaded user roles are preceded by *
```

Port	Mac Address	Tunnel Status	Secondary UserRole	Failure Reason
1/25	00:00:00:11:12:03	activated	authenticated	---/---

Showing information for users of zone1 that are up:

```
switch# show ubt users up zone zone1
```

```
=====
```

Displaying UBT Users of Zone: zone1 having Tunnel Status UP

```
=====
```

Downloaded user roles are preceded by *

Port	Mac Address	Tunnel Status	Secondary UserRole	Failure Reason
1/25	00:00:00:11:12:03	activated	authenticated	---/---

Showing information for the user with MAC address 00:00:00:11:12:03:

```
switch# show ubt users mac 00:00:00:11:12:03
```

```
=====
```

Displaying UBT User of Zone: zone1 having MAC-Address: 00:00:00:11:12:03

Downloaded user roles are preceded by *

Port	Mac Address	Tunnel Status	Secondary UserRole	Failure Reason
1/25	00:00:00:11:12:03	activated	authenticated	---/---

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

uac-keepalive-interval

uac-keepalive-interval <TIME>
no uac-keepalive-interval <TIME>

Description

Specifies the UAC keep alive refresh time interval in seconds for the UBT zone.

The no form of this command sets the keep alive interval to the default value.

Parameter	Description
<TIME>	Specifies the UAC keep-alive refresh time interval in seconds. Range: 1 to 60. Default: 60.

Examples

Specifying a keepalive interval of 60 seconds for UBT `zone1`:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# uac-keepalive-interval 60
```

Deleting the configured UAC keepalive interval:

```
switch(config)# ubt zone zone1
switch(config-ubt-zone1)# no uac-keepalive-interval 60
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config-ubt- <i><ZONE-NAME></i>	Administrators or local user group members with execution rights for this command.

ubt

```
ubt zone <ZONE-NAME> vrf <VRF-NAME>
no ubt zone <ZONE-NAME> vrf <VRF-NAME>
```

Description

Creates a User Based Tunnel (UBT) zone with a specified zone name and VRF name. A UBT name is used to configure all UBT properties advertised by the UBT feature.

The `no` form of this command removes the specified UBT zone.

Parameter	Description
<i><ZONE-NAME></i>	Specifies a name for the UBT zone. Length: 1 to 64 characters.
<i><VRF-NAME></i>	Specifies the VRF on which to establish the UBT tunnel.

Examples

Creating UBT zone called `zone1` associated with a VRF called `default`:

```
switch(config)# ubt zone zone1 vrf default
```

Removing UBT zone `zone1` on VRF `default`:

```
switch(config)# no ubt zone zone1 vrf default
```


Deleting all UBT configurations:

```
switch(config)# no ubt
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

ubt-client-vlan

```
ubt-client-vlan <VLAN-ID>  
no ubt-client-vlan <VLAN-ID>
```

Description

Specifies the UBT Client VLAN or local VLAN. This VLAN is used in local-VLAN mode only. If the UBT client VLAN is configured in VLAN-extend mode it is ignored, this is the reserved VLAN that all client traffic uses to get to the gateway. At the gateway, VLAN and policy will be assigned to the client traffic. No other feature should be enabled on the UBT client VLAN.

The `no` form of this command removes the VLAN to use for tunneled clients.

Parameter	Description
<VLAN-ID>	Specifies the VLAN ID to use for tunneled clients. Range: 1-4094.

Examples

Creating VLAN 4000:

```
switch(config)# vlan 4000  
switch(config-vlan-4000)# no shutdown
```

Specifying UBT client VLAN 4000:

```
switch(config)# ubt-client-vlan 4000
```

Removing configured UBT client VLAN 4000:

```
switch(config)# no ubt-client-vlan 4000
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

ubt mode vlan-extend

```
ubt-mode vlan-extend
no ubt-mode [vlan-extend]
```

Description

Selects VLAN extended mode. When VLAN-extend mode is enabled clients are assigned to their UBT role-based VLAN in the hardware datapath.

The `no` form of the command selects the default local-VLAN mode. In local-VLAN mode clients are assigned to a local switch VLAN and associated with their UBT role-based VLAN when client traffic reaches the controller.

The default UBT mode is local-VLAN.

Examples

Setting the UBT mode to VLAN-extend:

```
switch(config)# ubt-mode vlan-extend
```

Setting the UBT mode back to the default of local-VLAN:

```
switch(config)# no ubt-mode
```

Command History

Release	Modification
10.08	--

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

Simple Network Management Protocol (SNMP) is an Internet-standard protocol used for managing and monitoring the devices connected to a network by collecting, organizing and modifying information about managed devices on IP networks.

Configuring SNMP

(The SNMP agent provides read-only access.)

Procedure

1. Enable SNMP on a VRF using the command `snmp-server vrf default`.
2. Set the system contact, location, and description for the switch with the following commands:
 - `snmp-server system-contact`
 - `snmp-server system-location`
 - `snmp-server system-description`
3. If required, change the default SNMP port on which the agent listens for requests with the command `snmp-server agent-port`.
4. By default, the agent uses the community string **public** to protect access through SNMPv1/v2c. Set a new community string with the command `snmp-server community`.
5. Configure the trap receivers to which the SNMP agent will send trap notifications with the command `snmp-server host`.
6. Create an SNMPv3 context and associate it with any available SNMPv3 user to perform context specific v3 MIB polling using the command `snmpv3 user`.
7. Create an SNMPv3 context and associate it with an available SNMPv1/v2c community string to perform context specific v1/v2c MIB polling using the command `snmpv3 context`.
8. Review your SNMP configuration settings with the following commands:
 - `show snmp agent-port`
 - `show snmp community`
 - `show snmp system`
 - `show snmpv3 context`
 - `show snmp trap`
 - `show snmp vrf`
 - `show snmpv3 users`
 - `show tech snmp`

Example 1

This example creates the following configuration:

- Sets the contact, location, and description for the switch to: **JaniceM, Building2, LabSwitch**.
- Sets the community string to **Lab8899X**.

```
switch(config)# snmp-server vrf default
switch(config)# snmp-server system-contact JaniceM
switch(config)# snmp-server system-location Building2
switch(config)# snmp-server system-description LabSwitch
switch(config)# snmp-server community Lab8899X
```

Example 2

This example creates the following configuration:

- Creates an SNMPv3 user named **Admin** using **sha** authentication with the plaintext password **mypassword** and using **des** security with the plaintext password **myprivpass**.
- Associates the SNMPv3 user `Admin` with a context named `newContext`.

```
switch(config)# snmpv3 user Admin auth sha auth-pass plaintext mypassword priv des
priv-pass plaintext myprivpass
switch(config)# snmpv3 user Admin context newContext
```



Refer to the SNMP Guide for SNMP Commands.



Aruba Central integration is only available on the 4100i switch.

The Aruba Central network management solution, a software-as-a-service subscription in the cloud, provides streamlined management of multiple network devices. AOS-CX switches are able to talk to Aruba Central and utilize cloud-based management functionality. Cloud-based management functionality allows for the deployment of network devices at sites with no or few dedicated IT personnel (branch offices, retail stores, and so forth). AOS-CX switches utilize secure communication protocols to connect to the Aruba Central cloud portal, and can coexist with corporate security standards, such as those mandating the use of firewalls.



When Aruba Central manages AOS-CX switches, it functions as the single source of truth and the Web UI operates in read-only mode.

This feature provides:

- Zero-touch provisioning
- Network Management/Remote monitoring
- Events/alerts notification
- Switch Configuration using templates
- Firmware management

Connecting to Aruba Central

AOS-CX switch downloads the location of Aruba Central server using:

- Command-line interface (CLI).
- Aruba Activate server.
- DHCP options provided during ZTP.

DHCP servers are used to connect to Central on-premise management.

If switch is unable to connect to Activate server, it retries to establish connection in exponential back off of 1s, 2s, 8s, 16s, 32s, 64s, 128s, and 256s. After the maximum back off of 256s, switch retries happen for every 5 minutes.



If the Network Time Protocol (NTP) is not enabled on the switch, it will synchronize the system time with the Activate server.

Custom CA certificate

To use custom CA certificate to connect to Aruba Central, AOS-CX switch downloads the certificate from Aruba Activate server.



-
- If there is no custom CA provided by Aruba Activate, the CA certificate present in the device is used.
 - Duplicate CA certificates from Aruba Activate server will be ignored.
 - If CA certificate is absent in consecutive responses from Aruba Activate server, the installed custom CA certificate in device will be removed.
 - Switch will have only one custom CA certificate installed from Aruba Activate Server.
 - The certificate installed from Aruba Activate server will not be displayed in the show commands.
-

Support mode in Aruba Central

When the AOS-CX switch is managed by Aruba Central, the switch configuration cannot be modified using other interfaces such as CLI or Web UI. The following command categories are blocked:

- auto-confirm
- boot
- checkpoint
- copy-in commands
- erase
- https-server
- mfgread
- mfgwrite
- port-access
- All configuration commands except the aruba-central command

In cases where a maintenance or troubleshooting activity requires configuration updates, aruba-central support-mode can be enabled to allow these operations.



The aruba-central support-mode enable or disable operation is effective only in the CLI session where it is executed and does not impact the other CLI sessions.

If the user tries to execute any command that is not allowed, an **Invalid input:** error message is displayed.

Aruba Central commands

aruba-central



Applies only to the 4100i switch.

```
aruba-central
no aruba-central
```

Description

Creates or enters the Aruba Central configuration context (`config-aruba-central`).

Example

Administrators or local user group members with execution rights for this command.

Creating the Aruba Central configuration context:

```
switch(config)# aruba-central
switch(config-aruba-central)#
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

aruba-central support-mode



Applies only to the 4100i switch.

```
aruba-central support-mode
no aruba-central support-mode
```

Description

Allows the device to be writable for all operations in Aruba Central lockout mode for troubleshooting. The no form of this command disables this activity.



Support-mode is disabled by default when the switch is managed by Aruba Central. This command is only effective in the CLI session where it is executed.

Examples

Configuring the device to be writable for all operations in Aruba Central lockout mode:

```
switch# aruba-central support-mode
switch#
```

Removing the configuration that allows the device to be writable for all operations in Aruba Central lockout mode:

```
switch# no aruba-central support-mode
switch#
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	Manager (#)	Administrators or local user group members with execution rights for this command.

configuration-lockout central managed



Applies only to the 4100i switch.

```
configuration-lockout central managed
no configuration-lockout central managed
```

Description

Configures the device to only be writable from Aruba Central. Aruba Central will be the only agent that can add, modify, or delete configurations on the device. The no form of this command disables this feature.



The no form of this command is only available when the device is disconnected from Aruba Central.

Usage

The AOS-CX switch connects to Aruba Central in either of two modes: monitor or managed. When the device is connected in monitor mode, Aruba Central monitors the configurations on the switch. When the device is connected in managed mode, the `configuration-lockout central managed` command does not allow configuration changes from other interfaces such as CLI or Web UI.

Examples

Configuring the device to only be writable from Aruba Central :

```
switch(config)# configuration-lockout central managed
switch# show configuration-lockout
configuration lockout
-----
central: managed
switch# sh aruba-central
Central admin state           :enable
Central location              :20.0.0.2:8083
VRF for connection           :default
Central connection status     :connected

Central source                :cli
Central source connection status :connected
Central source last connected on :Tue Feb 9 17:53:13 UTC 2021

Activate Server URL           :devices-v2.arubanetworks.com
CLI location                  :20.0.2:8083
CLI VRF                       :default
switch(config)# end
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	config	Administrators or local user group members with execution rights for this command.

disable



Applies only to the 4100i switch.

disable

Description

Disables connection to Aruba Central server.

When the connection is disabled, the switch does not attempt to connect to the Aruba Central server or fetch central location from any of the three sources (CLI/Aruba Activate/DHCP). It also disconnects any active connection to the Aruba Central server.

Example

```
switch(config-aruba-central) # disable
switch(config-aruba-central) #
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	config-aruba-central	Administrators or local user group members with execution rights for this command.

enable



Applies only to the 4100i switch.

enable

Description

Enables connection to Aruba Central server. When the connection is enabled, the switch attempts to download the location of the Aruba Central server in one of the following ways at startup and after the connection is lost:

- Using command-line interface (CLI).
- Connecting to Aruba Activate server.
- Using DHCP options provided during ZTP.

DHCP servers provide the options requested by the device to connect to Central, Central On-premise management, or the TFTP server.

Examples

```
switch(config-aruba-central) # enable
switch(config-aruba-central) #
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	config-aruba-central	Administrators or local user group members with execution rights for this command.

location-override



Applies only to the 4100i switch.

```
location-override <location> [vrf <VRF default>]
no location-override
```

Description

When `location` and `vrf` are configured, the switch overrides existing connections to Aruba Central. The switch attempts to establish connection to Aruba Central with the specified location and VRF with highest priority.

The `no` form of this command removes location override values from the Aruba Central configuration context.

Parameter	Description
<code><location></code>	Specifies one of these values: ■ <code><FQDN></code>: a fully qualified domain name. ■ <code><IPv4></code>: an IPv4 address. ■ <code><IPv6></code>: an IPv6 address.

Parameter	Description
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named default is used.

Examples

Configuring location override with location and VRF:

```
switch(config-aruba-central)# location-override aruba-central.com vrf default
switch(config-aruba-central)#
```

Configuring location override with location only:

```
switch(config-aruba-central)# location-override aruba-central.com
switch(config-aruba-central)#
```

Removing location override values from the Aruba Central configuration context:

```
switch(config-aruba-central)# no location-override
switch(config-aruba-central)#
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	config-aruba-central	Administrators or local user group members with execution rights for this command.

show aruba-central



Applies only to the 4100i switch.

```
show aruba-central
```

Description

Shows information about Aruba Central connection and the status of the Activate server connection.

Examples

Example of a switch that has the Aruba Central connection:

```

switch# show aruba-central
Central admin state           :enabled
Central location              : N/A
VRF for connection            : N/A
Central connection status     : N/A
Central source                : dhcp
Central source connection status : connection_failure
Central source last connected on : N/A
System time synchronized from Activate : True
Activate server URL           : 172.17.0.1
CLI location                  : N/A
CLI VRF                       : N/A
Source IP                     : N/A
Source IP Overridden          : false
Central support mode          : disabled

```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show running-config current-context



Applies only to the 4100i switch.

```
show running-config current-context
```

Description

Shows the running configuration for the current-context. If user is in the context of Aruba-Central(`config-aruba-central`), then Aruba Central running configuration is displayed.

Examples

Shows the running configuration of Aruba Central:

```

switch(config-aruba-central)# show running-config current-context
aruba-central
    disable

```

Command History


Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
4100i	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Port filtering is a feature in which packets that are ingressed through a source port can be blocked for egressing on a specific set of ports.

Figure 1 Port Filter Application

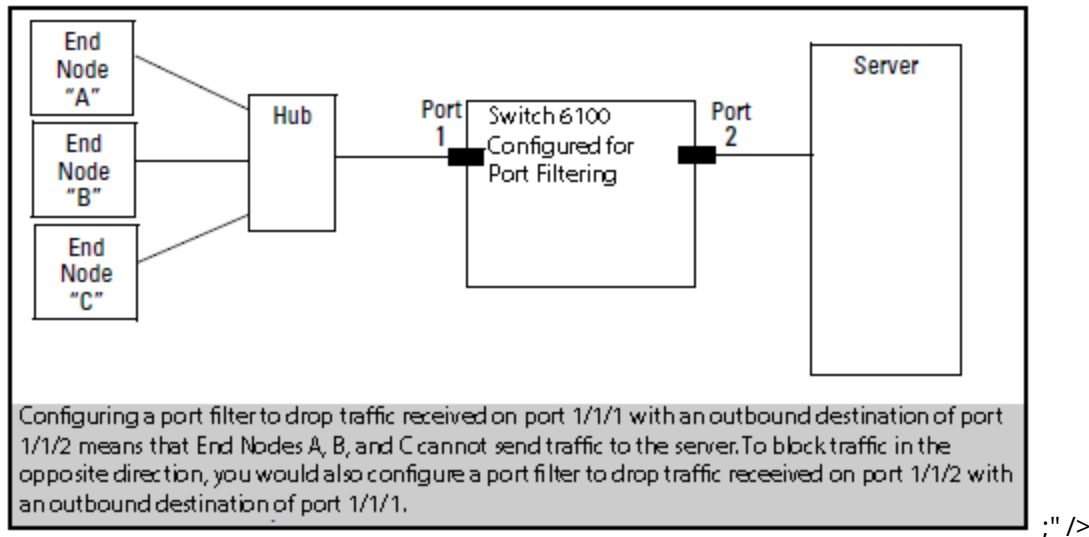

Port filtering commands

portfilter

```
portfilter <INTERFACE-LIST>
no portfilter [<INTERFACE-LIST>]
```

Description

Configures the specified ports so they do not egress any packets that were received on the source port specified in interface context.

The `no` form of this command removes the port filter setting from one or more ingress ports/LAGs.

Parameter	Description
<INTERFACE-LIST>	Specifies a list of ports/LAGs to be blocked for egressing. Specify a single interface or LAG, or a range as a comma-separated list, or both. For example: 1/1/1, 1/1/3-1/1/6, lag2, lag1-lag4.

Usage

When a port filter configuration is applied on the same ingress physical port/LAG, the configuration is updated with the new sets of egress ports/LAGs that are to be blocked for egressing and that are not a part of its previous configuration. Duplicate updates on an existing port filter configuration are ignored.

When egress ports/LAGs are removed from the existing port filter configuration of an ingress port/LAG, egressing is allowed again on those egress ports/LAGs for all packets originating from the ingress port/LAG.

The `no portfilter [<IF-NAME-LIST>]` command removes port filter configurations from the egress ports/LAGs listed in the `<IF-NAME-LIST>` parameter only. All other egress ports/LAGs in the port filter configuration of the ingress port/LAG remain intact.

If no physical ports or LAGs are provided for the `no portfilter` command, the command removes the entire port filter configuration for the ingress port/LAG.

Examples

Creating a filter that prevents packets received on port **1/1/1** from forwarding to ports **1/1/3-1/1/6** and to LAGs **1** through **4**:

```
switch(config)# interface 1/1/1
switch(config-if)# portfilter 1/1/3-1/1/6,lag1-lag4
```

Creating a filter that prevents packets received on LAG **1** from forwarding to ports **1/1/6** and LAGs **2** and **4**:

```
switch(config)# interface lag 1
switch(config-lag-if)# portfilter 1/1/6,lag2,lag4
```

Removing filters from an existing configuration that allows back packets received on port **1/1/1** to forward to ports **1/1/6** and LAGs **3** and **4**:

```
switch(config)# interface 1/1/1
switch(config-if)# no portfilter 1/1/6,lag3,lag4
```

Removing all filters from an existing configuration that allows back packets received on LAG **1** to forward to all the ports and LAGs:

```
switch(config)# interface lag 1
switch(config-lag-if)# no portfilter
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if config-lag-if	Administrators or local user group members with execution rights for this command.

show portfilter

```
show portfilter [<IFNAME>]
```

Description

Displays filter settings for all interfaces or a specific interface.

Parameter	Description
<code><IFNAME></code>	Specifies the ingress interface name. Specifies one of these values: ■ <code><FQDN></code>: a fully qualified domain name. ■ <code><IPv4></code>: an IPv4 address. ■ <code><IPv6></code>: an IPv6 address.

Examples

Displaying all port filter settings on the switch:

```
switch# show portfilter
Incoming   Blocked
Interface  Outgoing Interfaces
-----
1/1/1      1/1/3-1/1/6, lag1-lag2
1/1/3      1/1/1, 1/1/5, 1/1/7, 1/1/9, 1/1/11, 1/1/13, 1/1/15, 1/1/17, 1/1/19, 1/1/21,
          1/1/23, 1/1/25, 1/1/27, 1/1/29, 1/1/31, 1/1/33, 1/1/35
lag2       1/1/1, 1/1/3-1/1/6
```

Displaying the port filter settings for port **1/1/1**:

```
switch# show portfilter 1/1/1
Incoming   Blocked
Interface  Outgoing Interfaces
-----
1/1/1      1/1/3-1/1/6, lag1-lag2
```

Displaying the port filter settings for **LAG2**:

```
switch# show portfilter lag2
Incoming   Blocked
Interface  Outgoing Interfaces
-----
lag2       1/1/1, 1/1/3-1/1/6
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

The Domain Name System (DNS) is the Internet protocol for mapping a hostname to its IP address. DNS allows users to enter more readily memorable and intuitive hostnames, rather than IP addresses, to identify devices connected to a network. It also allows a host to keep the same hostname even if it changes its IP address.

Hostname resolution can be either static or dynamic.

- In static resolution, a local table is defined on the switch that associates hostnames with their IP addresses. Static tables can be used to speed up the resolution of frequently queried hosts.
- Dynamic resolution requires that the switch query a DNS server located elsewhere on the network. Dynamic name resolution takes more time than static name resolution, but requires far less configuration and management.

DNS client

The DNS client resolves hostnames to IP addresses for protocols that are running on the switch. When the DNS client receives a request to resolve a hostname, it can do so in one of two ways:

- Forward the request to a DNS name server for resolution.
- Reply to the request without using a DNS name server, by resolving the name using a statically defined table of hostnames and their associated IP addresses.

Configuring the DNS client

Procedure

1. Configure one or more DNS name servers with the command `ip dns server`.
2. To resolve DNS requests by appending a domain name to the requests, either configure a single domain name with the command `ip dns domain-name`, or configure a list of up to six domain names with the command `ip dns domain-list`.
3. To use static name resolution for certain hosts, associate an IP address to a host with the command `ip dns host`.
4. Review your DNS configuration settings with the command `show ip dns`.

Examples

This example creates the following configuration:

- Defines the domain **switch.com** to append to all requests.
- Defines a DNS server with IPv4 address of **1.1.1.1**.
- Defines a static DNS host named **myhost1** with an IPv4 address of **3.3.3.3**.
- DNS client traffic is sent on the default VRF (named **default**).

```

switch(config)# ip dns domain-name switch.com
switch(config)# ip dns server-address 1.1.1.1
switch(config)# ip dns host myhost1 3.3.3.3
switch(config)# exit
switch# show ip dns

```

```

VRF Name : default
Domain Name: switch.com
Name Server(s): 1.1.1.1

```

Host Name	Address
-----	-----
myhost1	3.3.3.3
switch#	

DNS client commands

ip dns domain-list

```

ip dns domain-list <DOMAIN-NAME> [vrf default]
no ip dns domain-list <DOMAIN-NAME> [vrf default]

```

Description

Configures one or more domain names that are appended to the DNS request. The DNS client appends each name in succession until the DNS server replies. Domains can be either IPv4 or IPv6. By default, requests are forwarded on the default VRF.

The `no` form of this command removes a domain from the list.

Parameter	Description
<code>list <DOMAIN-NAME></code>	Specifies a domain name. Up to six domains can be added to the list. Length: 1 to 256 characters.

Examples

This example defines a list with two entries: **domain1.com** and **domain2.com**.

```

switch(config)# ip dns domain-list domain1.com
switch(config)# ip dns domain-list domain2.com

```

This example removes the entry **domain1.com**.

```

switch(config)# no ip dns domain-list domain1.com

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ip dns domain-name

```
ip dns domain-name <DOMAIN-NAME> [ vrf <VRF-NAME> ]
no ip dns domain-name <DOMAIN-NAME> [ vrf <VRF-NAME> ]
```

Description

Configures a domain name that is appended to the DNS request. The domain can be either IPv4 or IPv6. By default, requests are forwarded on the default VRF. If a domain list is defined with the command `ip dns domain-list`, the domain name defined with this command is ignored.

The `no` form of this command removes the domain name.

Parameter	Description
<DOMAIN-NAME>	Specifies the domain name to append to DNS requests. Length: 1 to 256 characters.
vrf <VRF-NAME>	Specifies a VRF name. Default: default.

Examples

Setting the default domain name to `domain.com`:

```
switch(config)# ip dns domain-name domain.com
```

Removing the default domain name `domain.com`:

```
switch(config)# no ip dns domain-name domain.com
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ip dns host

```
ip dns host <HOST-NAME> <IP-ADDR> [ vrf <VRF-NAME> ]
no ip dns host <HOST-NAME> <IP-ADDR> [ vrf <VRF-NAME> ]
```

Description

Associates a static IP address with a hostname. The DNS client returns this IP address instead of querying a DNS server for an IP address for the hostname. Up to six hosts can be defined. If no VRF is defined, the default VRF is used.

The `no` form of this command removes a static IP address associated with a hostname.

Parameter	Description
host <HOST-NAME>	Specifies the name of a host. Length: 1 to 256 characters.
<IP-ADDR>	Specifies an IP address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255, or IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F.
vrf <VRF-NAME>	Specifies a VRF name. Default: default.

Examples

This example defines an IPv4 address of **3.3.3.3** for **host1**.

```
switch(config)# ip dns host host1 3.3.3.3
```

This example defines an IPv6 address of **b::5** for **host 1**.

```
switch(config)# ip dns host host1 b::5
```

This example defines removes the entry for **host 1** with address **b::5**.

```
switch(config)# no ip dns host host1 b::5
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

ip dns server address

```
ip dns server-address <IP-ADDR> [ vrf <VRF-NAME> ]  
no ip dns server-address <IP-ADDR> [ vrf <VRF-NAME> ]
```

Description

Configures the DNS name servers that the DNS client queries to resolve DNS queries. Up to six name servers can be defined. The DNS client queries the servers in the order that they are defined. If no VRF is defined, the default VRF is used.

The `no` form of this command removes a name server from the list.

Parameter	Description
<code><IP-ADDR></code>	Specifies an IP address in IPv4 format (<code>x.x.x.x</code>), where <code>x</code> is a decimal number from 0 to 255, or IPv6 format (<code>xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx</code>), where <code>x</code> is a hexadecimal number from 0 to F.
<code>vrf <VRF-NAME></code>	Specifies a VRF name. Default: default.

Examples

This example defines a name server at **1.1.1.1**.

```
switch(config)# ip dns server-address 1.1.1.1
```

This example defines a name server at **a::1**.

```
switch(config)# ip dns server-address a::1
```

This example removes a name server at **a::1**.

```
switch(config)# no ip dns server-address a::1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show ip dns

```
show ip dns [vrf <VRF-NAME>]
```

Description

Shows all DNS client configuration settings or the settings for a specific VRF.

Parameter	Description
<code>vrf <VRF-NAME></code>	Specifies the VRF for which to show information. If no VRF is defined, the default VRF is used.

Examples

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

The switch supports automatic discovery and configuration of other devices on the network.

Device profiles



Device profiles rely on role configurations. For information on role configurations, see the *Security Guide*.

Device profiles are used to dynamically assign port attributes based on the type of devices connected, without having to create a RADIUS infrastructure. You can map device profiles to device groups. A device group contains various match criteria, which can be obtained from multiple sources, such as LLDP, CDP, and local MAC match. Device profiles contain port attributes to be assigned to the port when a connected device matches a device group.

Device profiles are supported on different scenarios. It can be applied on interfaces that are configured with security (802.1X or MAC authentication), or applied based on L2 port (LLDP, CDP), or applied on standalone ports with the `block-until-profile-applied` command enabled. All the methods are mutually exclusive of each other. The `block-until-profile-applied` mode must be configured only when there is a standalone port where no security has been configured and when you want the port to be offline until at least one client is onboarded based on the match and ignore criteria that you configure. Local MAC match is supported when you configure `block-until-profile-applied` command or device profile with security.



Up to eight device profiles can be configured.


See the *Security Guide* for the following commands:

- The `port-access onboarding-method precedence` command—If you are configuring both security and device profile on the port, and you want to configure the order in which the methods will be executed.
- The `port-access fallback-role` command—If you want to configure a role that must be applied to devices when no other role exists or can be derived for that device.

If you configure a match criteria that matches across multiple device profiles, then the priority considered is LLDP, CDP, and then local MAC match. That is, LLDP precedes over CDP, which in turn precedes over local MAC match.

The following figure displays a simple configuration of device profile and AAA authentication with RADIUS server and Aruba ClearPass Policy Manager. Local MAC match feature is useful when you do not want to afford RADIUS infrastructure or when you want to use local authentication as a backup method in case the RADIUS server is unreachable.

Figure 2 Example of device profile setup along with RADIUS infrastructure

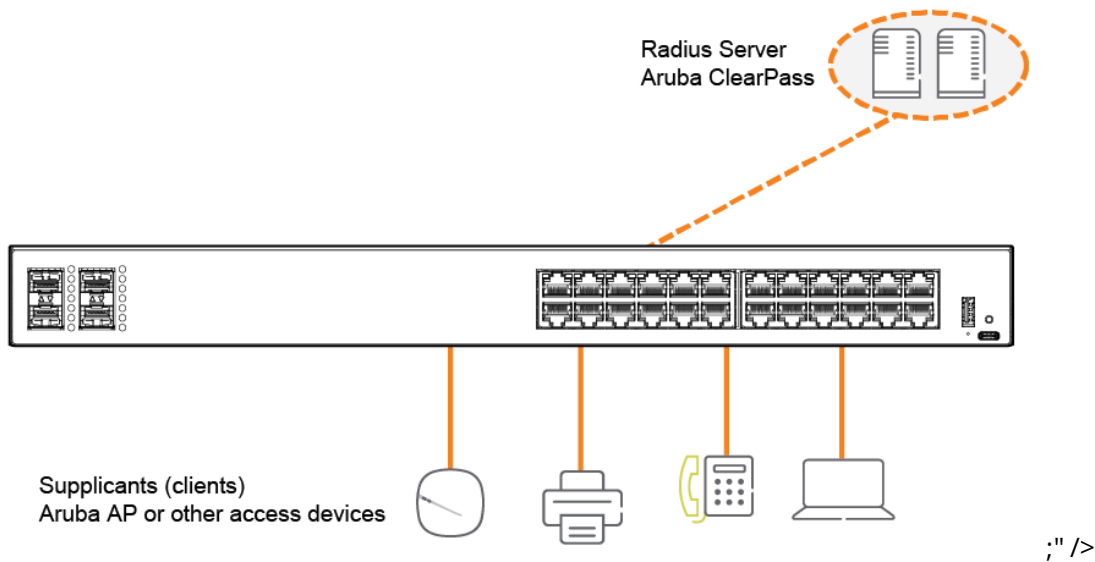

Configuring a device profile for LLDP

Procedure

1. Create an LLDP group with the command `port-access lldp-group`.
2. Define rules for adding devices to an LLDP group with the command `match`.
3. Define rules for ignoring devices so that they are not added to an LLDP group with the command `ignore`.
4. Create a device profile with the command `port-access device-profile`.
5. Add the LLDP group with the command `associate lldp-group`.
6. Add a role to a device profile with the command `associate role`. Make sure that the role is already created. For information on how to create a role, see port access role information in the *Security Guide*.
7. Enable the device profile with the command `enable`.

Configuring a device profile for CDP

1. Create a CDP group with the command `port-access cdp-group`.
2. Define rules for adding devices to a CDP group with the command `match`.
3. Define rules for ignoring devices so that they are not added to a CDP group with the command `ignore`.
4. Create a device profile with the command `port-access device-profile`.
5. Add a CDP group to a device profile with the command `associate cdp-group`.
6. Add a role to a device profile with the command `associate role`. Make sure that the role is already created. For information on how to create a role, see port access role information in the *Security Guide*.
7. Enable a device profile with the command `enable`.

Configuring a device profile for local MAC match

Procedure

1. Create a MAC group with the `mac-group` command.
2. Define rules for adding devices to a MAC group with the `match (for MAC groups)` command.
3. Define rules for ignoring devices so that they are not added to a MAC group with the `ignore (for MAC groups)` command.
4. Create a device profile with the `port-access device-profile` command.
5. Associate a MAC group with a device profile with the `associate mac-group` command.
6. Add a role to a device profile with the `associate role` command. Make sure that the role is already created. For information on how to create a role, see port access role information in the *Security Guide*.
7. Enable a device profile with the `enable` command.

Device profile commands

aaa authentication port-access allow-cdp-bpdu

```
aaa authentication port-access allow-cdp-bpdu
no aaa authentication port-access allow-cdp-bpdu
```

Description

Allows all packets related to the CDP (Cisco Discovery Protocol) BPDU (Bridge Protocol Data Unit) on a secure port.

The `no` form of this command blocks the CDP BPDU on a secure port. On a nonsecure port, the command has no effect.

Examples

Allowing a CDP BPDU on secure port **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access allow-cdp-bpdu
switch(config-if)# do show running-config
Current configuration:
!
!Version AOS-CX 10.0X.0000
led locator on
!
!
vlan 1
aaa authentication port-access mac-auth
enable
aaa authenticator port-access dot1x authenticator
enable
interface 1/1/1
no shutdown
vlan access 1
aaa authentication port-access allow-cdp-bpdu
aaa authentication port-access mac-auth
enable
aaa authenticator port-access dot1x authenticator
enable

switch(config-if)# do show port-access device-profile interface all
Port 1/1/1, Neighbor-Mac 00:0c:29:9e:d1:20
  Profile Name      : access_switches
  LLDP Group        :
  CDP Group         : aruba-ap_cdp
```

```
Role           : test_ap_role
Status          : In Progress
Failure Reason  :
```

Blocking LLDP packet on secure port **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# no aaa authentication port-access allow-cdp-bpdu
switch(config-if)# do show running-config
Current configuration:
!
!Version AOS-CX 10.0X.0000
led locator on
!
!
vlan 1
aaa authentication port-access mac-auth
    enable
interface 1/1/1
    no shutdown
    vlan access 1
    aaa authentication port-access mac-auth
        enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access allow-cdp-proxy-logoff

```
aaa authentication port-access allow-cdp-proxy-logoff
no aaa authentication port-access allow-cdp-proxy-logoff
```

Description

Allows a client to be logged off from the system via a special TLV in the CDP packet. By default, proxy logoff via CDP packet support is disabled. When `allow-cdp-proxy-logoff` is enabled, TLV received from CDP packets corresponding to logoff processing will be read and logoff is issued to the clients. This only works on client authentication enabled ports and `aaa authentication port-access allow-cdp-bpdu` must be enabled to process .

Examples

Allowing a client to be logged off from the system via a special TLV in the CDP packet:

```

switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access allow-cdp-proxy-logoff
switch(config-if)# show running-config interface 1/1/1
interface 1/1/1
    no shutdown

    vlan access 1
    aaa authentication port-access allow-cdp-bpdu
    aaa authentication port-access allow-cdp-proxy-logoff
    aaa authentication port-access allow client-limit 2
    aaa authentication port-access dot1x authenticator
        enable
    aaa authentication port-access mac-auth
        enable
exit

```

Command History

Release	Modification
10.09.1000	Command introduced.

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

aaa authentication port-access allow-lldp-bpdu

```

aaa authentication port-access allow-lldp-bpdu
no aaa authentication port-access allow-lldp-bpdu

```

Description

Allows all packets related to the LLDP BPDU (Bridge Protocol Data Unit) on a secure port.

The **no** form of this command blocks the LLDP BPDU on a secure port. On a nonsecure port, the command has no effect.

Examples

Allowing an LLDP BPDU on secure port **1/1/1**:

```

switch(config)# interface 1/1/1
switch(config-if)# aaa authentication port-access allow-lldp-bpdu
switch(config-if)# do show running-config
Current configuration:
!
!Version AOS-CX 10.0X.0000
led locator on
!
!
vlan 1
aaa authentication port-access mac-auth

```

```

    enable
interface 1/1/1
    no shutdown
    vlan access 1
    aaa authentication port-access allow-lldp-bpdu
    aaa authentication port-access mac-auth
    enable

switch(config-if)# do show port-access device-profile interface all
Port 1/1/1, Neighbor-Mac 00:0c:29:9e:d1:20
  Profile Name      : access_switches
  LLDP Group       : 2920-grp
  CDP Group        :
  Role             : local_2920_role
  Status           : Profile Applied
  Failure Reason    :

```

Blocking LLDP BPDU on secure port **1/1/1**:

```

switch(config)# interface 1/1/1
switch(config-if)# no aaa authentication port-access allow-lldp-bpdu
switch(config-if)# do show running-config
Current configuration:
!
!Version AOS-CX 10.0X.0000led locator on
!
!
vlan 1
aaa authentication port-access mac-auth
    enable
interface 1/1/1
    no shutdown
    vlan access 1
    aaa authentication port-access mac-auth
    enable

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if	Administrators or local user group members with execution rights for this command.

associate cdp-group

```

associate cdp-group <GROUP-NAME>
no associate cdp-group <GROUP-NAME>

```

Description

Associates a CDP (Cisco Discovery Protocol) group with a device profile. A maximum of two CDP groups can be associated with a device profile.

The **no** form of this command removes a CDP group from a device profile.

Parameter	Description
<i><GROUP-NAME></i>	Specifies the name of the CDP group to associate with this device profile. Range: 1 to 32 alphanumeric characters.

Examples

Associating the CDP group **my-cdp-group** with the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# associate cdp-group my-cdp-group
```

Removing the CDP group **my-cdp-group** from the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no associate cdp-group my-cdp-group
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

associate lldp-group

```
associate lldp-group <GROUP-NAME>
no associate lldp-group <GROUP-NAME>
```

Description

Associates an LLDP group with a device profile. A maximum of two LLDP groups can be associated with a device profile

The **no** form of this command removes an LLDP group from a device profile.

Parameter	Description
<i><GROUP-NAME></i>	Specifies the name of the LLDP group to associate with the device profile. Range: 1 to 32 alphanumeric characters.

Examples

Associating the LLDP group **my-lddp-group** with the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# associate lldp-group my-lddp-group
```

Removing the LLDP group **my-lddp-group** from the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no associate lldp-group my-lddp-group
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

associate mac-group

```
associate mac-group <GROUP-NAME>
no associate mac-group <GROUP-NAME>
```

Description

Associates a MAC group with a device profile. A maximum of two MAC groups can be associated with a device profile.

The **no** form of this command removes a MAC group from a device profile.

Parameter	Description
<GROUP-NAME>	Specifies the name of the MAC group to associate with this device profile. Range: 1 to 32 alphanumeric characters.

Examples

Associating the MAC group **mac01-group** with the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# associate mac-group mac01-group
```

Removing the MAC group **mac01-group** from the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no associate mac-group mac01-group
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

associate role

```
associate role <ROLE-NAME>
no associate role <ROLE-NAME>
```

Description

Associates a role with a device profile. Only one role can be associated with a device profile. For information on how to configure a role, see the port access role information in the *Security Guide*.

The `no` form of this command removes a role from a device profile.

Parameter	Description
<ROLE-NAME>	Specifies the name of the role to associate with the device profile. Range: 1 to 64 alphanumeric characters.

Examples

Associating the role **my-role** with the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# associate role my-role
```

Removing the role **my-role** from the device profile **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no associate role my-role
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

disable

disable
no disable

Description

Disables a device profile.

The `no` form of this command enables a device profile.

Examples

Disabling a device profile:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# disable
```

Enabling a device profile named profile01:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no disable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

enable

enable
no enable

Description

Enables a device profile.

The `no` form of this command disables a device profile.

Examples

Enabling a device profile:


```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# enable
```

Disabling a device profile named profile01:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)# no enable
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-device-profile	Administrators or local user group members with execution rights for this command.

ignore (for CDP groups)

```
ignore [seq <SEQ-NUM>] {platform <PLATFORM> | sw-version <SWVERSION> |  
    voice-vlan-query <VLAN-ID>}  
no ignore [seq <SEQ-ID>] {platform <PLATFORM> | sw-version <SWVERSION> |  
    voice-vlan-query <VLAN-ID>}
```

Description

Defines a rule to ignore devices for a CDP (Cisco Discovery Protocol) group. Up to 64 match/ignore rules can be defined for a group.

The **no** form of this command removes a rule for ignoring devices from a CDP group.

Parameter	Description
seq <SEQ-ID>	Specifies the ID of the rule to create or modify. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence.
platform <PLATFORM>	Specifies the hardware or model details of the neighbor. Range: 1 to 128 alphanumeric characters.
sw-version <SWVERSION>	Specifies the software version of the neighbor. Range: 1 to 128 alphanumeric characters.
voice-vlan-query <VLAN-ID>	Specifies the VLAN query value of the neighbor. Range: 1 to 65535.

Examples

Adding a rule to the CDP group **grp01** that ignores a device that transmits **PLATFORM01** in the platform TLV:

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# ignore platform PLATFORM01
```

Adding a rule to the CDP group **grp01** that ignores a device that transmits **SWVERSION** in software version TLV:

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# ignore sw-version SWVERSION
```

Removing the rule that matches the sequence number **25** from the CDP group named **grp01**.

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# no ignore seq 25
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-cdp-group	Administrators or local user group members with execution rights for this command.

ignore (for LLDP groups)

```
ignore [seq <SEQ-ID>] {sys-desc <SYS-DESC> | sysname <SYS-NAME> |
    vendor-oui <VENDOR-OUI> [type <KEY> [value <VALUE>]]}
no ignore [seq <SEQ-ID>] {sys-desc <SYS-DESC> | sysname <SYS-NAME> |
    vendor-oui <VENDOR-OUI> [type <KEY> [value <VALUE>]]}
```

Description

Defines a rule to ignore devices for an LLDP group. Up to 64 match/ignore rules can be defined for a group. The **no** form of this command removes a rule for ignoring devices from an LLDP group.

Parameter	Description
seq <SEQ-ID>	Specifies the ID of the rule to create or modify. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence.
sys-desc <SYS-DESC>	Specifies the LLDP system description type-length-value (TLV). Range: 1 to 256 alphanumeric characters.

Parameter	Description
sysname <SYS-NAME>	Specifies the LLDP system name TLV. Range: 1 to 64 alphanumeric characters.
vendor-oui <VENDOR-OUI>	Specifies the LLDP system vendor OUI TLV. Range: 1 to 6 alphanumeric characters.
type <KEY>	Specifies the vendor OUI subtype key. Optional.
value <VALUE>	Specifies the vendor OUI subtype value. Range: 1 to 256 alphanumeric characters.

Examples

Adding a rule to the LLDP group **grp01** that ignores a device that transmits **PLATFORM01** in the system description TLV:

```
switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# ignore sys-desc PLATFORM01
```

Removing the rule that matches the sequence number **25** from the LLDP group named **grp01**.

```
switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# no match seq 25
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-lldp-group	Administrators or local user group members with execution rights for this command.

ignore (for MAC groups)

```
[seq <SEQ-ID>] ignore {mac <MAC-ADDR> | mac-mask <MAC-MASK> | mac-oui <MAC-OUI>}
no [seq <SEQ-ID>] ignore {mac <MAC-ADDR> | mac-mask <MAC-MASK> | mac-oui <MAC-OUI>}
```

Description

Defines a rule to ignore devices for a MAC group based on the criteria of MAC address, MAC address mask, or MAC Organizational Unique Identifier (OUI). Up to 64 ignore rules can be defined for a group.

The **no** form of this command removes a rule for ignoring devices from a MAC group.

Parameter	Description
seq <SEQ-ID>	Specifies the entry sequence ID of the rule to create or modify a MAC group. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence. Range: 1 to 4294967295.
mac <MAC-ADDR>	Specifies the MAC address of the device to ignore.
mac-mask <MAC-MASK>	Specifies the MAC address mask to ignore devices in that range. Supported MAC address masks: /32 and /40.
mac-oui <MAC-OUI>	Specifies the MAC OUI to ignore devices in that range. Supports MAC OUI address of maximum length of 24 bits.

Usage

To achieve the required configuration of matches for devices, it is recommended to first ignore the devices that you do not want to add. Then match the criteria for the rest of the devices that you want to add to the MAC group.

For example, if you want to ignore a specific device but add all the other devices that belong to a MAC OUI, then you must first configure the ignore criteria with a lower sequence number. And then configure match criteria with a higher sequence number.

Examples

Adding a rule to the MAC group **grp01** to ignore a device based on MAC address, but match all other devices belonging to a MAC OUI:

```
switch(config)# mac-group grp01
switch(config-mac-group)# ignore mac 1a:2b:3c:4d:5e:6f
switch(config-mac-group)# match mac-oui 1a:2b:3c
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
!
!
ssh server vrf
!
!
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 ignore mac 1a:2b:3c:4d:5e:6f
    seq 20 match mac-oui 1a:2b:3c
```

```
...
```

Adding a rule to the MAC group **grp01** to ignore devices based on MAC address mask, but match all other devices belonging to a MAC OUI:

```
switch(config)# mac-group grp01
switch(config-mac-group)# ignore mac-mask 1a:2b:3c:4d/32
switch(config-mac-group)# match mac-oui 1a:2b:3c
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
!
!
ssh server vrf
!
!
!
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 ignore mac-mask 1a:2b:3c:4d/32
    seq 20 match mac-oui 1a:2b:3c
...
```

Adding a rule to the MAC group **grp01** that ignores a device based on complete MAC address:

```
switch(config)# mac-group grp01
switch(config-mac-group)# ignore mac 1a:2b:3c:4d:5e:6f
```

Adding a rule to the MAC group **grp02** that ignores devices based on MAC mask:

```
switch(config)# mac-group grp01
switch(config-mac-group)# ignore mac-mask 1a:2b:3c:4d:5e/40
switch(config-mac-group)# ignore mac-mask 18:e3:ab:73/32
```

Adding a rule to the MAC group **grp03** that ignores devices based on MAC OUI:

```
switch(config)# mac-group grp03
switch(config-mac-group)# ignore mac-oui 81:cd:93
```

Adding a rule to the MAC group **grp01** that ignores devices with a sequence number and based on MAC address:

```

switch(config)# mac-group grp01
switch(config-mac-group)# seq 10 ignore mac b2:c3:44:12:78:11
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 ignore mac b2:c3:44:12:78:11
...

```

Removing the rule from the MAC group **grp01** based on sequence number:

```

switch(config)# mac-group grp01
switch(config-mac-group)# no ignore seq 10
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
...

```

Adding a rule to the MAC group **grp01** that ignores devices with MAC entry sequence number and based on MAC OUI:

```

switch(config)# mac-group grp01
switch(config)# mac-group grp01
switch(config-mac-group)# seq 10 ignore mac b2:c3:44:12:78:11
switch(config-mac-group)# seq 20 ignore mac-oui 1a:2b:3c
switch(config-mac-group)# seq 30 ignore mac-mask 71:14:89:42/32
switch(config-mac-group)# exit
switch(config)#
switch(config)# ^Z

switch#
switch#
switch# show running-config
Current configuration:
!
!Version AOS-CX PL.10.06.0002

```

```

!export-password: default
!
!
!
!
ssh server vrf default
vlan 1
spanning-tree
mac-group grp01
    seq 10 ignore mac b2:c3:44:12:78:11
    seq 20 ignore mac-oui 1a:2b:3c
    seq 30 ignore mac-mask 71:14:89:42/32
interface 1/1/1
    no shutdown
    vlan access 1
interface 1/1/2
    no shutdown
    vlan access 1
interface 1/1/3
    no shutdown
    vlan access 1
interface 1/1/4
    no shutdown
    vlan access 1
interface 1/1/5
    no shutdown
    vlan access 1
interface 1/1/6
    no shutdown
    vlan access 1
interface 1/1/7
    no shutdown
    vlan access 1
interface 1/1/8
    no shutdown
    vlan access 1
interface 1/1/9
    no shutdown
    vlan access 1
interface 1/1/10
    no shutdown
    vlan access 1
interface 1/1/11
    no shutdown
    vlan access 1
interface 1/1/12
    no shutdown
    vlan access 1
interface 1/1/13
    no shutdown
    vlan access 1
interface 1/1/14
    no shutdown
    vlan access 1
interface 1/1/15
    no shutdown
    vlan access 1
interface 1/1/16
    no shutdown
    vlan access 1
interface vlan 1
    ip dhcp

```

```
!  
!  
!  
!  
!  
https-server vrf default
```

Removing the rule from the MAC group **grp01** based on sequence number and MAC OUI:

```
switch(config)# mac-group grp01  
switch(config-mac-group)# no seq 20 ignore mac-oui 1a:2b:3c  
switch(config-mac-group)# exit  
switch(config)# do show running-config  
Current configuration:  
!  
!Version AOS-CX Virtual.10.0X.0001  
!export-password: default  
led locator on  
!  
!  
vlan 1  
interface vlan 1  
    no shutdown  
    ip dhcp  
    mac-group grp01  
        seq 10 ignore mac b2:c3:44:12:78:11  
        seq 30 ignore mac-mask 71:14:89:f3/32  
  
...
```

Removing the rule that matches the sequence number **25** from the MAC group named **grp01**.

```
switch(config)# mac-group grp01  
switch(config-mac-group)# no ignore seq 25
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-mac-group	Administrators or local user group members with execution rights for this command.

mac-group

```
mac-group <MAC-GROUP-NAME>  
no mac-group <MAC-GROUP-NAME>
```

Description

Creates a MAC group or modifies an existing MAC group. A MAC group is used to classify connected devices based on the MAC address details, such as mask or OUI.

A maximum of 32 MAC groups can be configured on the switch. A maximum of 2 MAC groups can be associated with a device profile. Each group accepts 64 match or ignore commands.

The `no` form of this command removes a MAC group.

Parameter	Description
<code><MAC-GROUP-NAME></code>	Specifies the name of the MAC group to create or modify. The maximum number of characters supported is 32.

Examples

Creating a MAC group named `grp01`:

```
switch(config)# mac-group grp01
switch(config-mac-group)# exit
```

Removing a MAC group named `grp01`:

```
switch(config)# no mac-group grp01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

match (for CDP groups)

```
match [seq <SEQ-ID>] {platform <PLATFORM> | sw-version <SWVERSION> |
voice-vlan-query <VLAN-ID>}
no match [seq <SEQ-ID>] {platform <PLATFORM> | sw-version <SWVERSION> |
voice-vlan-query <VLAN-ID>}
```

Description

Defines a rule to match devices for a CDP group. A maximum of 32 CDP groups can be configured on the switch. Up to 64 match or ignore rules can be defined for each group.

The `no` form of this command removes a rule for adding devices to a CDP group.

Parameter	Description
seq <SEQ-ID>	Specifies the ID of the rule to create or modify. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence.
platform <PLATFORM>	Specifies the hardware or model details of the neighbor. Range: 1 to 128 alphanumeric characters.
sw-version <SWVERSION>	Specifies the software version of the neighbor. Range: 1 to 128 alphanumeric characters.
voice-vlan-query <VLAN-ID>	Specifies the VLAN query value of the neighbor. Range: 1 to 65535.

Examples

Adding rules to match a Cisco device with a specific software version on VLAN **512** to the CDP group **grp01**:

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# match platform CISCO
switch(config-cdp-group)# match sw-version 11.2(12)P
switch(config-cdp-group)# match voice-vlan-query 512
switch(config-cdp-group)# match seq 50 platform cisco sw-version 11.2(12)P voice-
vlan-query 512
switch(config-cdp-group)# exit
switch(config)# do show running-config

Current configuration:
!
!Version AOS-CX Virtual.10.0X.000
!export-password: default
led locator on
!
!
vlan 1
port-access cdp-group grp01
  seq 10 match platform CISCO
  seq 20 match sw-version 11.2(12)P
  seq 30 match voice-vlan-query 512
  seq 50 match platform cisco sw-version 11.2(12)P voice-vlan-query 512
```

Removing a rule that matches the sequence number **25** from the CDP group named **grp01**:

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# no match seq 25
```

Adding a rule that matches the value of vendor-OUI **000b86** to the CDP group named **grp01**:

```
switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# match vendor-oui 000b86
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-cdp-group	Administrators or local user group members with execution rights for this command.

match (for LLDP groups)

```
match [seq <SEQ-ID>] {sys-desc <SYS-DESC> | sysname <SYS-NAME> |
    vendor-oui <VENDOR-OUI> [type <KEY> [value <VALUE>]]}
no match [seq <SEQ-ID>] {sys-desc <SYS-DESC> | sysname <SYS-NAME> |
    vendor-oui <VENDOR-OUI> [type <KEY> [value <VALUE>]]}
```

Description

Defines a rule to match devices for an LLDP group. Up to 64 match/ignore rules can be defined for a group. The `no` form of this command removes a rule.

Parameter	Description
seq <SEQ-ID>	Specifies the ID of the rule to create or modify. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence.
sys-desc <SYS-DESC>	Specifies the LLDP system description type-length-value (TLV). Range: 1 to 256 alphanumeric characters.
sysname <SYS-NAME>	Specifies the LLDP system name TLV. Range: 1 to 64 alphanumeric characters.
vendor-oui <VENDOR-OUI>	Specifies the LLDP system vendor OUI TLV. Range: 1 to 6 alphanumeric characters.
type <KEY>	Specifies the vendor OUI subtype key.
value <VALUE>	Specifies the vendor OUI subtype value. Range: 1 to 256 alphanumeric characters.

Examples

Adding rules that match the LLDP system description **ArubaSwitch** and system name **Aruba** to the LLDP group named **grp01**:

```
switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# match sys-desc ArubaSwitch
switch(config-lldp-group)# match sysname Aruba
switch(config)# do show running-config
```

```

Current configuration:
!
!Version AOS-CX Virtual.10.0X.000
!export-password: default
led locator on
!
!
vlan 1
port-access lldp-group grp01
    seq 10 match sys-desc ArubaSwitch
    seq 20 match sysname Aruba

```

Removing a rule that matches the sequence number **25** from an LLDP group named **grp01**:

```

switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# no match seq 25

```

Adding a rule that matches the value of vendor-OUI **000b86** with type of **1** to the LLDP group named **grp01**:

```

switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# match vendor-oui 000b86 type 1

```

Adding a rule that matches the value of vendor-OUI **000c34** to the LLDP group named **grp01**:

```

switch(config)# port-access lldp-group grp01
switch(config-lldp-group)# match vendor-oui 000c34

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-lldp-group	Administrators or local user group members with execution rights for this command.

match (for MAC groups)

```

[seq <SEQ-ID>] match {mac <MAC-ADDR> | mac-mask <MAC-MASK> | mac-oui <MAC-OUI>}
no [seq <SEQ-ID>] match {mac <MAC-ADDR> | mac-mask <MAC-MASK> | mac-oui <MAC-OUI>}

```

Description

Defines a rule to match devices for a MAC group based on the criteria of MAC address, MAC address mask, or MAC Organizational Unique Identifier (OUI). Up to 64 match rules can be defined for a group.

You must not configure the following special MAC addresses:

- Null MAC—For example, 00:00:00:00:00:00 or 00:00:00:32
- Multicast MAC
- Broadcast MAC—For example, ff:ff:ff:ff:ff:ff
- System MAC

Although the switch accepts these addresses, it will not process these addresses for the local MAC match feature.

The `no` form of this command removes a rule for adding devices to a MAC group.

The number of clients that can onboard based on the match criteria is configured in the `aaa authentication port-access client-limit` command. For information about this command, see the *Security Guide* for your switch.

Parameter	Description
<code>seq <SEQ-ID></code>	Specifies the entry sequence ID of the rule to create or modify a MAC group. If no ID is specified when adding a rule, an ID is automatically assigned in increments of 10 in the order in which rules are added. When more than one rule matches the command entered, the rule with the lowest ID takes precedence. Range: 1 to 4294967295.
<code>mac <MAC-ADDR></code>	Specifies the MAC address of the device.
<code>mac-mask <MAC-MASK></code>	Specifies the MAC address mask to add devices in that range. Supported MAC address masks: /32 and /40.
<code>mac-oui <MAC-OUI></code>	Specifies the MAC OUI to add devices in that range. Supports MAC OUI address of maximum length of 24 bits.

Examples

Adding a device to the MAC group **grp01** based on complete MAC address:

```
switch(config)# mac-group grp01
switch(config-mac-group)# match mac 1a:2b:3c:4d:5e:6f
switch(config-mac-group)# exit
```

Adding devices to the MAC group **grp02** based on MAC mask:

```
switch(config)# mac-group grp01
switch(config-mac-group)# match mac-mask 1a:2b:3c:4d:5e/40
switch(config-mac-group)# match mac-mask 18:e3:ab:73/32
switch(config-mac-group)# exit
```

Adding devices to the MAC group **grp03** based on MAC OUI:

```
switch(config)# mac-group grp03
switch(config-mac-group)# match mac-oui 81:cd:93
switch(config-mac-group)# exit
```

Adding devices to the MAC group **grp01** with MAC entry sequence number and based on MAC address:

```
switch(config)# mac-group grp01
switch(config-mac-group)# seq 10 match mac b2:c3:44:12:78:11
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 match mac b2:c3:44:12:78:11
...
```

Removing devices from the MAC group **grp01** based on sequence number:

```
switch(config)# mac-group grp01
switch(config-mac-group)# no match seq 10
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
...
```

Adding devices to the MAC group **grp01** with MAC entry sequence number and based on MAC address, MAC address mask, and MAC OUI:

```
switch(config)# mac-group grp01
switch(config-mac-group)# seq 10 match mac b2:c3:44:12:78:11
switch(config-mac-group)# seq 20 match mac-oui 1a:2b:3c
switch(config-mac-group)# seq 30 match mac-mask 71:14:89:f3/32
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
```

```

vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 match mac b2:c3:44:12:78:11
    seq 20 match mac-oui 1a:2b:3c
    seq 30 match mac-mask 71:14:89:f3/32
...

```

Removing devices from the MAC group **grp01** based on MAC OUI:

```

switch(config)# mac-group grp01
switch(config-mac-group)# no seq 20 match mac-oui 1a:2b:3c
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp01
    seq 10 match mac b2:c3:44:12:78:11
    seq 30 match mac-mask 71:14:89:f3/32
...

```

Adding devices to the MAC group **grp03** with MAC entry sequence number and based on MAC address mask:

```

switch(config)# mac-group grp03
switch(config-mac-group)# seq 10 match mac-mask 10:14:a3:b7:55/40
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
mac-group grp03
    seq 10 match mac-mask 10:14:a3:b7:55/40
...

```

Removing devices from the MAC group **grp03** based on MAC address mask:

```

switch(config)# mac-group grp03
switch(config-mac-group)# no seq 10 match mac-mask 10:14:a3:b7:55/40
switch(config-mac-group)# exit
switch(config)# do show running-config
Current configuration:
!
!Version AOS-CX Virtual.10.0X.0001
!export-password: default
led locator on
!
!
vlan 1
interface vlan 1
    no shutdown
    ip dhcp
    mac-group grp03
...

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-mac-group	Administrators or local user group members with execution rights for this command.

port-access cdp-group

```

port-access cdp-group <CDP-GROUP-NAME>
no port-access cdp-group <CDP-GROUP-NAME>

```

Description

Creates a CDP (Cisco Discovery Protocol) group or modifies an existing CDP group. A CDP Group is used to classify connected devices based on the CDP packet details advertised by the device. A maximum of 32 CDP groups can be configured on the switch. Each group accepts 64 match/ignore commands.

The `no` form of this command removes a CDP group.

Parameter	Description
<CDP-GROUP-NAME>	Specifies the name of the CDP group to create or modify. The maximum number of characters supported is 32. Required.

Examples

Creating a CDP group named grp01:


```

switch(config)# port-access cdp-group grp01
switch(config-cdp-group)# match platform CISCO
switch(config-cdp-group)# match sw-version 11.2(12)P
switch(config-cdp-group)# match voice-vlan-query 512
switch(config-cdp-group)# seq 50 match platform cisco sw-version 11.2(12)P voice-
vlan-query 512
switch(config-cdp-group)# exit
switch(config)# do show running-config

```

Current configuration:

```

!
!Version AOS-CX Virtual.10.0X.000
!export-password: default
led locator on
!
!
vlan 1
port-access cdp-group grp01
    seq 10 match platform CISCO
    seq 20 match sw-version 11.2(12)P
    seq 30 match voice-vlan-query 512
    seq 50 match platform cisco sw-version 11.2(12)P voice-vlan-query 512

```

Removing a CDP group named grp01:

```

switch(config)# no port-access cdp-group grp01

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

port-access device-profile

```

port-access device-profile <DEVICE-PROFILE-NAME>
no port-access device-profile <DEVICE-PROFILE-NAME>

```

Description

Creates a new device profile and switches to the `config-device-profile` context. A maximum of 32 device profiles can be created.

The `no` form of this command removes a device profile.

Parameter	Description
<DEVICE-PROFILE-NAME>	Specifies the name of a device profile. Range: 1 to 32 alphanumeric characters.

Examples

Creating a device profile named **profile01**:

```
switch(config)# port-access device-profile profile01
switch(config-device-profile)#
```

Removing a device profile named **profile01**:

```
switch(config)# no port-access device-profile profile01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

port-access device-profile mode block-until-profile-applied



You must configure this mode in device profile only on standalone ports where there is no security configured and when you not want the port to be offline until one client is onboarded.

```
port-access device-profile mode block-until-profile-applied
no port-access device-profile mode block-until-profile-applied
```

Description

Configures the switch to block the port until a profile match occurs for a device. This configuration is required when no security feature is enabled on the port.

You must enable this mode or security on the port for local MAC match feature to operate. You must not enable both features on the same port at the same time.



You must not combine any other AAA configurations with the block-until-profile-applied mode.

The **no** form of this command removes a rule for adding devices to a MAC group.

Example

Configuring block-until-profile applied mode on port 1/1/1:

```
switch(config)# interface 1/1/1
switch(config-if)# port-access device-profile
switch(config-if-deviceprofile)# mode block-until-profile-applied
switch(config-if-deviceprofile)# end
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config-if config-if-deviceprofile	Administrators or local user group members with execution rights for this command.

port-access lldp-group

```
port-access lldp-group <LLDP-GROUP-NAME>  
no port-access lldp-group <LLDP-GROUP-NAME>
```

Description

Creates an LLDP group or modifies an existing LLDP group. An LLDP group is used to classify connected devices based on the LLDP type-length-values (TLVs) advertised by the device. A maximum of 32 LLDP groups can be configured on the switch. Each group accepts 64 match/ignore commands.

The `no` form of this command removes an LLDP group.

Parameter	Description
<LLDP-GROUP-NAME>	Specifies the name of the LLDP group to create or modify. The maximum number of characters supported is 32. Required.

Examples

Creating an LLDP group named grp01:

```
switch(config)# port-access lldp-group grp01  
switch(config-lldp-group)#
```

Removing an LLDP group named grp01:

```
switch(config)# no port-access lldp-group grp01
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	config	Administrators or local user group members with execution rights for this command.

show port-access device-profile

```
show port-access device-profile [[interface {all | <INTERFACE-ID>}
                                [client-status <MAC-ADDR>]] | name <DEVICE-PROFILE-NAME>]
```

Description

Shows the client status for a specific MAC address or profile name.

Parameter	Description
interface {all <INTERFACE-ID>}	Select all for all interfaces or specify the name of an interface in the format: member/slot/port.
client-status <MAC-ADDR>	Specifies a MAC address (xx:xx:xx:xx:xx:xx), where x is a hexadecimal number from 0 to F.
name <DEVICE-PROFILE-NAME>	Specifies the name of the device profile.

Examples

Showing the applied state of the device profiles:

```
switch# show port-access device-profile

  Profile Name      : accesspoints
  LLDP Groups       : 2920-grp
  CDP Groups        :
  MAC Groups        : 2920-mac-grp1,2920-iot-grp2
  Role              : local_role_1
  State             : Enabled

  Profile Name      : access_switches
  LLDP Groups       : 2920-grp
  CDP Groups        :
  MAC Groups        :
  Role              : local_2920_role
  State             : Enabled

  Profile Name      : iot_devices
  LLDP Groups       :
  CDP Groups        :
  MAC Groups        : iot_camera-grp1,iot_sensors-grp1
  Role              : local_2920_role
  State             : Enabled

  Profile Name      : lobbyaps
  LLDP Groups       :
  CDP Groups        : lobby_ap_cdp_grp
  MAC Groups        :
  Role              : test_ap_role
  State             : Disabled
```

Showing the applied state of the device profile on interface 1/1/3:

```
switch# show port-access device-profile interface 1/1/3 client-status
00:0c:29:9e:d1:20

Port 1/1/3, Neighbor-Mac 00:0c:29:9e:d1:20
  Profile Name      : lobbyaps
  LLDP Group        :
  CDP Group         : aruba-ap_cdp
  MAC Group         :
  Role              : test_ap_role
  Status            : Failed
  Failure Reason    : Failed to apply MAC based VLAN
```

Showing the applied state of a specific device profile:

```
switch# show port-access device-profile name lldp-group

  Profile Name      : lldp-group
  LLDP Groups       :
  CDP Groups        :
  MAC Groups        : pc-behind-phone, lldp
  Role              : auth_role
  State             : Enabled
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
4100i 6000 6100	Manager (#)	Administrators or local user group members with execution rights for this command.

LLDP

The IEEE 802.1AB Link Layer Discovery Protocol (LLDP) provides a standards-based method for network devices to discover each other and exchange information about their capabilities. An LLDP device advertises itself to adjacent (neighbor) devices by transmitting LLDP data packets on all interfaces on which outbound LLDP is enabled, and reading LLDP advertisements from neighbor devices on ports on which inbound LLDP is enabled. Inbound packets from neighbor devices are stored in a special LLDP MIB (management information base). This information can then be queried by other devices through SNMP.

LLDP information is used by network management tools to create accurate physical network topologies by determining which devices are neighbors and through which interfaces they connect. LLDP operates at layer 2 and requires an LLDP agent to be active on each interface that sends and receives LLDP advertisements. LLDP advertisements can contain a variable number of TLV (type, length, value) information elements. Each TLV describes a single attribute of a device such as: system capabilities, management IP address, device ID, port ID.

Packet boundaries

When multiple LLDP devices are directly connected, an outbound LLDP packet travels only to the next LLDP device. An LLDP-capable device does not forward LLDP packets to any other devices, regardless of whether they are LLDP-enabled.

An intervening hub or repeater forwards the LLDP packets it receives in the same manner as any other multicast packets it receives. Therefore, two LLDP switches joined by a hub or repeater handle LLDP traffic in the same way that they would if directly connected.

Any intervening 802.1D device or Layer-3 device that is either LLDP-unaware or has disabled LLDP operation drops the packet.

LLDP-MED

LLDP-MED (ANSI/TIA-1057/D6) extends the LLDP (IEEE 802.1AB) industry standard to support advanced features on the network edge for Voice Over IP (VoIP) endpoint devices with specialized capabilities and LLDP-MED standards-based functionality. LLDP-MED in the switches uses the standard LLDP commands described earlier in this section, with some extensions, and also introduces new commands unique to LLDP-MED operation. The show commands described elsewhere in this section are applicable to both LLDP and LLDP-MED operation. LLDP-MED enables:

- Configure Voice VLAN and advertise it to connected MED endpoint devices.
- Power over Ethernet (PoE) status and troubleshooting support via SNMP.

LLDP agent

When you enable LLDP on the switch, it is automatically enabled on all data plane interfaces. You can customize this behavior by manually enabling/disabling support on each interface.

Supported standards

The LLDP agent supports the following standards: IEEE 802.1AB-2005, Station, and Media Access Control Connectivity Discovery.

Supported interfaces

LLDP is supported on interfaces mapped to a physical port. It is not supported on logical interfaces, such as loopback, tunnels, and SVIs.

Operating modes

When LLDP is enabled, the switch periodically transmits an LLDP advertisement (packet) out each active port enabled for outbound LLDP transmissions and receives LLDP advertisements on each active port enabled to receive LLDP traffic.

The LLDP agent can operate in one of the following modes:

- Transmit and receive (TxRx): This is the default setting on all ports. It enables a given port to both transmit and receive LLDP packets and to store the data from received (inbound) LLDP packets in the switch's MIB.
- Transmit only (Tx): Enables a port to transmit LLDP packets that can be read by LLDP neighbors. However, the port drops inbound LLDP packets from LLDP neighbors without reading them. This prevents the switch from learning about LLDP neighbors on that port.
- Receive only (Rx): Enables a port to receive and read LLDP packets from LLDP neighbors and to store the packet data in the switch's MIB. However, the port does not transmit outbound LLDP packets. This prevents LLDP neighbors from learning about the switch through that port.

- **Disabled:** Disables LLDP packet transmissions and reception on a port. In this state, the switch does not use the port for either learning about LLDP neighbors or informing LLDP neighbors of its presence.

An LLDP agent operating in TxRx mode or Tx mode sends LLDP frames to its directly connected devices both periodically and when the local configuration changes.

Sending LLDP frames

Each time the LLDP operating mode of an LLDP agent changes, its LLDP protocol state machine reinitializes. A configurable reinitialization delay prevents frequent initializations caused by frequent changes to the operating mode. If you configure the reinitialization delay, an LLDP agent must wait the specified amount of time to initialize LLDP after the LLDP operating mode changes.

Receiving LLDP frames

An LLDP agent operating in TxRx mode or Rx mode confirms the validity of TLVs carried in every received LLDP frame. If the TLVs are valid, the LLDP agent saves the information and starts an aging timer. The initial value of the aging timer is equal to the TTL value in the Time To Live TLV carried in the LLDP frame. When the LLDP agent receives a new LLDP frame, the aging timer restarts. When the aging timer decreases to zero, all saved information ages out.

TLV support

By default, the agent sends and receives the following mandatory TLVs on each interface:

- Port ID
- Chassis ID
- TTL

By default, the following ANSI/TIA-1057 TLVs for LLDP Media Endpoint Discovery (MED) are enabled on an agent. Sending them depends on the configuration and reception of any MED TLVs:

- MAC/PHY status. Includes the bit rate and auto negotiation status of the link.
- Power Via MDI: Includes Power Over Ethernet related information for supported interfaces.
- Port description
- System name
- System description
- Management address
- System capabilities
- Port VLAN ID

By default, the agent sends and receives the following ANSI/TIA-1057 TLVs for LLDP Media Endpoint Discovery (MED):

- Capabilities: Indicates MED TLV capability.
- Power Via MDI: Includes Power Over Ethernet related information.
- Network Policy: Includes the VLAN configuration for voice application.
- Location: Location identification information.
- Extended Power Via MDI: Power Over Ethernet related information

TLV advertisements

The LLDP agent transmits the following:

- Chassis-ID: Base MAC address of the switch.
- Port-ID: Port number of the physical port.
- Time-to-Live (TTL): Length of time an LLDP neighbor retains advertised data before discarding it.
- System capabilities: Identifies the primary switch capabilities (bridge, router). Identifies the primary switch functions that are enabled, such as routing.
- System description: Includes switch model name and running software version, and ROM version.
- System name: Name assigned to the switch.
- Management address: Default address selection method unless an optional address is configured.
- Port description: Physical port identifier.
- Port VLAN ID: On an L2 port, contains access or native VLAN ID. Trunk allowed VLANs information are not advertised as part of the Port VLAN ID TLV.

LLDP MED support

LLDP-MED interoperates with directly connected IP telephony (endpoint) clients and provides the following features:

- Advertisement of the voice VLAN configured on the interface which is used by connected IP telephony (endpoint) clients.
- Advertisement of the configured location on the switch that can be used by the connected endpoint.
- Support for the fast-start capability



LLDP-MED is intended for use with VoIP endpoints and is not designed to support links between network infrastructure devices (such as switch-to-switch or switch-to-router links).

Configuring the LLDP agent

Procedure

1. By default, the LLDP agent is enabled on all active interfaces. If LLDP was disabled, enable it with the command `lldp`.
2. By default, the LLDP agent transmits and receive on all interfaces. To customize LLDP behavior on a specific interface, use the commands `lldp transmit` and `lldp receive`.
3. By default, the LLDP agent sets the management address in all TLVs in the following order:
 - a. LLDP management IP address.
 - b. SVI.
 - c. Base MAC.
4. By default, all supported TLVs are sent and received. To customize the list, use the command `lldp select-tlv`.
5. By default, support for the LLDP-MED TLV is enabled. To customize settings, use the commands `lldp med` and `lldp med-location`.
6. If required, adjust LLDP timer, holdtime, reinitialization delay, and transmit delay from their default values with the commands `lldp timer`, `lldp holdtime`, `lldp reinit`, and `lldp txdelay`.

Example

This example creates the following configuration:

- Enables LLDP support.
- Disables LLDP transmission on interface **1/1/1**.

```
switch(config)# lldp
switch(config)# interface 1/1/1
switch(config-copp)# no lldp transmit
```

LLDP commands

clear lldp neighbors

```
clear lldp neighbors
```

Description

Clears all LLDP neighbor details.

Examples

Clearing all LLDP neighbor details:

```
switch# clear lldp neighbors
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

clear lldp statistics

```
clear lldp statistics
```

Description

Clears all LLDP neighbor statistics.

Examples

Clearing all LLDP neighbor statistics:

```
switch# clear lldp statistics
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

lldp

```
lldp
no lldp
```

Description

Enables LLDP support globally on all active interfaces. By default, LLDP is enabled.

The `no` form of this command disables LLDP support globally on all active interfaces. It does not remove any LLDP configuration settings.

Examples

Enabling LLDP:

```
switch(config)# lldp
```

Disabling LLDP:

```
switch(config)# no lldp
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp dot3

```
lldp dot3 {poe | macphy}
no lldp dot3 {poe | macphy}
```

Description

Sets the 802.3 TLVs to be advertised. By default, advertisement of both POE and MAC/PHY TLVs is enabled.

The `no` form of this command disables advertisement of 802.3 TLVs.

Parameter	Description
<code>poe</code>	Specifies advertisement of power over Ethernet data link classification.
<code>macphy</code>	Specifies advertisement of media access control and physical layer information.

Examples

Enabling advertisement of the POE TLV:

```
switch(config-if) # lldp dot3 poe
```

Disabling advertisement of the POE TLV:

```
switch(config-if) # no lldp dot3 poe
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config-if</code>	Administrators or local user group members with execution rights for this command.

lldp holdtime

```
lldp holdtime <TIME>  
no lldp holdtime
```

Description

Sets the holdtime that is used to calculate the LLDP Time-to-Live value. Time-to-Live defines the length of time that neighbors consider LLDP information sent by this agent as valid. When Time-to-Live expires, the information is deleted by the neighbor. Time-to-live is calculated by multiplying holdtime by the value of `lldp timer`.

The `no` form of this command sets the holdtime to its default value of 4.

Parameter	Description
<code><TIME></code>	Specifies the holdtime in seconds. Range: 2 to 10. Default: 4.

Examples

Setting the holdtime to 8 seconds:

```
switch(config)# lldp holdtime 8
```

Setting the holdtime to the default value of 4 seconds:

```
switch(config)# no lldp holdtime
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp management-ipv4-address

```
lldp management-ipv4-address <IPV4-ADDR>  
no lldp management-ipv4-address
```

Description

Defines the IPv4 management address of the switch which is sent in the management address TLV. One IPv4 and one IPv6 management address can be configured.

If you do not define an LLDP management address, then LLDP uses one of the following (in order):

- IP address of SVI [interface VLAN <vid>]
- Base MAC address of the switch

The `no` form of this command removes the IPv4 management address of the switch.

Parameter	Description
<IPV4-ADDR>	Specifies the management address of the switch as an IPv4 format (x.x.x.x), where x is a decimal value from 0 to 255.

Examples

Setting the management address to **10.10.10.2**:

```
switch(config)# lldp management-ipv4-address 10.10.10.2
```

Removing the management address:

```
switch(config)# no lldp management-ipv4-address
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp management-ipv6-address

```
lldp management-ipv6-address <IPV6-ADDR>
no lldp management-ipv6-address
```

Description

Defines the IPv6 management address of the switch. The management address is encapsulated in the management address TLV.

If you do not define an LLDP management address, then LLDP uses one of the following (in order):

- IP address of SVI [interface VLAN <vid>]
- Base MAC address of the switch

The `no` form of this command removes the IPv6 management address of the switch.

Parameter	Description
<IPV6-ADDR>	Specifies an IP address in IPv6 format (xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx:xxxx), where x is a hexadecimal number from 0 to F.

Examples

Setting the management address to 2001:db8:85a3::8a2e:370:7334:

```
switch(config)# lldp management-ipv6-address 2001:0db8:85a3::8a2e:0370:7334
```

Removing the management address:

```
switch(config)# no lldp management-ipv6-address
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp med

```
lldp med [poe [priority-override] | capability | network-policy]
no med [poe [priority-override] | capability | network-policy]
```

Description

Configures support for the LLDP-MED TLV. LLDP-MED (media endpoint devices) is an extension to LLDP developed by TIA to support interoperability between VoIP endpoint devices and other networking end-devices. The switch only sends the LLDP MED TLV after receiving a MED TLV from and connected endpoint device.

The `no` form of this command disables support for the LLDP MED TLV.

Parameter	Description
<code>poe [priority-override]</code>	Specifies advertisement of power over Ethernet data link classification. The <code>priority-override</code> option overrides user-configured port priority for Power over Ethernet. When both <code>lldp dot3 poe</code> and <code>lldp med poe</code> are enabled, the <code>lldp dot3 poe3</code> setting takes precedence. Default: enabled.
<code>capability</code>	Specifies advertisement of supported LLDP MED TLVs. The capability TLV is always sent with other MED TLVs, therefore it cannot be disabled when other MED TLVs are enabled. Default: enabled.
<code>network-policy</code>	Network policy discovery lets endpoints and network devices advertise their VLAN IDs, and IEEE 802.1p (PCP and DSCP) values for voice applications. This TLV is only sent when a voice VLAN policy is present. Default: enabled.

Examples

Enabling advertisement of the network policy TLV:

```
switch(config-if)# lldp med network-policy
```

Disabling advertisement of the network policy TLV:

```
switch(config-if)# no lldp med network-policy
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

lldp med-location

```
lldp med-location {civic-addr | elin-addr }
no med-location {civic-addr | elin-addr }
```

Description

Configures support for the LLDP-MED TLV. Supports only civic address and emergency location information number (ELIN). Coordinate-based location is not supported.

The **no** form of this command disables support for the LLDP MED TLV.

Parameter	Description
civic-addr	Configures the LLDP MED civic location TLV.
elin-addr	Configures support for the LLDP MED emergency location TLV.

Examples

Enabling support for the LLDP MED emergency location TLV:

```
switch(config-if)# lldp med-location elin-addr gher
```

Disabling support for the LLDP MED emergency location TLV:

```
switch(config-if)# no lldp med-location elin-addr gher
```

Enabling support for the LLDP MED civic address TLV:

```
switch(config-if)# lldp med-location civic-addr US 1 4 ret 6 tyu 7 tiyuo
```

Disabling support for the LLDP MED civic address TLV:

```
switch(config-if)# no lldp med-location civic-addr US 1 4 ret 6 tyu 7 tiyuo
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

lldp receive

lldp receive
no lldp receive

Description

Enables reception of LLDP information on an interface. By default, LLDP reception is enabled on all active interfaces.

The **no** form of this command disables reception of LLDP information on an interface.

Examples

Enabling LLDP reception on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# lldp receive
```

Disabling LLDP reception on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# no lldp receive
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

lldp reinit

lldp reinit <TIME>
no lldp reinit

Description

Sets the amount of time (in seconds) to wait before performing LLDP initialization on an interface.

The **no** form of this command sets the reinitialization time to its default value of 2 seconds.

Parameter	Description
<code><TIME></code>	Specifies the reinitialization time in seconds. Range: 1 to 10. Default: 2 seconds.

Examples

Setting the reinitialization time to 5 seconds:

```
switch(config)# lldp reinit 5
```

Setting the reinitialization time to the default value of 2 seconds:

```
switch(config)# no lldp reinit
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp select-tlv

```
lldp select-tlv <TLV-NAME>
no lldp select-tlv <TLV-NAME>
```

Description

Selects a TLV that the LLDP agent will send and receive. By default, all supported TLVs are sent and received. The `no` form of this command stops the LLDP agent from sending and receiving a specific TLV.

Parameter	Description
<code>select-tlv <TLV-NAME></code>	Specifies the TLV name to send. The following TLV names are supported: ■ <code>management-address</code>: Selected as follows: 1. IPv4 or IPV6 management address. 2. If layer 2, the IP address of the SVI. 3. Base MAC address of the switch. ■ <code>port-description</code>: A description of the port. ■ <code>port-vlan-id</code>: VLAN ID assigned to the port. ■ <code>system-capabilities</code>: Identifies the primary switch functions that are enabled, such as routing.

Parameter	Description
	■ <code>system-description</code>: Description of the system, comprised of the following information: hardware serial number, hardware revision number, and firmware version. ■ <code>system-name</code>: Host name assigned to the switch.

Examples

Stopping the LLDP agent from sending the **port-description** TLV:

```
switch(config)# no lldp select-tlv port-description
```

Enabling the LLDP agent to send the **port-description** TLV:

```
switch(config)# lldp select-tlv port-description
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp timer

```
lldp timer <TIME>
no lldp timer
```

Description

Sets the interval (in seconds) at which local LLDP information is updated and TLVs are sent to neighboring network devices by the LLDP agent. The minimum setting for this timer must be four times the value of `lldp txdelay`.

For example, this is a valid configuration:

- `lldp timer = 16`
- `lldp txdelay = 4`

And, this is an invalid configuration:

- `lldp timer = 5`
- `lldp txdelay = 2`

When copying a saved configuration to the running configuration, the value for `lldp timer` is applied before the value of `lldp txdelay`. This can result in a configuration error if the saved configuration has a value of `lldp timer` that is not four times the value of `lldp txdelay` in the running configuration.

For example, if the saved configuration has the settings:

- `lldp timer = 16`
- `lldp txdelay = 4`



And the running configuration has the settings:

- `lldp timer = 30`
- `lldp txdelay = 7`

Then you will see an error indicating that certain configuration settings could not be applied, and you will have to manually adjust the value of `lldp txdelay` in the running configuration.

The `no` form of this command sets the update interval to its default value of 30 seconds.

Parameter	Description
<code><TIME></code>	Specifies the update interval (in seconds). Range: 5 to 32768. Default: 30.

Examples

Setting the update interval to 7 seconds:

```
switch(config)# lldp timer 7
```

Setting the update interval to the default value of 30 seconds:

```
switch(config)# no lldp timer
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

lldp transmit

```
lldp transmit  
no lldp transmit
```

Description

Enables transmission of LLDP information on specific interface. By default, LLDP transmission is enabled on all active interfaces.

The `no` form of this command disables transmission of LLDP information on an interface.

Examples

Enabling LLDP transmission on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# lldp transmit
```

Disabling LLDP transmission on interface **1/1/1**:

```
switch(config)# interface 1/1/1
switch(config-if)# no lldp transmit
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config-if	Administrators or local user group members with execution rights for this command.

lldp txdelay

```
lldp txdelay <TIME>
no lldp txdelay
```

Description

Sets the amount of time (in seconds) to wait before sending LLDP information from any interface. The maximum value for `txdelay` is 25% of the value of `lldp tx timer`.

The `no` form of this command sets the delay time to its default value of 2 seconds.

Parameter	Description
<TIME>	Specifies the delay time in seconds. Range: 0 to 10. Default: 2.

Examples

Setting the delay time to 8 seconds:

```
switch(config)# lldp txdelay 8
```

Setting the delay time to the default value of 2 seconds:

```
switch(config)# no lldp txdelay
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

lldp trap enable

```
lldp trap enable  
no lldp trap enable
```

Description

Enables sending SNMP traps for LLDP related events from a particular interface. LLDP trap generation is enabled by default on all the interfaces and has to be disabled for interfaces on which traps are not required to be generated.

The `no` form of this command disables the LLDP trap generation.



LLDP trap generation is disabled by default at the global level and must be enabled before any LLDP traps are sent.

Examples

Enabling LLDP trap generation on global level:

```
switch(config)# lldp trap enable
```

Enabling LLDP trap generation on interface level:

```
switch(config-if)# lldp trap enable
```

Disabling LLDP trap generation on global level:

```
switch(config)# no lldp trap enable
```

Disabling LLDP trap generation on interface level:

```
switch(config-if)# no lldp trap enable
```

Displaying LLDP global configuration:

```
switch# show lldp configuration
```

LLDP Global Configuration

=====

```
LLDP Enabled           : No
LLDP Transmit Interval : 30
LLDP Hold Time Multiplier : 4
LLDP Transmit Delay Interval : 2
LLDP Reinit Timer Interval : 2
LLDP Trap Enabled      : No
```

TLVs Advertised

=====

```
Management Address
Port Description
Port VLAN-ID
System Description
System Name
```

LLDP Port Configuration

=====

PORT	TX-ENABLED	RX-ENABLED	INTF-TRAP-ENABLED
1/1/1	Yes	Yes	Yes
1/1/2	Yes	Yes	Yes
1/1/3	Yes	Yes	Yes
1/1/4	Yes	Yes	Yes
1/1/5	Yes	Yes	Yes
1/1/6	Yes	Yes	Yes
.....			
.....			
mgmt	Yes	Yes	Yes

Displaying LLDP Configuration for the interface:

```
switch# show lldp configuration 1/1/1
```

LLDP Global Configuration

=====

```
LLDP Enabled           : Yes
LLDP Transmit Interval : 30
LLDP Hold Time Multiplier : 4
LLDP Transmit Delay Interval : 2
LLDP Reinit Timer Interval : 2
LLDP Trap Enabled      : No
```

LLDP Port Configuration

=====

PORT	TX-ENABLED	RX-ENABLED	INTF-TRAP-ENABLED
1/1/1	Yes	Yes	Yes

Displaying LLDP Configuration for the management interface:

```
switch# show lldp configuration mgmt
```

LLDP Global Configuration

=====

```
LLDP Enabled           : Yes
LLDP Transmit Interval : 30
LLDP Hold Time Multiplier : 4
LLDP Transmit Delay Interval : 2
LLDP Reinit Timer Interval : 2
LLDP Trap Enabled      : Yes
```

LLDP Port Configuration

=====

PORT	TX-ENABLED	RX-ENABLED	INTF-TRAP-ENABLED
-----	-----	-----	-----
mgmt	Yes	Yes	Yes

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config and config-if	Administrators or local user group members with execution rights for this command.

show lldp configuration

show lldp configuration [<INTERFACE-ID>]

Description

Shows LLDP configuration settings for all interfaces or a specific interface.

Parameter	Description
<INTERFACE-ID>	Specifies an interface. Format: member/slot/port.

Example

Showing configuration settings for all interfaces:

This example shows configuration settings for interface **1/1/1**.

```
switch# show lldp configuration 1/1/1

LLDP Global Configuration
=====
LLDP Enabled           : Yes
LLDP Transmit Interval : 30
LLDP Hold Time Multiplier : 4
LLDP Transmit Delay Interval : 2
```

```
LLDP Reinit Timer Interval : 2
LLDP Trap Enabled          : No
```

LLDP Port Configuration

```
=====
PORT          TX-ENABLED      RX-ENABLED      INTF-TRAP-ENABLED
-----
1/1/1         Yes             Yes             Yes
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show lldp local-device

```
show lldp local-device
```

Description

Shows global LLDP information advertised by the switch, as well as port-based data. If VLANs are configured on any active interfaces, the VLAN ID is only shown for trunk native or untagged VLAN IDs on access interfaces.

Example

Showing global LLDP information only:

```
switch# show lldp local-device

Global Data
=====

Chassis-ID       : 88:3a:30:47:c1:c0
System Name      : 6100
System Description : Aruba JL679A PL.10.06.0001-346-g56a12a8f4cf15
Management Address : 88:3a:30:47:c1:c0
Capabilities Available : Bridge, Router
Capabilities Enabled  : Bridge, Router
TTL               : 120
```

Showing all ports except **1/1/11** as administratively down:

```
switch# show lldp local-device
```



```

Global Data
=====

Chassis-ID          : 88:3a:30:47:c1:c0
System Name         : 6100
System Description   : Aruba JL679A  PL.10.06.0001-346-g56a12a8f4cf15
Management Address   : 11.11.11.11
Capabilities Available : Bridge, Router
Capabilities Enabled  : Bridge, Router
TTL                  : 120

Port Based Data
=====

Port-ID             : 1/1/11
Port-Desc           : "1/1/11"
Port Mgmt-Address   : 11.11.11.11
Port VLAN ID        : 1
Parent Interface    : interface 1/1/11

switch#

```

```

switch# show lldp local-device

Global Data
=====

Chassis-ID          : 88:3a:30:47:c1:c0
System Name         : 4100i
System Description   : Aruba JL817A  RL.10.08.0001
Management Address   : 11.11.11.11
Capabilities Available : Bridge, Router
Capabilities Enabled  : Bridge, Router
TTL                  : 120

Port Based Data
=====

Port-ID             : 1/1/11
Port-Desc           : "1/1/11"
Port Mgmt-Address   : 11.11.11.11
Port VLAN ID        : 1
Parent Interface    : interface 1/1/11

switch#

```

In this example, all the ports except **1/1/11** are administratively down, and VLAN ID 100 is configured on this access interface.

```

switch# show lldp local-device

Global Data
=====

Chassis-ID          : 1c:98:ec:e3:45:00
System Name         : switch
System Description   : Aruba
Management Address   : 192.168.10.1
Capabilities Available : Bridge, Router

```

```
Capabilities Enabled   : Bridge, Router
TTL                   : 120
```

Port Based Data
=====

```
Port-ID               : 1/1/11
Port-Desc             : "1/1/11"
Port VLAN ID         : 100
Parent Interface      : interface 1/1/11
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show lldp neighbor-info

show lldp neighbor-info [<INTERFACE-NAME>]

Description

Displays information about neighboring devices for all interfaces or for a specific interface. The information displayed varies depending on the type of neighbor connected and the type of TLVs sent by the neighbor.

Parameter	Description
<INTERFACE-NAME>	Specifies the interface for which to show information for neighboring devices. Use the format member/slot/port (for example, 1/3/1).

Examples

Showing LLDP information for all interfaces:

```
switch# show lldp neighbor-info

LLDP Neighbor Information
=====

Total Neighbor Entries       : 1
Total Neighbor Entries Deleted : 5
Total Neighbor Entries Dropped : 0
Total Neighbor Entries Aged-Out : 3

LOCAL-PORT  CHASSIS-ID          PORT-ID      PORT-DESC      TTL      SYS-NAME
```

```
-----
1/1/2      38:21:c7:5c:df:40  1/1/2      1/1/2      120      switch
1/1/3      f8:60:f0:c9:e0:a0  1/1/3      1/1/3      120      switch
```

Showing information for interface **1/1/3** when it has only one switch connected as a neighbor:

```
Aruba-6100-Switch2# show lldp neighbor-info 1/1/3

Port                               : 1/1/3
Neighbor Entries                   : 1
Neighbor Entries Deleted           : 1
Neighbor Entries Dropped           : 0
Neighbor Entries Aged-Out          : 1
Neighbor Chassis-Name              : 6100
Neighbor Chassis-Description       : Aruba JL679A PL.10.06.0001
Neighbor Chassis-ID                : 88:3a:30:47:d1:c0
Neighbor Management-Address        : 88:3a:30:47:d1:c0
Chassis Capabilities Available     : Bridge, Router
Chassis Capabilities Enabled       : Bridge, Router
Neighbor Port-ID                   : 1/1/3
Neighbor Port-Desc                 : 1/1/3
Neighbor Port VLAN ID              : 1
TTL                                : 120
Neighbor Mac-Phy details
Neighbor Auto-neg Supported        : True
Neighbor Auto-neg Enabled          : True
Neighbor Auto-neg Advertised       : 1000 BASE_TFD, 100 BASE_T4, 10 BASET_FD
Neighbor MAU Type                  : 1000 BASET_FD
```

Showing neighbor information for interface 1/3/2 when it has EEE enabled and successfully auto-negotiated:

```
switch# show lldp neighbor-info 1/3/2

Port                               : 1/3/2
Neighbor Entries                   : 1
Neighbor Entries Deleted           : 1
Neighbor Entries Dropped           : 0
Neighbor Entries Aged-Out          : 1
Neighbor Chassis-Name              : BLDG01-F1-6300
Neighbor Chassis-Description       : Aruba JL668A FL.10.07.0001BN
Neighbor Chassis-ID                : 88:3a:30:92:a5:c0
Neighbor Management-Address        : 10.6.9.15
Chassis Capabilities Available     : Bridge, Router
Chassis Capabilities Enabled       : Bridge, Router
Neighbor Port-ID                   : 1/1/1
Neighbor Port-Desc                 : 1/1/1
Neighbor Port VLAN ID              : 1
TTL                                : 120

Neighbor Mac-Phy details
Neighbor Auto-neg Supported        : true
Neighbor Auto-Neg Enabled          : true
Neighbor Auto-Neg Advertised       : 1000 BASE_TFD, 100 BASE_T4, 10 BASET_FD
Neighbor MAU type                  : 1000 BASET_FD

Neighbor EEE information           : DOT3
Neighbor TX Wake time              : 17 us
Neighbor RX Wake time              : 17 us
```

```
Neighbor Fallback time      : 17 us
Neighbor TX Echo time      : 17 us
Neighbor RX Echo time      : 17 us
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show lldp neighbor-info detail

```
show lldp neighbor-info detail
```

Description

Shows detailed LLDP neighbor information for all LLDP neighbor connected interfaces.

Examples

Showing detailed LLDP information for all interfaces:

```
switch# show lldp neighbor-info detail

LLDP Neighbor Information
=====

Total Neighbor Entries      : 6
Total Neighbor Entries Deleted : 2
Total Neighbor Entries Dropped : 0
Total Neighbor Entries Aged-Out : 2

-----

Port                        : 1/1/1
Neighbor Entries           : 1
Neighbor Entries Deleted   : 0
Neighbor Entries Dropped   : 0
Neighbor Entries Aged-Out  : 0
Neighbor Chassis-Name      : 6300
Neighbor Chassis-Description : Aruba ...
Neighbor Chassis-ID        : 38:11:17:1a:d5:00
Neighbor Management-Address : 38:11:17:1a:d5:00
Chassis Capabilities Available : Bridge, Router
Chassis Capabilities Enabled  : Bridge, Router
Neighbor Port-ID           : 1/1/4
Neighbor Port-Desc         : 1/1/4
Neighbor Port VLAN ID      : 1
TTL                        : 120
```

```
Neighbor Mac-Phy details
Neighbor Auto-neg Supported      : true
Neighbor Auto-Neg Enabled       : true
Neighbor Auto-Neg Advertised    : 1000 BASE_TFD, 100 BASE_T4, 10 BASET_FD
Neighbor MAU type                : 1000 BASETFD
```

```
Port                          : 1/1/2
Neighbor Entries              : 1
Neighbor Entries Deleted     : 0
Neighbor Entries Dropped     : 0
Neighbor Entries Aged-Out    : 0
Neighbor Chassis-Name        : 6300
Neighbor Chassis-Description : Aruba ...
Neighbor Chassis-ID          : 38:11:17:1a:d5:00
Neighbor Management-Address  : 38:11:17:1a:d5:00
Chassis Capabilities Available : Bridge, Router
Chassis Capabilities Enabled  : Bridge, Router
Neighbor Port-ID             : 1/1/5
Neighbor Port-Desc           : 1/1/5
Neighbor Port VLAN ID        : 1
TTL                          : 120
```

```
Neighbor Mac-Phy details
Neighbor Auto-neg Supported      : true
Neighbor Auto-Neg Enabled       : true
Neighbor Auto-Neg Advertised    : 1000 BASE_TFD, 100 BASE_T4, 10 BASET_FD
Neighbor MAU type                : 1000 BASETFD
```

```
Port                          : 1/1/3
Neighbor Entries              : 1
Neighbor Entries Deleted     : 0
Neighbor Entries Dropped     : 0
Neighbor Entries Aged-Out    : 0
Neighbor Chassis-Name        : 6300
Neighbor Chassis-Description : Aruba ...
Neighbor Chassis-ID          : 38:11:17:1a:d5:00
Neighbor Management-Address  : 38:11:17:1a:d5:00
Chassis Capabilities Available : Bridge, Router
Chassis Capabilities Enabled  : Bridge, Router
Neighbor Port-ID             : 1/1/6
Neighbor Port-Desc           : 1/1/6
Neighbor Port VLAN ID        : 1
TTL                          : 120
```

```
Neighbor Mac-Phy details
Neighbor Auto-neg Supported      : true
Neighbor Auto-Neg Enabled       : true
Neighbor Auto-Neg Advertised    : 1000 BASE_TFD, 100 BASE_T4, 10 BASET_FD
Neighbor MAU type                : 1000 BASETFD
```

```
Port                          : 1/1/46
Neighbor Entries              : 1
Neighbor Entries Deleted     : 0
Neighbor Entries Dropped     : 0
Neighbor Entries Aged-Out    : 0
```

```

Neighbor Chassis-Name      : 6300
Neighbor Chassis-Description : Aruba ...
Neighbor Chassis-ID       : 38:11:17:1a:d5:00
Neighbor Management-Address : 38:11:17:1a:d5:00
Chassis Capabilities Available : Bridge, Router
Chassis Capabilities Enabled  : Bridge, Router
Neighbor Port-ID          : 1/1/19
Neighbor Port-Desc        : 1/1/19
Neighbor Port VLAN ID     : 1
TTL                       : 120

Neighbor Mac-Phy details
Neighbor Auto-neg Supported : true
Neighbor Auto-Neg Enabled   : true
Neighbor Auto-Neg Advertised : 1000 BASE_TFD, 100 BASE_T4, 10 BASE_TFD
Neighbor MAU type           : 1000 BASE_TFD

```

```

-----
Port                               : 1/1/47
Neighbor Entries                   : 1
Neighbor Entries Deleted           : 0
Neighbor Entries Dropped           : 0
Neighbor Entries Aged-Out          : 0
Neighbor Chassis-Name              : 6300
Neighbor Chassis-Description       : Aruba ...
Neighbor Chassis-ID                : 38:11:17:1a:d5:00
Neighbor Management-Address        : 38:11:17:1a:d5:00
Chassis Cap                        :

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show lldp statistics

show lldp statistics [<INTERFACE-ID>]

Description

Shows global LLDP statistics or statistics for a specific interface.

Parameter	Description
<INTERFACE-ID>	Specifies an interface. Format: member/slot/port.

Example

Showing global statistics for all interfaces:

```
switch# show copp-policy statistics
switch# show lldp statistics
LLDP Global Statistics
=====

Total Packets Transmitted      : 25
Total Packets Received        : 20
Total Packets Received And Discarded : 0
Total TLVs Unrecognized       : 0

LLDP Port Statistics
=====
```

PORT-ID	TX-PACKETS	RX-PACKETS	RX-DISCARDED	TLVS-UNKNOWN
1/1/1	25	20	0	0
1/1/2	0	0	0	0
1/1/3	0	0	0	0
1/1/4	0	0	0	0
1/1/5	0	0	0	0
1/1/6	0	0	0	0
1/1/7	0	0	0	0
1/1/8	0	0	0	0
1/1/9	0	0	0	0
1/1/10	0	0	0	0
1/1/11	0	0	0	0
1/1/12	0	0	0	0
1/1/13	0	0	0	0
1/1/14	0	0	0	0
1/1/15	0	0	0	0
1/1/16	0	0	0	0
1/1/17	0	0	0	0
1/1/18	0	0	0	0
1/1/19	0	0	0	0
1/1/20	0	0	0	0
1/1/21	0	0	0	0
1/1/22	0	0	0	0
1/1/23	0	0	0	0
1/1/24	0	0	0	0
1/1/25	0	0	0	0
1/1/26	0	0	0	0
1/1/27	0	0	0	0
1/1/28	0	0	0	0

Showing statistics for interface **1/1/1**:

```
switch# show lldp statistics 1/1/1

LLDP Statistics
=====

Port Name      : 1/1/1
Packets Transmitted : 159
Packets Received  : 163
Packets Received And Discarded : 0
Packets Received And Unrecognized : 0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show lldp tlv

show lldp tlv

Description

Shows the LLDP TLVs that are configured for send and receive.

Example

```
switch# show lldp tlv

TLVs Advertised
=====

Management Address
Port Description
Port VLAN-ID
System Capabilities
System Description
System Name
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Cisco Discovery Protocol (CDP)

Cisco Discovery Protocol (CDP) is a proprietary layer 2 protocol supported by most Cisco devices. It is used to exchange information, such as software version, device capabilities, and voice VLAN information, between directly connected devices, such as a VoIP phone and a switch.

CDP support

By default, CDP is enabled on each active switch port. This is a read-only capability, which means the switch can receive and store information about adjacent CDP devices, but does not generate CDP packets (except when communicating with Cisco IP phones.)

The switch supports CDPv2 only and does not support SNMP MIB traps.

When a CDP-enabled port receives a CDP packet from another CDP device, it enters data for that device into the CDP Neighbors table, along with the port number on which the data was received. It does not forward the packet. The switch also periodically purges the table of any entries that have expired. (The holdtime for any data entry in the switch CDP Neighbors table is configured in the device transmitting the CDP packet and cannot be controlled in the switch receiving the packet.) A switch reviews the list of CDP neighbor entries every three seconds and purges any expired entries.

Support for legacy Cisco IP phones

Autoconfiguration of legacy Cisco IP phones for tagged voice VLAN support requires CDPv2.

On initial boot-up, and sometimes periodically, a Cisco phone queries the switch and advertises information about itself using CDPv2. When the switch receives the VoIP VLAN Query TLV (type 0x0f) from the phone, the switch immediately responds with the voice VLAN ID in a reply packet using the VoIP VLAN Reply TLV (type 0x0e). This enables the Cisco phone to boot properly and send traffic on the advertised voice VLAN ID.

The switch CDP packet includes these TLVs:

- CDP Version: 2
- CDP TTL: 180 seconds
- Checksum
- Capabilities (type 0x04): 0x0008 (is a switch)
- Native VLAN: The PVID of the port
- VoIP VLAN Reply (type 0xe): voice VLAN ID (same as advertised by LLDP-MED)
- Trust Bitmap (type 0x12): 0x00
- Untrusted port CoS (type 0x13): 0x00

CDP commands

cdp

cdp

Description

Configures CDP support globally on all active interfaces or on a specific interface. By default, CDP is enabled on all active interfaces.

When CDP is enabled, the switch adds entries to its CDP Neighbors table for any CDP packets it receives from neighboring CDP devices.

When CDP is disabled, the CDP Neighbors table is cleared and the switch drops all inbound CDP packets without entering the data in the CDP Neighbors table.

The `no` form of this command disables CDP support globally on all active interfaces or on a specific interface.

Examples

Enabling CDP globally:

```
switch(config)# cdp
```

Disabling CDP globally:

```
switch(config)# no cdp
```

Enabling CDP on interface **1/1/1**:

```
switch(config)# interface 1/1/1  
switch(config-if)# cdp
```

Disabling CDP on interface **1/1/1**:

```
switch(config)# interface 1/1/1  
switch(config-if)# no cdp
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config config-if	Administrators or local user group members with execution rights for this command.

clear cdp counters

```
clear cdp counters
```

Description

Clears CDP counters.

Examples

Clearing CDP counters:

```
switch(config) clear cdp counters
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

clear cdp neighbor-info

clear cdp neighbor-info

Description

Clears CDP neighbor information.

Examples

Clearing CDP neighbor information:

```
switch(config) clear neighbor-info
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show cdp

show cdp

Description

Shows CDP information for all interfaces.

Examples

Showing CDP information:

```
switch(config)# show cdp
CDP Global Information
=====
CDP           : Enabled
CDP Mode      : Rx only
CDP Hold Time : 180 seconds

Port          CDP
-----
1/1/1         Enabled
1/1/2         Enabled
1/1/3         Enabled
```

1/1/4	Enabled
1/1/5	Enabled
1/1/6	Enabled
1/1/7	Enabled
1/1/8	Enabled
1/1/9	Enabled
1/1/10	Enabled

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show cdp neighbor-info

show cdp neighbor-info <INTERFACE-ID>

Description

Shows CDP information for all neighbors or for CDP information on a specific interface.

Parameter	Description
<INTERFACE-ID>	Specifies an interface. Format: member/slot/port.

Examples

Showing all CDP neighbor information:

```
switch(config)# show cdp neighbor-info
Port          Device ID          Platform          Capability
-----
1/1/1         myswitch           cisco WS-C2950-12  SI
```

Showing CDP information for interface **1/1/1**:

```
switch(config)# show cdp neighbor-info 1/1/1
Local Port : 1/1/1
MAC        : 3c:a8:2a:7b:6b:2b
Device ID   : SEPd4adbd2a30d6
Address     : 2.71.0.230
Platform    : Cisco IP Phone 3905
Duplex      : full
Capability  : host
Voice VLAN Support : Yes
Neighbor Port-ID : Port 1
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show cdp traffic

show cdp neighbor-info

Description

Shows CDP statistics for each interface.

Examples

Showing CDP traffic statistics:

```
switch(config)# show cdp traffic
CDP Statistics
=====
Port          Transmitted Frames    Received Frames    Discarded Frames
-----
1/1/1         0                     4                 0
1/1/2         0                     0                 0
1/1/3         0                     2                 0
1/1/4         0                     0                 0
1/1/5         0                     0                 0
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

Zero Touch Provisioning (ZTP) enables the auto-configuration of factory default switches without a network administrator onsite.

When a switch is booted from its factory default configuration, ZTP autoprovisions the switch by automatically downloading and installing a firmware file, a configuration file, or both. With ZTP, even a nontechnical user (for example: a store manager in a retail chain or a teacher in a school) can deploy devices at a site.

ZTP support

The switch supports standards-based Zero Touch Provisioning (ZTP) operations as follows:

- The switch must be running the factory default configuration.
- ZTP operations are supported over IPv4 connections only. IPv6 connections are not supported for ZTP operations.
- You must configure the DHCP server to provide a standards-based ZTP server solution. Options and features that are specific to Network Management Solution (NMS) tools, such as AirWave, are not supported.
 - Supported DHCP options are:

DHCP option	Description
43	Vendor Specific Information
43 suboption 144	Name of the configuration file
43 suboption 145	Name of the firmware image file
43 suboption 148	FQDN or IPv4 address of the HTTP Proxy
60	Vendor Class Identifier (VCI)
66	IPv4 address of the TFTP server (Specifying a host name instead of an IP address is not supported.)
67	Name of the configuration file (Option 43 suboption 144 takes precedence over this option.)

- The configuration file is a text file or JSON file that becomes the startup and running configuration on the switch after the ZTP operation is complete. The configuration can be in CLI or in JSON format.
- When the switch is started using the factory default configuration, the ZTP operation is started automatically and is active until any running configuration of the switch is modified. There is no CLI command required to start the operation.

The switch supports the following standards:

- [RFC 2131](#), *Dynamic Host Configuration Protocol*.
- [RFC 2132](#), *DHCP Options and BOOTP Vendor Extensions*. Support is limited to the options listed in the table "Supported DHCP options for ZTP on AOS-CX."

Hewlett Packard Enterprise recommends that you implement ZTP in a secure and private environment. Any public access can compromise the security of the switch, as follows:

- ZTP is enabled only in the factory default configuration of the switch, DHCP snooping is not enabled. The Rogue DHCP server must be manually managed.
- The DHCP offer is in plain data without encryption.

Setting up ZTP on a trusted network

The following procedure is an overview of setting up a Zero Touch Provisioning (ZTP) environment to provision newly installed switches automatically. The procedure is intended for network administrators who are familiar with automatically provisioning switches in a network, and does not provide detailed information about configuring or managing switches.

Procedure

1. For each switch model to be provisioned using ZTP, do the following:
 - a. Obtain the switch firmware image file.
 - b. Prepare the switch configuration file. The configuration file becomes the running configuration and the startup configuration on the switch.
2. Set up a TFTP server and record its IP address. The address is required when you set up the DHCP server. The switch must be able to reach the TFTP server and DHCP server on the same subnet.
Switches support provisioning through a network connected to a data port or through a network connected to the in-band management interface VLAN 1.
3. Publish the configuration files and image files to the TFTP server. You need to know the locations of the files and the IP address of the TFTP server when you set up the vendor class options on the DHCP server.
4. On the DHCP server, set up vendor classes for each switch model you plan to provision. To do this you need the following information:
 - The IP address of the TFTP server. Using a host name is not supported.
 - The path to the switch configuration and firmware image files on the TFTP server.
 - The vendor class identifier (VCI) for each switch model.

You can obtain the VCI by entering the `show dhcp client vendor-class-identifier` command from a switch CLI command prompt in the manager context. The VCI is the text string in the response that starts with `Aruba`.

For example:

```
switch# show dhcp client vendor-class-identifier
Vendor Class Identifier:  Aruba xxxxx xxxx
```

Where x indicates the switch model number.

5. At the installation site, provide the switch installer with a Cat6 network cable connected to the network that includes the DHCP and TFTP servers, and information about the switch port to use. The switch installer plugs the cable into the data port you specify.

The ZTP operation begins when power is applied to the switch after the network cable is installed.

6. Assuming the downloaded configuration includes a way to access the CLI of the switch, you can enter the following command to show the options offered by the DHCP server and the status of the ZTP operation:

```
show ztp information
```

ZTP process during switch boot

1. The switch boots up with the factory default configuration.

If the ZTP operation detects that the switch configuration is different from the factory default configuration, the ZTP operation ends. The switch must be configured at the installation site.

2. The switch sends out a DHCP discovery from the in-band management interface.

The switch waits to receive DHCP options indefinitely or until the running configuration is modified. If a DHCP IP address is received but no DHCP options are received, the switch waits an additional minute before ending the ZTP operation.

After the ZTP operation ends, there is no automatic retry. You can either attempt to boot the switch with the factory default configuration again, configure the switch at the installation site, or use the ZTP force-provision CLI to trigger the ZTP process, ignoring the present running configuration of the switch.

- Once force-provision is enabled, new DHCP requests are sent from the switch. Disabling force-provision does not stop the DHCP already in progress, but only changes the switch configuration status of force-provision.
 - If ZTP fails while force-provision is enabled, there is no automatic retry. To retry, `ztp force-provision` should be disabled and re-enabled to clear the current ZTP state and send a new DHCP request. When `ztp force-provision` is already enabled on the switch, re-enabling it results in no operation.
 - If the DHCP server is configured to provide both ZTP image and configuration options and there is a non-default startup configuration present on the switch, clearing the non-default startup configuration before triggering `ztp force-provision` is recommended. If an image is downloaded via ZTP, the switch reboots once the image download is complete and ZTP force-provision configuration is lost, causing ZTP to enter into a failed state. ZTP force-provision will need to be enabled again to continue the process.
3. The DHCP server responds with an offer containing the following:
 - The IPv4 address of the TFTP server
 - One or both of the following:
 - The name of the firmware image file
 - The name of the configuration file
 - Aruba Central Location (optional) including the shared token value for the on-premise server
 - HTTP Proxy Location (optional)
 4. If a firmware image file is offered, the ZTP operation downloads the image file from the TFTP server to the switch. If the current switch image and downloaded firmware image version do not match, then the switch boots with the downloaded image:
 - If the image upgrade fails, the switch retains its original firmware image and the ZTP operation ends with a failed status.

- If the image upgrade succeeds, the ZTP operation is started again after the switch reboots. Because the downloaded image file matches the image file installed on the switch, the ZTP operation continues, and checks if a configuration file is offered.
- 5. If a configuration file is offered, the ZTP operation downloads the configuration file copies the file to the running-config and then to the startup-config of the switch:
 - If the startup configuration update fails, the switch retains its factory-default running configuration and the ZTP operation ends with a failed status.
 - If the copy operation fails, the ZTP operation ends with a failed status.
 - If the copy operation succeeds, the ZTP operation ends successfully.

ZTP commands

show ztp information

```
show ztp information
```

Description

Shows information about Zero Touch Provisioning (ZTP) operations performed on the switch.

Usage

When a switch configured to use ZTP is booted from a factory default configuration, the switch contacts a DHCP server, which offers options for obtaining files used to provision the switch:

- The IP address of the TFTP server
- The name of the image file
- The name of the configuration file

The `show ztp information` command shows the options offered by the DHCP server and the status of the ZTP operation.

The status of the ZTP operation is one of the following:

Success

The ZTP operation succeeded.

One of the following is true:

- Both the running configuration and the startup configuration were updated.
- The IP address of the TFTP server was received, but the offer did not include a configuration file or a firmware image file.
- Any combination of vendor encapsulated DHCP options are received as configured, along with the firmware image and switch configuration file.
- Only vendor encapsulated DHCP options are configured and are received accordingly.

Failed - Custom startup configuration detected

The switch was booted from a configuration that is not the factory default configuration. For example, the administrator password has been set.

Failed - Timed out while waiting to receive ZTP options

Either the switch received the DHCP IPv4 address but no ZTP options were received within 1 minute or ZTP force-provision is triggered and no ZTP options are received within 3 minutes.

Failed - Detected change in running configuration

The running configuration was modified by a user while the ZTP operation was in progress.

Failed - TFTP server unreachable

The TFTP server is not reachable at the specified IP address.

Failed - TFTP server information unavailable

The image file name or config file name is provided without the TFTP server location to fetch the files from and ZTP enters failed state.

Failed - Invalid configuration file received

Either the file transfer of the configuration file failed, or the configuration file is invalid (an error occurred while attempting to apply the configuration).

Failed - Invalid image file received

Either the file transfer of the firmware image file failed, or the firmware image file is invalid (an error occurred while verifying the image).

Examples

Showing switch image download in progress after receiving ZTP options:

```
switch# show ztp information
TFTP Server           : 10.0.0.2
Image File            : TL_10_02_0001.swi
Configuration File     : config_file
ZTP Status            : In-progress - Image download and verification
Aruba Central Location : secure.arubanetworks.com
Aruba Central Shared Token : aruba123
Force-Provision       : Disabled
HTTP Proxy Location    : http.proxy.arubanetworks.com
```

Showing switch image download failure after receiving ZTP options:

```
switch# show ztp information
TFTP Server           : 10.0.0.2
Image File            : TL_10_02_0001.swi
Configuration File     : config_file
ZTP Status            : Failed - Unable to download image
Aruba Central Location : secure.arubanetworks.com
Aruba Central Shared Token : aruba123
Force-Provision       : Disabled
HTTP Proxy Location    : http.proxy.arubanetworks.com
```

Showing switch configuration download in progress after receiving ZTP options:

```
switch# show ztp information
TFTP Server           : 10.0.0.2
Image File            : TL_10_02_0001.swi
Configuration File     : config_file
ZTP Status            : In-progress - Configuration download
Aruba Central Location : secure.arubanetworks.com
Aruba Central Shared Token : aruba123
Force-Provision       : Disabled
HTTP Proxy Location    : http.proxy.arubanetworks.com
```

Showing switch configuration download failure after receiving ZTP options:

```
switch# show ztp information
TFTP Server      : 10.0.0.2
Image File       : TL_10_02_0001.swi
Configuration File : config_file
ZTP Status       : Failed - Unable to download configuration
Aruba Central Location : secure.arubanetworks.com
Aruba Central Shared Token : aruba123
Force-Provision   : Disabled
HTTP Proxy Location : http.proxy.arubanetworks.com
```

Showing switch failure to update start-up configuration after downloading configuration received from ZTP options:

```
switch# show ztp information
TFTP Server      : 10.0.0.2
Image File       : TL_10_02_0001.swi
Configuration File : config_file
ZTP Status       : Failed - Could not copy to start-up configuration
Aruba Central Location : secure.arubanetworks.com
Aruba Central Shared Token : aruba123
Force-Provision   : Disabled
HTTP Proxy Location : http.proxy.arubanetworks.com
```

In the following example, the ZTP operation succeeded, and both an image file and a configuration file were provided.

```
switch# show ztp information
TFTP Server      : 20.1.1.4
Image File       : PL_10_06_0001BT.swi
Configuration File : bristol_maxlimit
Status           : Success
Force-Provision   : Disabled
switch#
```

In the following example, the ZTP option succeeded. A configuration file was not provided, but an image file was provided.

```
switch# show ztp information
TFTP Server      : 20.1.1.4
Image File       : NA
Configuration File : bristol_maxlimit
Status           : Success
Force-Provision   : Disabled
switch#
```

In the following example, the ZTP operation failed because the TFTP server was unreachable.

```
switch# show ztp information
TFTP Server      : 20.1.1.4
Image File       : PL_10_06_0001BT.swi
Configuration File : bristol_maxlimit
Status           : Failed - TFTP server unreachable
```

```
Force-Provision      : Disabled
switch#
```

In the following example, the ZTP operation was stopped because the switch did not receive any options from the DHCP server for ZTP within 1 minute of receiving the IP address from the server.

```
switch## show ztp information
TFTP Server          : NA
Image File           : NA
Configuration File    : NA
Status               : Failed - Timed out while waiting to receive ZTP options
Force-Provision      : Disabled
switch#
```

In the following example, the ZTP operation was stopped because the switch was booted from a configuration that was not the factory default configuration.

```
switch# show ztp information
TFTP Server          : 20.1.1.4
Image File           : PL_10_06_0001BT.swi
Configuration File    : bristol_maxlimit
Status               : Failed - Custom startup configuration detected
Force-Provision      : Disabled
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

ztp force provision

```
ztp force-provision
no ztp force-provision
```

Description

Starts on-demand ZTP.

Usage

DHCP options received are processed independent of the current state of configuration on the switch. Previous ZTP TFTP Server, Image File, Configuration File, Aruba Central Location, and HTTP Proxy location options are cleared and the switch sends a DHCP request.

Examples

In the following example, force-provision is enabled.

```
switch# configure terminal
switch(config)# ztp force-provision
```

In the following example, force-provision status is checked while enabled.

```
switch# show ztp information
TFTP Server           : 10.0.0.2
Image File            : TL_10_02_0001.swi
Configuration File    : ztp.cfg
Status               : Success
Aruba Central Location : NA
Aruba Central Shared Token : NA
Force-Provision       : Enabled
HTTP Proxy Location   : NA
```

In the following example, force-provision is disabled.

```
switch# configure terminal
switch(config)# no ztp force-provision
```

In the following example, force-provision status is checked while disabled.

```
switch# show ztp information
TFTP Server           : 10.0.0.2
Image File            : TL_10_02_0001.swi
Configuration File    : ztp.cfg
Status               : Success
Aruba Central Location : NA
Aruba Central Shared Token : NA
Force-Provision       : Disabled
HTTP Proxy Location   : NA
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Administrators or local user group members with execution rights for this command.

clear events

clear events

Description

Clears up event logs. Using the `show events` command will only display the logs generated after the `clear events` command.

Examples

Clearing all generated event logs:

```
switch# show events
-----
show event logs
-----
2018-10-14:06:57:53.534384|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource
utilization poll interval is changed to 27
2018-10-14:06:58:30.805504|lldpd|103|LOG_INFO|MSTR|1|Configured LLDP tx-timer to 36
2018-10-14:07:01:01.577564|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource
utilization poll interval is changed to 49

switch# clear events

switch# show events
-----
show event logs
-----
2018-10-14:07:03:05.637544|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource
utilization poll interval is changed to 34
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

console baud-rate

console baud-rate <SPEED>

```
no console baud-rate <SPEED>
```

Description

Sets the console serial port speed.

The no form of this command resets the console port speed to its default of 115200 bps.

Parameter	Description
<SPEED>	Selects the console port speed in bps, either 9600 or 115200.

Usage

The speed change occurs immediately for the active console session. The console will be inaccessible until the client terminal settings are updated to match the console port speed that you set. After the command is executed you will be prompted to log in again.

Examples

Setting the console port speed to 9600 bps:

```
switch(config)# console baud-rate 9600  
This command will configure the baud rate immediately for the active serial  
console session. After the command is executed the user will be prompted to  
re-login. The serial console will be inaccessible until the terminal client  
settings are updated to match the baud rate of the switch.  
Continue (y/n)? y
```

Resetting the console port to its default speed 115200 bps:

```
switch(config)# no console baud-rate
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

domain-name

```
domain-name <NAME>  
no domain-name [<NAME>]
```

Description

Specifies the domain name of the switch.

The `no` form of this command sets the domain name to the default, which is no domain name.

Parameter	Description
<code><NAME></code>	Specifies the domain name to be assigned to the switch. The first character of the name must be a letter or a number. Length: 1 to 32 characters.

Examples

Setting and showing the domain name:

```
switch# show domain-name

switch# config
switch(config)# domain-name example.com
switch(config)# show domain-name
example.com
switch(config)#
```

Setting the domain name to the default value:

```
switch(config)# no domain-name
switch(config)# show domain-name

switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

hostname

```
hostname <HOSTNAME>
no hostname [<HOSTNAME>]
```

Description

Sets the host name of the switch.

The `no` form of this command sets the host name to the default value, which is `switch`.

Parameter	Description
<code><HOSTNAME></code>	Specifies the host name. The first character of the host name must be a letter or a number. Length: 1 to 32 characters. Default: switch

Examples

Setting and showing the host name:

```
switch# show hostname
switch
switch# config
switch(config)# hostname myswitch
myswitch(config)# show hostname
myswitch
```

Setting the host name to the default value:

```
myswitch(config)# no hostname
switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

show boot-history

show boot-history [all]

Description

Shows boot information. When no parameters are specified, shows the most recent information about the boot operation, and the three previous boot operations for the active management module. When the `all` parameter is specified, shows the boot information for the active management module.

Parameter	Description
<code>all</code>	Shows boot information for the active management module and all available line modules.

Usage

This command displays the boot-index, boot-ID, and up time in seconds for the current boot. If there is a previous boot, it displays boot-index, boot-ID, reboot time (based on the time zone configured in the system) and reboot reasons. Previous boot information is displayed in reverse chronological order.

Index

The position of the boot in the history file. Range: 0 to3.

Boot ID

A unique ID for the boot . A system-generated 128-bit string.

Current Boot, up for <SECONDS> seconds

For the current boot, the `show boot-history` command shows the number of seconds the module has been running on the current software.

Timestamp boot reason

For previous boot operations, the `show boot-history` command shows the time at which the operation occurred and the reason for the boot. The reason for the boot is one of the following values:

<DAEMON-NAME> crash

The daemon identified by <DAEMON-NAME> caused the module to boot.

Kernel crash

The operating system software associated with the module caused the module to boot.

Reboot requested through database

The reboot occurred because of a request made through the CLI or other API.

Uncontrolled reboot

The reason for the reboot is not known.

Examples

Showing the boot history of the active management module:

```
switch# show boot-history
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs

Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show capacities

show capacities <FEATURE>

Description

Shows system capacities and their values for all features or a specific feature.

Parameter	Description
<FEATURE>	Specifies a feature. For example, aaa.

Usage

Capacities are expressed in user-understandable terms. Thus they may not map to a specific hardware or software resource or component. They are not intended to define a feature exhaustively.

Examples

Showing classifier-related capacities on the 6100:

```
switch# show capacities classifier

System Capacities: Filter Classifier
Capacities Name                                     Value
-----
Maximum number of Access Control Entries configurable in a system 4096
Maximum number of Access Control Lists configurable in a system    512
Maximum number of class entries configurable in a system           4096
Maximum number of classes configurable in a system                 512
Maximum number of entries in an Access Control List                1024
Maximum number of entries in a class                              1024
Maximum number of entries in a policy                              64
Maximum number of classifier policies configurable in a system     512
Maximum number of policy entries configurable in a system          4096
```

Showing all available capacities on the 6100:

```
switch# show capacities

System Capacities:
Capacities Name
Value
-----
Maximum number of Access Control Entries configurable in a system
4096
Maximum number of Access Control Lists configurable in a system
512
Maximum number of class entries configurable in a system
4096
```

Maximum number of classes configurable in a system
512

Maximum number of entries in an Access Control List
1024

Maximum number of entries in a class
1024

Maximum number of entries in a policy
64

Maximum number of classifier policies configurable in a system
512

Maximum number of policy entries configurable in a system
4096

Maximum number of clients supported for tracking the IP address in the system
128

Maximum number of dynamic VLANs that can be allowed using MVRP
256

Maximum number of nexthops per IP ECMP group
1

Maximum number of IP neighbors (IPv4+IPv6) supported in the system
1024

Maximum number of IPv4 neighbors(# of ARP entries) supported in the system
1024

Maximum number of IPv6 neighbors(# of ND entries) supported in the system
512

Maximum number of L2 MAC addresses supported in the system
8192

Maximum number of L3 Groups for IP Tunnels and ECMP Groups
1

Maximum number of L3 Destinations for Routes, Nexthops in Tunnels and ECMP groups
1024

Maximum number of configurable LAG ports
8

Maximum number of members supported by a LAG port
8

Maximum number of VLANs across ports allowed in loop-protect
3328

Maximum number of IGMP/MLD groups supported
512

Maximum number of IGMP/MLD snooping groups supported
512

Maximum number of Mirror Sessions configurable in a system
4

Maximum number of enabled Mirror Sessions in a system
4

Maximum number of mstp instances configurable in a system
16

Maximum number of Clients that can be authenticated on a port
32

Maximum number of Device Profiles allowed to be created on the system
8

Maximum number of Port Access Roles allowed to be created on the system
32

Maximum number of MAC Address that can be authorized on a port
32

Maximum number of Port Access Role VLAN IDs allowed to be created on the system
50

Maximum number of Port Access Role VLAN names allowed to be created on the system
50

Maximum number of RBAC rules per user group
1024

Maximum number of RPVST VLANs configurable on the system
16

```
Maximum number of RPVST VPORTs supported in a system
512
Maximum number of SVIs supported in the system
16
Maximum number of routes (IPv4+IPv6) on the system
512
Maximum number of IPv4 routes on the system
512
Maximum number of IPv6 routes on the system
512
Maximum number of VLANs supported in the system
512
```

Showing all available capacities for mirroring:

```
switch# show capacities mirroring

System Capacities: Filter Mirroring
Capacities Name                                     Value
-----
Maximum number of Mirror Sessions configurable in a system      4
Maximum number of enabled Mirror Sessions in a system           4
```

Showing all available capacities for MSTP:

```
switch# show capacities mstp

System Capacities: Filter MSTP
Capacities Name                                     Value
-----
Maximum number of mstp instances configurable in a system       64
```

Showing all available capacities for VLAN count:

```
switch# show capacities vlan-count

System Capacities: Filter VLAN Count
Capacities Name                                     Value
-----
Maximum number of VLANs supported in the system               4094
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show capacities-status

show capacities-status <FEATURE>

Description

Shows system capacities status and their values for all features or a specific feature.

Parameter	Description
<FEATURE>	Specifies the feature, for example <code>aaa</code> for which to display capacities, values, and status. Required.

Examples

Showing the system capacities status for all features:

```
switch# show capacities-status
```

```
System Capacities Status
Capacities Status Name                                     Value
Maximum
-----
--
Number of Access Control Entries currently configured      0    4096
Number of Access Control Lists currently configured        0    512
Number of class entries currently configured               0    4096
Number of classes currently configured                     0    512
Number of policies currently configured                    0    512
Number of policy entries currently configured              0    4096
Number of dynamic VLANs currently learnt using MVRP       0    256
Number of IP neighbor (IPv4+IPv6) entries                 1    1024
Number of IPv4 neighbor(ARP) entries                      1    1024
Number of IPv6 neighbor(ND) entries                       0    512
Number of L3 Groups for IP Tunnels and ECMP Groups currently configured 0     1
Number of L3 Destinations for Routes, Nexthops in ECMP groups and
  Tunnels currently configured                             0    1024
Number of Mirror Sessions currently configured             0     4
Number of Mirror Sessions currently enabled               0     4
Number of mstp instances currently configured              0    16
Number of RPVST VLANs currently configured                0    16
Number of routes (IPv4+IPv6) currently configured          1    512
Number of IPv4 routes currently configured                 1    512
Number of IPv6 routes currently configured                 0    512
Number of VLANs currently configured                      1    512
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show console

show console

Description

Shows the serial console port current speed.

Examples

Showing the console port current speed:

```
switch# show console
Baud Rate: 9600
```

Command History

Release	Modification
10.08	Command introduced

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show core-dump

show core-dump all

Description

Shows core dump information about the specified module. When no parameters are specified, shows only the core dumps generated in the current boot of the management module. When the `all` parameter is specified, shows all available core dumps.

Parameter	Description
all	Shows all available core dumps.

Usage

When no parameters are specified, the `show core-dump` command shows only the core dumps generated in the current boot of the management module. You can use this command to determine when any crashes are occurring in the current boot.

If no core dumps have occurred, the following message is displayed: `No core dumps are present`

To show core dump information for the standby management module, you must use the `standby` command to switch to the standby management module and then execute the `show core-dump` command.

In the output, the meaning of the information is the following:

Daemon Name

Identifies name of the daemon for which there is dump information.

Instance ID

Identifies the specific instance of the daemon shown in the **Daemon Name** column.

Present

Indicates the status of the core dump:

Yes

The core dump has completed and available for copying.

In Progress

Core dump generation is in progress. Do not attempt to copy this core dump.

Timestamp

Indicates the time the daemon crash occurred. The time is the local time using the time zone configured on the switch.

Build ID

Identifies additional information about the software image associated with the daemon.

Examples

Showing core dump information for the current boot of the active management module only:

```
switch# show core-dump
=====
Daemon Name      | Instance ID | Present   | Timestamp                | Build ID
=====
hpe-fand         | 1399        | Yes       | 2017-08-04 19:05:34      | 1246d2a
hpe-sysmond      | 957         | Yes       | 2017-08-04 19:05:29      | 1246d2a
=====
Total number of core dumps : 2
=====
```

Showing all core dumps:

```
switch# show core-dump all
=====
Management Module core-dumps
=====
Daemon Name      | Instance ID | Present   | Timestamp                | Build ID
=====
hpe-sysmond      | 513         | Yes       | 2017-07-31 13:58:05      | e70f101
hpe-tempd        | 1048        | Yes       | 2017-08-13 13:31:53      | e70f101
hpe-tempd        | 1052        | Yes       | 2017-08-13 13:41:44      | e70f101
=====
Line Module core-dumps
=====
Line Module : 1/1
=====
dune_agent_0     | 18958       | Yes       | 2017-08-12 11:50:17      | e70f101
dune_agent_0     | 18842       | Yes       | 2017-08-12 11:50:09      | e70f101
=====
```


Total number of core dumps : 5

=====

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show domain-name

show domain-name

Description

Shows the current domain name.

Usage

If there is no domain name configured, the CLI displays a blank line.

Example

Setting and showing the domain name:

```
switch# show domain-name

switch# config
switch(config)# domain-name example.com
switch(config)# show domain-name
example.com
switch(config)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show environment fan



```
show environment fan is not available for JL679A.
```

```
show environment fan
```

Description

Shows the status information for all fans and fan trays (if present) in the system.

Usage

For fan trays, `Status` is one of the following values:

`ready`

The fan tray is operating normally.

`fault`

The fan tray is in a fault event. The status of the fan tray does not indicate the status of fans.

`empty`

The fan tray is not installed in the system.

For fans:

`Speed`

Indicates the relative speed of the fan based on the nominal speed range of the fan.

`N/A`

This value is not applicable to the 6000 or 6100.

`Direction`

The direction of airflow through the fan. Values are:

`left-to-right`

Air flows from the left of the system to the right of the system.

`N/A`

The fan is not installed.

`Status`

Fan status. Values are:

`uninitialized`

The fan has not completed initialization.

`ok`

The fan is operating normally.

`fault`

The fan is in a fault state.

`empty`

The fan is not installed.

Examples

Showing output for systems with fan trays for 6100 switch series:

```
switch# show environment fan
```

```
Fan information
```

Mbr/Fan	Product Name	Serial Number	Speed	Direction	Status	RPM
1/1	N/A	N/A	N/A	left-to-right	ok	N/A

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show environment led

show environment led

Description

Shows state and status information for all the configurable LEDs in the system.

Example

Showing state and status for LED:

```
switch# show environment led
Mbr/Name      State      Status
-----
1/locator     off        ok
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show environment power-supply

show environment power-supply

Description

Shows status information about all power supplies in the switch.

Usage

The following information is provided for each power supply:

Mbr/PSU

Shows the member and slot number of the power supply.

Product Number

Shows the product number of the power supply.

Serial Number

Shows the serial number of the power supply, which uniquely identifies the power supply.

PSU Status

The status of the power supply. Values are:

OK

Power supply is operating normally.

OK*

Power supply is operating normally, but it is the only power supply in the chassis. One power supply is not sufficient to supply full power to the switch. When this value is shown, the output of the command also shows a message at the end of the displayed data.

Absent

No power supply is installed in the specified slot.

Input fault

The power supply has a fault condition on its input.

Output fault

The power supply has a fault condition on its output.

Warning

The power supply is not operating normally.

Wattage Maximum

Shows the maximum amount of wattage that the power supply can provide.

Example

Showing the output when only one power supply is installed in the switch:

```
switch# show environment power-supply
      Product  Serial      PSU      Wattage
Mbr/PSU Number   Number    Status    Maximum
-----
1/1      N/A      N/A        OK         500
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show environment temperature

show environment temperature [detail]

Description

Shows the temperature information from sensors in the switch that affect fan control.

Parameter	Description
detail	Shows detailed information from each temperature sensor.

Usage

Temperatures are shown in Celsius.

Valid values for status are the following:

normal

Sensor is within nominal temperature range.

min

Lowest temperature from this sensor.

max

Highest temperature from this sensor.

low_critical

Lowest threshold temperature for this sensor.

critical

Highest threshold temperature for this sensor.

fault

Fault event for this sensor.

emergency

Over temperature event for this sensor.

Examples

Showing current temperature information for a 6100 switch:

```
switch# show environment temperature
Temperature information
```

Mbr/Slot-Sensor	Module Type	Current temperature	Status
1/1-COMe-Daughter-Boar	line-card-module	66.45 C	normal
1/1-PCIE-Switch	line-card-module	95.82 C	normal
1/1-Processor	line-card-module	00.00 C	fault
1/1-Switch-ASIC	line-card-module	116.36 C	emergency
1/1-Switch-ASIC-Internal	line-card-module	108.25 C	critical
1/2-COMe-Daughter-Boar	line-card-module	67.29 C	normal
1/2-PCIE-Switch	line-card-module	95.82 C	normal
1/2-Processor-1	line-card-module	72.92 C	normal
1/2-Processor-2	line-card-module	73.05 C	normal
1/2-Switch-ASIC	line-card-module	97.41 C	normal
1/2-Switch-ASIC-Internal	line-card-module	97.62 C	normal
...			

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show events

```
show events [ -e <EVENT-ID> |
-s {emergency | alert | critical | error | warning | notice | info | debug} |
-r |
-a |
-n <COUNT> |
-i <MEMBER-SLOT> |
-m {active | standby} |
-c {lldp | ospf | ...} |
-d {lldpd | bgpd | fand | ...}]
```

Description

Shows event logs generated by the switch modules since the last reboot.

Parameter	Description
-e <EVENT-ID>	Shows the event logs for the specified event ID. Event ID range: 101 through 99999.
-s {emergency alert critical error warning notice info debug}	Shows the event logs for the specified severity. Select the severity from the following list: ■ emergency: Displays event logs with severity emergency only. ■ alert: Displays event logs with severity alert and above. ■ critical: Displays event logs with severity critical and above. ■ error: Displays event logs with severity error and above. ■ warning: Displays event logs with severity warning and above. ■ notice: Displays event logs with severity notice and above. ■ info: Displays event logs with severity info and above. ■ debug: Displays event logs with all severities.
-r	Shows the most recent event logs first.
-a	Shows all event logs, including those events from previous boots.
-n <COUNT>	Displays the specified number of event logs.
-c {lldp ospf ...}	Shows the event logs for the specified event category. Enter <code>show event -c</code> for a full listing of supported categories with descriptions.
-d {lldpd bgpd fand ...}	Shows the event logs for the specified process. Enter <code>show event -d</code> for a full listing of supported daemons with descriptions.

Examples

Showing event logs:

```
switch# show events
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to
70:72:cf:51:50:7c
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to
up for bridge_normal interface
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1
in Hardware
```

Showing the most recent event logs first:

```
switch# show events -r
-----
show event logs
-----
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1
in Hardware
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to
up for bridge_normal interface
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to
70:72:cf:51:50:7c
```

Showing all event logs:

```
switch# show events -a
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to
70:72:cf:51:50:7c
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to
up for bridge_normal interface
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1
in Hardware
```

Showing event logs related to LACP:

```
switch# show events -c lacp
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to
70:72:cf:51:50:7c
```

Showing event logs as per the specified member/slot ID:

```
switch# show events -i 1/1
-----
show event logs
-----
2017-08-17:22:32:25.743991|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource
utilization poll interval is changed to 313
2017-08-17:22:33:01.692860|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource
utilization poll interval is changed to 23
```

```

2017-08-17:22:33:06.181436|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource
utilization poll interval is changed to 512
2017-08-17:22:33:06.181436|systemd-coredump|1201|LOG_CRIT|LC|1/1|hpe-sysmond
crashed due to signal:11

```

Showing event logs as per the specified process:

```

switch# show events -d lacpd
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to
70:72:cf:51:50:7c

```

Displaying the specified number of event logs:

```

switch# show events -n 5
-----
show event logs
-----
2018-03-21:06:12:15.500603|arpmgrd|6101|LOG_INFO|AMM|-|ARPMGRD daemon has started
2018-03-21:06:12:17.734405|lldpd|109|LOG_INFO|AMM|-|Configured LLDP tx-delay to 2
2018-03-21:06:12:17.740517|lacpd|1307|LOG_INFO|AMM|-|LACP system ID set to
70:72:cf:d4:34:42
2018-03-21:06:12:17.743491|vrfmgrd|5401|LOG_INFO|AMM|-|Created a vrf entity
42cc3df7-1113-412f-b5cb-e8227b8c22f2
2018-03-21:06:12:17.904008|vrfmgrd|5401|LOG_INFO|AMM|-|Created a vrf entity
4409133e-2071-4ab8-adfe-f9662c06b889

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Auditors or Administrators or local user group members with execution rights for this command. Auditors can execute this command from the auditor context (auditor>) only.

show hostname

show hostname

Description

Shows the current host name.

Example

Setting and showing the host name:


```

switch# show hostname
switch
switch# config
switch(config)# hostname myswitch
myswitch(config)# show hostname
myswitch

```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show images

show images

Description

Shows information about the software in the primary and secondary images.

Example

Showing the primary and secondary images on a 6100 switch:

```

switch(config)# show images
-----
AOS-CX Primary Image
-----
Version : PL.10.06.0002E
Size    : 243 MB
Date    : 2020-11-25 22:00:47 PST
SHA-256 : 61fe9233b2c842e8ac1731ad46949bd63e269c5c72d69290932ef19c1ebb0730
-----
AOS-CX Secondary Image
-----
Version : PL.10.07.0000E-201-gba0c336
Size    : 271 MB
Date    : 2020-11-25 21:09:08 UTC
SHA-256 : 2fd6c646a8013efcca75729584bbb0fa54604086bad3f46e1c5d4e706b8b30ee

Default Image : primary
Boot Profile Timeout : 2 seconds
-----
Management Module 1/1 (Active)
-----
Active Image      : primary

```

Service OS Version : PL.01.07.0003-internal
BIOS Version : PL.01.0001

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show module

show module

Description

Shows information about installed line modules and management modules.



Although this switch does not have removable modules, this command will still return information about the switch, referring to management modules and line modules.

Usage

Identifies and shows status information about the line modules and management modules that are installed in the switch.

To show the configuration information—if any—associated with that line module slot, use the `show running-configuration` command.

Status is one of the following values:

Active

This is the active management module.

Deinitializing

The switch is being deinitialized.

Diagnostic

The switch is in a state used for troubleshooting.

Down

The switch is physically present but is powered down.

Failed

The switch has experienced an error and failed.

Initializing

The switch is being initialized.

Present

The switch hardware is installed in the chassis.

Ready

The switch is available for use.

Updating

A firmware update is being applied to the switch.

Examples

Showing all installed modules:

```
switch# show module

Management Modules
=====

      Product
Name  Number  Description
-----
1/1   JL678A  6100F 24G 4SFP+ Swch
      Serial
      Number  Status
      -----
      SG0ZKW600P Active (local)

Line Modules
=====

      Product
Name  Number  Description
-----
1/1   JL678A  6100F 24G 4SFP+ Swch
      Serial
      Number  Status
      -----
      SG0ZKW600P Ready
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show running-config

```
show running-config [<FEATURE>] [all]
```

Description

Shows the current nondefault configuration running on the switch. No user information is displayed.

Parameter	Description
<FEATURE>	Specifies the name of a feature. For a list of feature names, enter the <code>show running-config</code> command, followed by a space, followed by a question mark (?).
<i>all</i>	Shows all default values for the current running configuration.

Examples

Showing the current running configuration:

```
switch> show running-config
Current configuration:
!
!Version AOS-CX PL.10.06.0001-346-g56a12a8f4cf15
!export-password: default
ntp enable
!
!
!
!
ssh server vrf default
vlan 1
spanning-tree
spanning-tree instance 1 vlan 1,2,4-10
interface 1/1/1
    no shutdown
    vlan access 1
    portfilter 1/1/2-1/1/3

interface 1/1/2
    no shutdown
    vlan access 1
interface 1/1/3
    no shutdown
    vlan access 1
interface 1/1/4
    no shutdown
    vlan access 1
interface 1/1/5
    no shutdown
    vlan access 1
interface 1/1/6
    no shutdown
    vlan access 1
interface 1/1/7
    no shutdown
    vlan access 1
interface 1/1/8
    no shutdown
    vlan access 1
interface 1/1/9
    no shutdown
    vlan access 1
interface 1/1/10
    no shutdown
    vlan access 1
interface 1/1/11
    no shutdown
    vlan access 1
interface 1/1/12
    no shutdown
    vlan access 1
interface 1/1/13
    no shutdown
    vlan access 1
interface 1/1/14
    no shutdown
    vlan access 1
interface 1/1/15
    no shutdown
    vlan access 1
interface 1/1/16
```

```

no shutdown
vlan access 1
interface vlan 1
ip dhcp
snmp-server vrf default
snmp-server community public
snmp-server host 1.1.1.1 inform version v2c
snmp-server host 1.1.1.1 trap version v2c
snmpv3 context A vrf default
!
!
!
!
!
https-server vrf default

```

Showing the current running configuration in json format:

```

switch> show running-config json
Running-configuration in JSON:
{
  "Monitoring_Policy_Script": {
    "system_resource_monitor_mm1.1.0": {
      "Monitoring_Policy_Instance": {
        "system_resource_monitor_mm1.1.0/system_resource_monitor_
mm1.1.0.default": {
          "name": "system_resource_monitor_mm1.1.0.default",
          "origin": "system",
          "parameters_values": {
            "long_term_high_threshold": "70",
            "long_term_normal_threshold": "60",
            "long_term_time_period": "480",
            "medium_term_high_threshold": "80",
            "medium_term_normal_threshold": "60",
            "medium_term_time_period": "120",
            "short_term_high_threshold": "90",
            "short_term_normal_threshold": "80",
            "short_term_time_period": "5"
          }
        }
      }
    },
    ...
    ...
    ...
    ...

```

Show the current running configuration without default values:

```

switch(config)# show running-config
Current configuration:
!
!Version AOS-CX PL.10.06.0001-346-g56a12a8f4cf15
!export-password: default
!
!
!
!
ssh server vrf default
vlan 1

```

```
spanning-tree
interface 1/1/1
    no shutdown
    vlan access 1
interface 1/1/2
    no shutdown
    vlan access 1
interface 1/1/3
    no shutdown
    vlan access 1
interface 1/1/4
    no shutdown
    vlan access 1
interface 1/1/5
    no shutdown
    vlan access 1
interface 1/1/6
    no shutdown
    vlan access 1
interface 1/1/7
    no shutdown
    vlan access 1
interface 1/1/8
    no shutdown
    vlan access 1
interface 1/1/9
    no shutdown
    vlan access 1
interface 1/1/10
    no shutdown
    vlan access 1
interface 1/1/11
    no shutdown
    vlan access 1
interface 1/1/12
    no shutdown
    vlan access 1
interface 1/1/13
    no shutdown
    vlan access 1
interface 1/1/14
    no shutdown
    vlan access 1
interface 1/1/15
    no shutdown
    vlan access 1
interface 1/1/16
    no shutdown
    vlan access 1
interface vlan 1
    ip dhcp
!
!
!
!
!
https-server vrf default
switch#
switch#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show running-config current-context

show running-config current-context

Description

Shows the current non-default configuration running on the switch in the current command context.

Usage

You can enter this command from the following configuration contexts:

- Any child of the global configuration (`config`) context. If the child context has instances—such as interfaces—you can enter the command in the context of a specific instance. Support for this command is provided for one level below the `config` context. For example, entering this command for a child of a child of the `config` context not supported. If you enter the command on a child of the `config` context, the current configuration of that context and the children of that context are displayed.
- The global configuration (`config`) context. If you enter this command in the global configuration (`config`) context, it shows the running configuration of the entire switch. Use the `show running-configuration` command instead.

Examples

Showing the running configuration for the current interface:

```
switch(config-if)# show running-config current-context
interface 1/1/1
  no shutdown
  description Example interface
vlan access 1
exit
```

Showing the current running configuration for the in-band management interface:

```
switch(config)# interface vlan 1
switch(config-if-vlan)#description IN-BAND Management Interface
switch(config-if-vlan)#ip dhcp
switch(config-if-vlan)#no shutdown
switch(config-if-vlan)#end
switch#
```

Showing the current running configuration for the in-band management interface without DHCP:

```
switch(config)# interface vlan 1
switch(config-if-vlan)#description IN-BAND Management Interface
switch(config-if-vlan)#no ip dhcp
switch(config-if-vlan)#ip address 192.168.10.1/24
switch(config-if-vlan)#no shutdown
switch(config-if-vlan)#end
switch#
```

Showing the running configuration for the external storage share named `nasfiles`:

```
switch(config-external-storage-nasfiles)# show running-config current-context
external-storage nasfiles
  address 192.168.0.1
  vrf default
  username nasuser
  password ciphertext AQBapalKj+XMsZumHEwIc9OR6YcOw5Z6Bh9rV+9ZtKDKzvbaBAAAAB1CTrM=
  type scp
  directory /home/nas
  enable
switch(config-external-storage-nasfiles)#
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config or a child of config. See Usage.	Administrators or local user group members with execution rights for this command.

show startup-config

`show startup-config [json]`

Description

Shows the contents of the startup configuration.



Switches in the `factory-default` configuration do not have a startup configuration to display.

Parameter	Description
<code>json</code>	Display output in JSON format.

Examples

Showing the startup-configuration in JSON format:


```
switch# show startup-config json
Startup configuration:
{
  "AAA_Server_Group": {
    "local": {
      "group_name": "local"
    },
    "none": {
      "group_name": "none"
    }
  },
  ...
}
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show system

show system

Description

Shows general status information about the system.

Usage

CPU utilization represents the average utilization across all the CPU cores.

System Contact, System Location, and System Description can be set with the `snmp-server` command.

Examples

Showing system information:

```
switch(config)# show system
Hostname           : switch
System Description : PL.10.xx.xxxxxx
System Contact     :
System Location    :

Vendor             : Aruba
Product Name       : JL678A 6100 24G 4SFP+ Swch
Chassis Serial Nbr : CN9ZKRD058
Base MAC Address   : f860f0-c91160
AOS-CX Version     : PL.10.xx.xxxxxx

Time Zone          : UTC
```

```
Up Time           : 9 hours, 10 minutes
CPU Util (%)      : 3
Memory Usage (%)  : 15
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show system resource-utilization

```
show system resource-utilization [daemon <DAEMON-NAME>]
```

Description

Shows information about the usage of system resources such as CPU, memory, and open file descriptors.

Parameter	Description
daemon <DAEMON-NAME>	Shows the filtered resource utilization data for the process specified by <DAEMON-NAME> only.
vrf <VRF-NAME>	Specifies the VRF name to be used for communicating with the server. If no VRF name is provided, the default VRF named default is used. NOTE: For a list of daemons that log events, enter <code>show events -d ?</code> from a switch prompt in the manager (#) context.

Examples

Showing all system resource utilization data:

```
switch# show system resource-utilization
System Resources:
Processes: 147
CPU usage(%): 12
Memory usage(%): 13
Open FD's: 4128
mmc-type-a: Endurance utilization = 0-10%, Health = normal
mmc-type-b: Endurance utilization = 0-10%, Health = normal
switch#
```

Showing the resource utilization data for the pmd process:

```
switch# show system resource-utilization daemon pmd
Process           CPU Usage      Memory Usage    Open FD's
-----
pmd                2              1              14
```

Showing resource utilization data when system resource utilization polling is disabled:

```
switch# show system resource-utilization
System resource utilization data poll is currently disabled
```

Showing resource utilization data for a line module:

```
switch# show system resource-utilization module 1/1
System Resource utilization for line card module: 1/1
CPU usage(%): 0
Memory usage(%): 35
Open FD's: 512
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show tech

show tech [basic | <FEATURE>] [local-file]

Description

Shows detailed information about switch features by automatically running the `show` commands associated with the feature. If no parameters are specified, the `show tech` command shows information about all switch features. Technical support personnel use the output from this command for troubleshooting.

Parameter	Description
basic	Specifies showing a basic set of information.
<FEATURE>	Specifies the name of a feature. For a list of feature names, enter the <code>show tech</code> command, followed by a space, followed by a question mark (?).
local-file	Shows the output of the <code>show tech</code> command to a local text file.

Usage

To terminate the output of the `show tech` command, enter **Ctrl+C**.

If the command was not terminated with **Ctrl+C**, at the end of the output, the `show tech` command shows the following:

- The time consumed to execute the command.
- The list of failed `show` commands, if any.

To get a copy of the local text file content created with the `show tech` command that is used with the `local-file` parameter, use the `copy show-tech local-file` command.

Example

Showing the basic set of system information:

```
switch# show tech basic
=====
Show Tech executed on Wed Sep  6 16:50:37 2017
=====
[Begin] Feature basic
=====

*****
Command : show core-dump all
*****
no core dumps are present

...

[End] Feature basic
=====

=====
1 show tech command failed
=====
Failed command:
  1. show boot-history
=====
Show tech took 3.000000 seconds for execution
```

Directing the output of the **show tech basic** command to the local text file:

```
switch# show tech basic local-file
Show Tech output stored in local-file. Please use 'copy show-tech local-file'
to copy-out this file.
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

show usb

show usb

Description

Shows the USB port configuration and mount settings.

Examples

If USB has not been enabled:

```
switch> show usb
Enabled: No
Mounted: No
```

If USB has been enabled, but no device has been mounted:

```
switch> show usb
Enabled: Yes
Mounted: No
```

If USB has been enabled and a device mounted:

```
switch> show usb
Enabled: Yes
Mounted: Yes
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show usb file-system

show usb file-system [<PATH>]

Description

Shows directory listings for a mounted USB device. When entered without the <PATH> parameter the top level directory tree is shown.

Parameter	Description
<PATH>	Specifies the file path to show. A leading "/" in the path is optional.

Usage

Adding a leading "/" as the first character of the <PATH> parameter is optional.

Attempting to enter '.' as any part of the <PATH> will generate an invalid path argument error. Only fully-qualified path names are supported.

Examples

Showing the top level directory tree:

```
switch# show usb file-system
/mnt/usb:
'System Volume Information'  dir1'

/mnt/usb/System Volume Information':
IndexerVolumeGuid  WPSettings.dat

/mnt/usb/dir1:
dir2  test1

/mnt/usb/dir1/dir2:
test2
```

Showing available path options from the top level:

```
switch# show usb file-system /
total 64
drwxrwxrwx 2 32768 Jan 22 16:27 'System Volume Information'
drwxrwxrwx 3 32768 Mar  5 15:26 dir1
```

Showing the contents of a specific folder:

```
switch# show usb file-system /dir1
total 32
drwxrwxrwx 2 32768 Mar  5 15:26 dir2
-rwxrwxrwx 1      0 Feb  5 18:08 test1

switch# show usb file-system dir1/dir2
total 0
-rwxrwxrwx 1 0 Feb  6 05:35 test2
```

Attempting to enter an invalid character in the path:

```
switch# show usb file-system dir1/../../../../
Invalid path argument
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

show version

show version

Description

Shows version information about the network operating system software, service operating system software, and BIOS.

Example

Showing version information:

```
switch(config)# show version
-----
AOS-CX
(c) Copyright 2017-2020 Hewlett Packard Enterprise Development LP
-----
Version       : PL.10.xx.xxxxx
Build Date    : 2020-12-06 22:13:46 UTC
Build ID      : AOS-CX:PL.10.xx.xxxxx:9e8bf51170a6:202012062115
Build SHA     : 9e8bf51170a602370f12e0bde814e8d8f49bf706
Active Image  : secondary

Service OS Version : PL.10.xx.xxxxx-internal
BIOS Version      : PL.01.0002
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Operator (>) or Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

system resource-utilization poll-interval

system resource-utilization poll-interval <SECONDS>

Description

Configures the polling interval for system resource information collection and recording such as CPU and memory usage.

Parameter	Description
<SECONDS>	Specifies the poll interval in seconds. Range: 10-3600. Default: 10.

Example

Configuring the system resource utilization poll interval:

```
switch(config)# system resource-utilization poll-interval 20
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	config	Administrators or local user group members with execution rights for this command.

top cpu

top cpu

Description

Shows CPU utilization information.

Example

Showing top CPU information:

```
switch# top cpu
top - 09:42:55 up 3 min, 3 users, load average: 3.44, 3.78, 1.70
Tasks: 76 total, 2 running, 74 sleeping, 0 stopped, 0 zombie
%Cpu(s): 31.4 us, 32.7 sy, 0.5 ni, 34.4 id, 04. wa, 0.0 hi, 0.6 si, 0.0 st
KiB Mem : 4046496 total, 2487508 free, 897040 used, 661948 buff/cache
KiB Swap: 0 total, 0 free, 0 used, 2859196 avail Mem

  PID USER      PRI  NI   VIRT   RES   SHR S  %CPU  %MEM     TIME+ COMMAND
...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

top memory

top memory

Description

Shows memory utilization information.

Example

Showing top memory:

```
switch> top memory
top - 09:42:55 up 3 min, 3 users, load average: 3.44, 3.78, 1.70
Tasks: 76 total, 2 running, 74 sleeping, 0 stopped, 0 zombie
%Cpu(s): 31.4 us, 32.7 sy, 0.5 ni, 34.4 id, 04. wa, 0.0 hi, 0.6 si, 0.0 st
KiB Mem : 4046496 total, 2487508 free, 897040 used, 661948 buff/cache
KiB Swap: 0 total, 0 free, 0 used, 2859196 avail Mem

  PID USER      PRI  NI   VIRT   RES   SHR S  %CPU %MEM     TIME+ COMMAND
...
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

usb

usb
no usb

Description

Enables the USB ports on the switch. This setting is persistent across switch reboots and management module failovers. Both active and standby management modules are affected by this setting.

The `no` form of this command disables the USB ports.

Example

Enabling USB ports:

```
switch(config)# usb
```

Disabling USB ports when a USB drive is mounted:

```
switch(config)# no usb
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	<code>config</code>	Administrators or local user group members with execution rights for this command.

usb mount | unmount

```
usb {mount | unmount}
```

Description

Enables or disables the inserted USB drive.

Parameter	Description
<code>mount</code>	Enables the inserted USB drive.
<code>unmount</code>	Disables the inserted USB drive in preparation for removal.

Usage

If USB has been enabled in the configuration, the USB port on the active management module is available for mounting a USB drive. The USB port on the standby management module is not available.

An inserted USB drive must be mounted each time the switch boots or fails over to a different management module.

A USB drive must be unmounted before removal.

The supported USB file systems are FAT16 and FAT32.

Examples

Mounting a USB drive in the USB port:

```
switch# usb mount
```

Unmounting a USB drive:

```
switch# usb unmount
```

Command History

Release	Modification
10.07 or earlier	--

Command Information

Platforms	Command context	Authority
All platforms	Manager (#)	Administrators or local user group members with execution rights for this command.

Accessing Aruba Support

Aruba Support Services	https://www.arubanetworks.com/support-services/
Aruba Support Portal	https://asp.arubanetworks.com/
North America telephone	1-800-943-4526 (US & Canada Toll-Free Number) +1-408-754-1200 (Primary - Toll Number) +1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working)
International telephone	https://www.arubanetworks.com/support-services/contact-support/

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

Other useful sites

Other websites that can be used to find information:

Airheads social forums and Knowledge Base	https://community.arubanetworks.com/
AOS-CX Switch Software Documentation Portal	https://www.arubanetworks.com/techdocs/AOS-CX/help_portal/Content/home.htm

Aruba Hardware Documentation and Translations Portal	https://www.arubanetworks.com/techdocs/hardware/DocumentationPortal/Content/home.htm
Aruba software	https://asp.arubanetworks.com/downloads
Software licensing	https://lms.arubanetworks.com/
End-of-Life information	https://www.arubanetworks.com/support-services/end-of-life/
Aruba Developer Hub	https://developer.arubanetworks.com/

Accessing Updates

You can access updates from the Aruba Support Portal or the HPE My Networking Website.

Aruba Support Portal

<https://asp.arubanetworks.com/downloads>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found:

My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>

Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

Warranty Information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

Regulatory Information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

Documentation Feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback-switching@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.