

AOS-CX 10.06 Monitoring Guide

8400 Switch Series



Hewlett Packard
Enterprise

Part Number: 5200-7714
Published: November 2020
Edition: 1

Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

Acknowledgments

Intel®, Itanium®, Optane™, Pentium®, Xeon®, Intel Inside®, and the Intel Inside logo are trademarks of Intel Corporation in the U.S. and other countries.

Microsoft® and Windows® are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Adobe® and Acrobat® are trademarks of Adobe Systems Incorporated.

Java® and Oracle® are registered trademarks of Oracle and/or its affiliates.

UNIX® is a registered trademark of The Open Group.

All third-party marks are property of their respective owners.



Chapter 1 About this document	7
Applicable products	7
Latest version available online	7
Command syntax notation conventions	7
About the examples	8
Identifying switch ports and interfaces	8
Identifying modular switch components	9
 Chapter 2 Aruba 8400 Switch Series member, slot, and port notation	 10
 Chapter 3 Monitoring hardware through visual observation	 12
Confirming normal operation of the switch by reading LEDs	12
Detecting if the switch is not ready for a failover event	13
Finding faulted components using the switch LEDs	14
 Chapter 4 Aruba 8400 Switch Series LEDs	 15
Chassis LEDs	15
Chassis LED behavior	15
Fabric module and fan module LEDs	16
Fabric module LED behavior	17
Fan module LED behavior	17
Line module LEDs	18
Line module LED behavior	18
Management module LEDs, ports, and buttons	20
Management module LED behavior	22
Power supply LEDs	25
Power supply LED behavior	25
Rear panel LEDs	26
Rear panel LED behavior	27
LED states	28
 Chapter 5 Boot commands	 30
boot fabric-module	30
boot line-module	31
boot management-module	31
boot set-default	33
boot system	33
show boot-history	35
 Chapter 6 Switch system and hardware commands	 38
bluetooth disable	38
bluetooth enable	38
clear events	39

clear ip errors.....	40
domain-name.....	40
fabric admin-state.....	41
hostname.....	42
led locator.....	42
module admin-state.....	43
module product-number.....	44
mtrace.....	46
show bluetooth.....	47
show boot-history.....	48
show capacities.....	50
show capacities-status.....	51
show core-dump.....	52
show domain-name.....	54
show environment fan.....	55
show environment led.....	57
show environment power-consumption.....	58
show environment power-supply.....	59
show environment rear-display-module.....	61
show environment temperature.....	61
show events.....	63
show fabric.....	65
show hostname.....	66
show images.....	67
show ip errors.....	68
show module.....	69
show running-config.....	72
show running-config current-context.....	75
show startup-config.....	76
show system.....	77
show system error-counter-monitor.....	78
show system resource-utilization.....	80
show tech.....	81
show usb.....	82
show usb file-system.....	83
show version.....	84
system error-counter-monitor.....	85
system error-counter-monitor poll-interval.....	85
system resource-utilization poll-interval.....	86
top cpu.....	86
top memory.....	87
usb.....	87
usb mount unmount.....	88

Chapter 7 External storage..... 90

External storage commands.....	90
address.....	90
directory.....	91
disable.....	92
enable.....	92
external-storage.....	93
password.....	93
show external-storage.....	94

show running-config external-storage.....	95
type.....	95
username.....	96
vrf.....	97
Chapter 8 IP-SLA.....	98
IP-SLA guidelines.....	98
Limitations with VoIP SLAs.....	99
IP-SLA commands.....	99
http.....	99
icmp-echo.....	100
ip-sla.....	101
ip-sla responder.....	102
show ip-sla responder.....	103
show ip-sla responder results.....	103
show ip-sla <SLA-NAME>.....	104
start-test.....	106
stop-test.....	106
tcp-connect.....	107
udp-echo.....	108
udp-jitter-voip.....	109
vrf.....	110
Chapter 9 Mirroring.....	111
Mirroring and sFlow.....	111
Mirror statistics.....	112
Classifier policies and mirroring sessions.....	112
Mirroring commands.....	113
clear mirror.....	113
comment.....	114
copy tshark-pcap.....	114
destination cpu.....	115
destination interface.....	116
destination tunnel.....	117
diagnostic.....	118
disable.....	119
enable.....	119
mirror session.....	120
show mirror.....	121
source interface.....	123
Chapter 10 Monitoring a device by using SNMP.....	125
Chapter 11 Split hydra cable support	126
Limitations with split hydra cable support.....	126
Split hydra cable support commands.....	126
split.....	126
Chapter 12 Aruba AirWave.....	129
SNMP support and AirWave.....	129

Supported features with AirWave and the AOS-CX switch.....	130
Configuring the AOS-CX switch to be monitored by AirWave.....	130
logging.....	131
snmp-server community.....	132
snmp-server host.....	133
snmp-server vrf.....	135
snmpv3 context.....	135
snmpv3 user.....	136

Chapter 13 Support and other resources..... 139

Accessing Aruba Support.....	139
Accessing updates.....	139
Warranty information.....	140
Regulatory information.....	140
Documentation feedback.....	140

This document describes features of the AOS-CX network operating system. It is intended for administrators responsible for installing, configuring, and managing Aruba switches on a network.

Applicable products

This document applies to the following products:

Aruba 8400 Switch Series (JL375A, JL376A)

Latest version available online

Updates to this document can occur after initial publication. For the latest versions of product documentation, see the links provided in **Support and other resources**.

Command syntax notation conventions

Convention	Usage
<code>example-text</code>	Identifies commands and their options and operands, code examples, filenames, pathnames, and output displayed in a command window. Items that appear like the example text in the previous column are to be entered exactly as shown and are required unless enclosed in brackets ([]).
example-text	In code and screen examples, indicates text entered by a user.
Any of the following: <code><example-text></code> <code><example-text></code> <i>example-text</i> <i>example-text</i>	Identifies a placeholder—such as a parameter or a variable—that you must substitute with an actual value in a command or in code: - For output formats where italic text cannot be displayed, variables are enclosed in angle brackets (< >). Substitute the text—including the enclosing angle brackets—with an actual value. - For output formats where italic text can be displayed, variables might or might not be enclosed in angle brackets. Substitute the text including the enclosing angle brackets, if any, with an actual value.
	Vertical bar. A logical OR that separates multiple items from which you can choose only one. Any spaces that are on either side of the vertical bar are included for readability and are not a required part of the command syntax.
{ }	Braces. Indicates that at least one of the enclosed items is required.

Table Continued

Convention	Usage
[]	Brackets. Indicates that the enclosed item or items are optional.
... or	Ellipsis:
...	- In code and screen examples, a vertical or horizontal ellipsis indicates an omission of information. - In syntax using brackets and braces, an ellipsis indicates items that can be repeated. When an item followed by ellipses is enclosed in brackets, zero or more items can be specified.

About the examples

Examples in this document are representative and might not match your particular switch or environment. The slot and port numbers in this document are for illustration only and might be unavailable on your switch.

Understanding the CLI prompts

When illustrating the prompts in the command line interface (CLI), this document uses the generic term `switch`, instead of the host name of the switch. For example:

```
switch>
```

The CLI prompt indicates the current command context. For example:

```
switch>
```

Indicates the operator command context.

```
switch#
```

Indicates the manager command context.

```
switch (CONTEXT-NAME)#
```

Indicates the configuration context for a feature. For example:

```
switch(config-if) #
```

Identifies the interface context.

Variable information in CLI prompts

In certain configuration contexts, the prompt may include variable information. For example, when in the VLAN configuration context, a VLAN number appears in the prompt:

```
switch(config-vlan-100) #
```

When referring to this context, this document uses the syntax:

```
switch(config-vlan-<VLAN-ID>) #
```

Where `<VLAN-ID>` is a variable representing the VLAN number.

Identifying switch ports and interfaces

Physical ports on the switch and their corresponding logical software interfaces are identified using the format:

```
member/slot/port
```


On the 8400 Switch Series

- *member*: Always 1. VSF is not supported on this switch.
- *slot*: Specifies physical location of a module in the switch chassis.
 - Management modules are on the front of the switch in slots 1/5 and 1/6.
 - Line modules are on the front of the switch in slots 1/1 through 1/4, and 1/7 through 1/10.
- *port*: Physical number of a port on a line module

For example, the logical interface 1/1/4 in software is associated with physical port 4 in slot 1 on member 1.

Identifying modular switch components

- Power supplies are on the front of the switch behind the bezel above the management modules. Power supplies are labeled in software in the format: *member/power supply*:
 - *member*: 1.
 - *power supply*: 1 to 4.
- Fans are on the rear of the switch and are labeled in software as: *member/tray/fan*:
 - *member*: 1.
 - *tray*: 1 to 4.
 - *fan*: 1 to 4.
- Fabric modules are not labeled on the switch but are labeled in software in the format: *member/module*:
 - *member*: 1.
 - *member*: 1 or 2.
- The display module on the rear of the switch is not labeled with a member or slot number.

The software notation for describing member, slot, and port information depends on the switch hardware.

The physical interfaces on the Aruba 8400 Switch Series use the format:

member/slot/port

member

Specifies the chassis number. In this release of the software, the value of *member* is always 1.

slot

Specifies physical location in the switch chassis.

port

Specifies the physical port on the module.

The slot numbers are unique to each type of component—in contrast to being unique within a chassis.

Line Modules and Management Modules


Line modules are on the front of the switch in slots 1/1 through 1/4 and 1/7 through 1/10.

The number of ports depend on the line module. Line module ports are labeled in software as port or interface, depending on the context.

For example, `interface 1/1/1` is the logical interface associated with the physical interface member 1, slot 1, port 1.

Management modules are on the front of the switch in slots 1/5 and 1/6.

Figure 1: Aruba 8400 Switch Series line module and management module slots

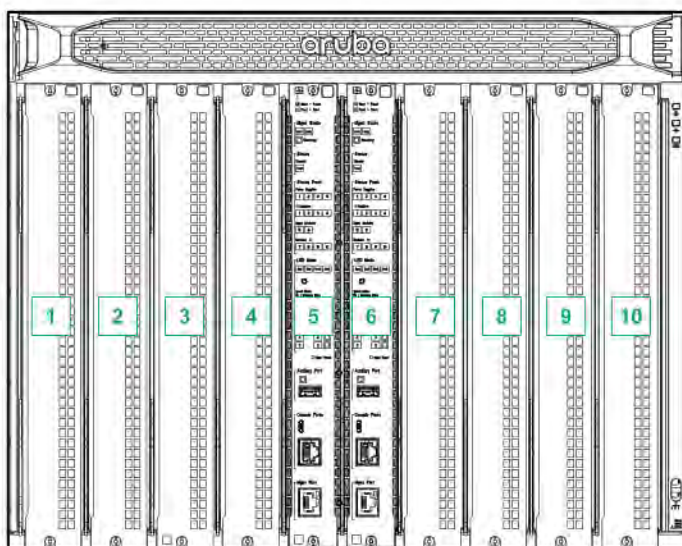

Power supplies

Power supplies are on the front of the switch behind the bezel above the line modules and management modules. Power supplies are labeled in software as Member/PSU: 1/1 through 1/4.

Fan trays

Fan trays are on the rear of the switch and are labeled in software as Member/Tray: 1/1 through 1/3.

Fans

Fans are on the rear of the switch in fan trays and are labeled in software as Member/Tray/Fan:

- 1/1/1 through 1/1/6
- 1/2/1 through 1/2/6
- 1/3/1 through 1/3/6

Fabric modules

Fabric modules are on the rear of the switch, behind the fan trays, in slots 1/1 through 1/3.

Rear display module

The rear display module is on the rear of the switch and is not labeled with a member or slot number.

Confirming normal operation of the switch by reading LEDs

This task describes using the switch LEDs to confirm that the switch is operating normally.

Procedure

1. Quick check: Verify that the chassis has power and there are no fault conditions.
On the front of the switch, verify that the states of the following LEDs are On Green:
 - Power
 - Health
2. Verify that the Health LEDs of all installed line modules are On Green.
3. Verify that the Health LEDs of all installed management modules are On Green.
4. Verify that the network ports are operating normally.
 - a. On the active management module, check the Status Front section. Verify that each LED that indicates a line module is in one of the following states:
 - On Green (normal operation)
 - Off (no line module installed)
 - b. On each line module, verify that each port LED is in one of the following states:
 - On Green, Half-Bright Green, or Flickering Green (normal operation)
 - Off (no cable connected or port off by default in config)
5. Verify that the power supplies are operating normally.
 - a. On the active management module, check the Status Front section. Verify that each LED that indicates a power supply is in one of the following states:
 - On Green (normal operation)
 - Off (no power supply installed)
 - b. On each power supply, verify that LEDs are in the following states:
 - Power LED: On Green
 - Fault LED: Off

6. Verify that the rear components are operating normally by checking the Status Rear section of the active management module:
 - a. Verify that the LEDs for the fabric modules are in one of the following states:
 - On Green (normal operation)
 - Off (component not installed)
 - b. Verify that the LEDs for the fan trays and fans are On Green.
7. Verify that the standby management module is ready to take over as the active management module.
On the standby management module, verify the states of the following LEDs:
 - Health LED is On Green.
 - Management state standby (Stby) LED is On Green.

Detecting if the switch is not ready for a failover event

This task describes using the switch LEDs to detect if the switch is not ready for the loss of a fabric module or for a failover from the active management module to the standby management module.



NOTE: Although you can detect power supply failures by viewing the LEDs, you must use software commands to determine if the power supply redundancy is sufficient to power the chassis if a power supply fails.

Procedure

1. Detect if the standby management module is shut down.
If the standby management module is shut down, the LED states are as follows:
 - The standby management module health LED is Off.
 - The standby management state active (Actv) LED is Off.
 - The standby management state standby (Stby) LED is Off.
 - On the active management module in the Status Front Management Modules section, the LED for the standby management module is Off. For example, if the active management module is Management Module LED 5, Management Modules LED 6 is Off.
2. Detect if the standby management module is in a transient state.
If the standby management module is booting, updating, or in another transient state, the LED states are as follows:
 - The standby management module health LED is Slow Flash Green when the service operating system is running or during an operating system update.
 - The standby management module Booting LED is Slow Flash Green when the ArubaOS-CX operating system is booting.

- The standby management state active (Actv) LED is Off.
- The standby management state standby (Stby) LED is Off.
- On the active management module in the Status Front Management Modules section, the LED for the standby management module is Slow Flash Green.

3. Detect if a fabric module is shut down or not present.

If a fabric module is shut down or not present, the LED states are as follows:

- On the active management module, in the Status Rear section, the LED for the fabric module is Off.
- On the rear display module, the LED for the fabric module is Off.
- On the fabric module, the health LED is Off. However, the fabric module is behind fan 1 and is not directly visible.

Finding faulted components using the switch LEDs

This task describes using the switch LEDs to find components that are in a fault condition.



NOTE: All green LEDs—except for chassis power LEDs and the Usr1 LED—are off when the LED mode is set to Light Faults (The Usr1 LED of the LED Mode section of the active management module is On Green and the default behavior for the Usr1 LED is being used.).

Procedure

1. Find the switch that has the fault condition, which is indicated by a chassis health LED in the state of Slow Flash Orange.

The chassis health LED is located on the front of the switch and on the rear panel of the switch.

2. If you are at the back of the switch, on the rear panel, look for LEDs that are in the Slow Flash Orange state:

The Status Rear area has LEDs for power supplies, fabric modules, fan trays, and fans. The number on the LED represents the unit number of the component.

If the only LED in a state of Slow Flash Orange is the Chassis health LED, go to the front of the switch.

3. At the front of the switch, on the active management module, look for LEDs that are in the Slow Flash Orange state:

- The Status Front area has LEDs for power supplies, line and fabric modules, and management modules. The number on the LED indicates the slot number of the component.
- The Status Rear area has LEDs for fabric modules and fan trays, with a single LED for all the fans in the fan tray. The number on the LED represents the slot or bay number of the component.


4. Use the number indicated by the LED that is flashing to locate the slot that contains the faulted component.

The fabric modules are located behind the fan trays, and the fabric module number corresponds to the fan tray number.

5. At the front of the switch, on line modules, look for LEDs that are in the Slow Flash Orange state:

Module LEDs and Port LEDs indicate faults if their states are Slow Flash Orange.

Chassis LEDs

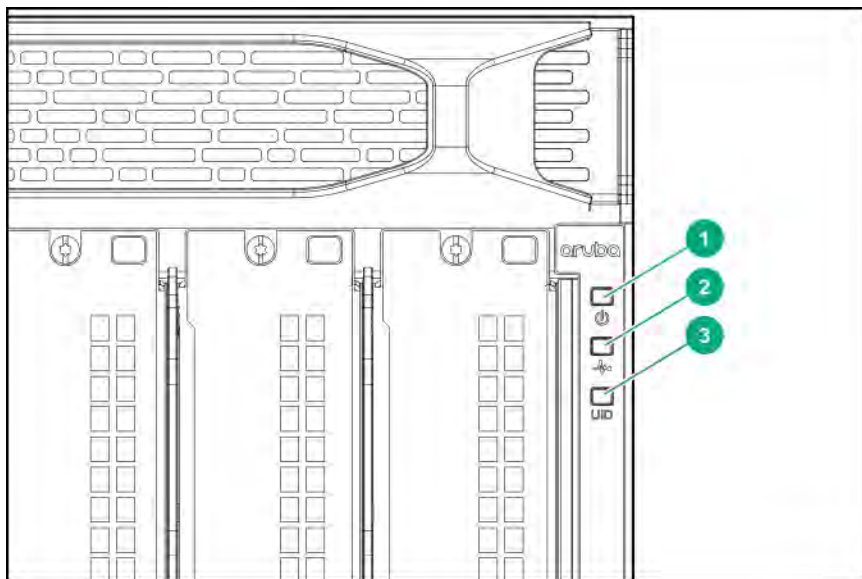

LED	
1	Chassis power LED
2	Chassis health LED
3	Unit identification (UID)

Chassis LED behavior

Chassis power LED

LED state	Meaning
Off	No power to chassis
On Green	Powered on


Chassis health LED

LED state	Meaning
Off	No power to chassis
On Green	Normal operation
Slow Flash Green	Booting
Slow Flash Orange	Fault condition somewhere in the system

Chassis UID (unique identifier) LED

LED state	Meaning
Off	Not activated
On Blue	Location aid
Slow Flash Blue	Location aid

Fabric module and fan module LEDs

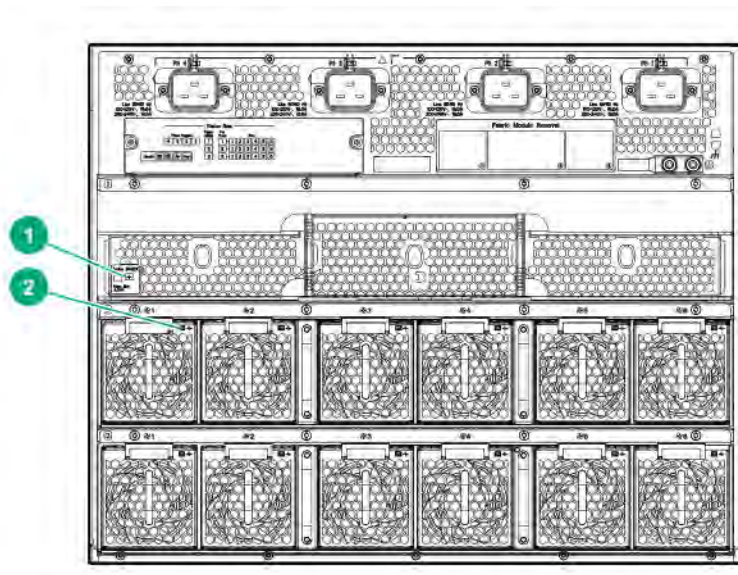

LED	
1	Fabric module LEDs Fabric module 1 shown with fan tray 1 and fan modules removed. Fabric modules are located behind the fan trays. Fabric module LEDs are visible if the entire fan tray is removed or if Fan 1 is removed from the fan tray.
2	Fan Module LEDs

Fabric module LED behavior

The fabric module health LED is not directly visible when Fan 1 is in place. The purpose of the health ID for fabric modules is to allow you to ensure that the module is shut down and ready for removal.

Fabric module health LED


LED state	Meaning
Off	Powered down, ready for removal
On Green	Normal operation
Slow Flash Green	Booting or initializing
Slow Flash Orange	Fault condition
Fast Flash Orange	Hardware (ASIC) mismatch

Fan module LED behavior

Fan module health LED

LED state	Meaning
Off	Shut down or not operating
On Green	Normal Operation
Slow Flash Orange	Fault condition

Line module LEDs

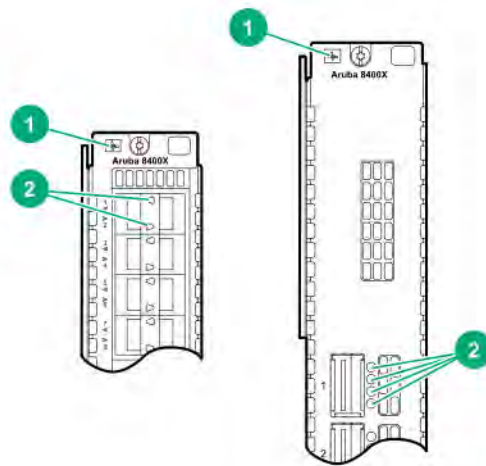

LED	
1	Line module health LED
2	Line module port LEDs

Line module LED behavior

Line module Health LED

LED state	Meaning
Off	Powered down, ready for removal
On Green	Ready or normal operation
Slow Flash Green	Booting or initializing
Slow Flash Orange	Fault condition
Fast Flash Orange	Hardware (ASIC) mismatch

Line module port LEDs when LED mode is Link/Activity

LED behavior for port LEDs is set by LED Mode button on management module.

LED State	Meaning
Off	Port is disabled, not connected or not receiving a link indication from the connected device
Half-Bright Green	Port is enabled and receiving a link indication from the connected device

Table Continued

LED State	Meaning
Switching between Half-Bright and Full-Bright Green	Port is actively transferring data
On Green	Port is at high utilization
Slow Flash Orange	Port is in a fault condition

Line module port LEDs when LED mode is Spd


LED State	Meaning
Off	Port is disabled, not connected or not receiving a link indication from the connected device
On Green	Port is operating at maximum port rate
Slow Flash Green	Port is operating below maximum port rate
Slow Flash Orange	Fault condition

Line module port LEDs when LED mode is Usr1 (light faults)

This mode is primarily to assist users who cannot discern between green and orange LEDs. It is also helpful to users who want to locate an occurring fault quickly.

LED State	Meaning
Off	All Green LEDs (except the chassis power and Usr1 LEDs) are Off in this LED mode
Slow Flash Orange	Fault condition


Management module LEDs, ports, and buttons

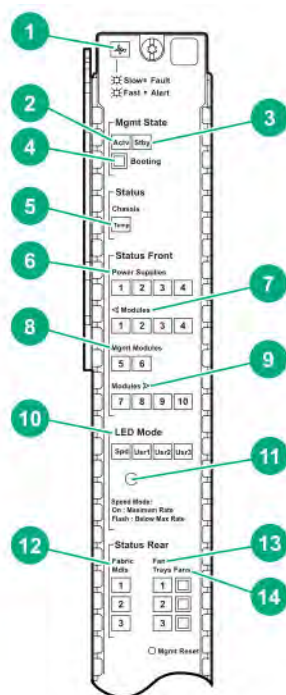

LED	
1	Management module health LED
2	Active state (Actv)
3	Standby state (Stby)
4	Booting
5	Chassis temperature status (Temp)
6	Power supply status (1 2 3 4)
7	Line modules status (1 2 3 4) Module slots 1 - 4
8	Management module status (5 6) Module slots 5 and 6
9	Line modules status (7 8 9 10) Module slots 7 - 10

Table Continued

LED	
10	Line module port LED State (Spd) (Usr1) (Usr2) (Usr3) selected by LED Mode button.
11	LED Mode button Changes display of the line module port LEDs from the default Link/Activity behavior to cycle through the speed (Spd) and user (Usr) options
12	Fabric module status (1 2 3)
13	Fan tray status (1 2 3)
14	Fans (fan modules 1 - 6 in indicated fan tray)

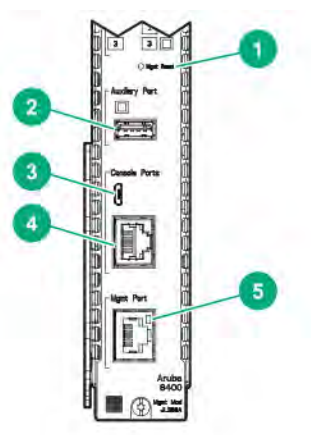

LED	
1	Mgmt Reset button Recessed button used to reset the selected management module
2	Auxiliary port
3	USB Micro-B Console Port
4	Serial Console Port (RJ-45)
5	Mgmt Port (OOBM Port) Activity/Link LED

Management module LED behavior

Management module health LED

LED state	Meaning
Off	Shut down or ready for removal
On Green	Booting the ArubaOS-CX operating system, ready, or normal operation
Slow Flash Green	Booting the BIOS or service operating system, or updating firmware
Slow Flash Orange	Management module fault
Fast Flash Orange	Software (NOS) mismatch

Chassis temperature status (Temp) LED

LED state	Meaning
On Green	Temperature at or below rating
Slow Flash Orange	Environment air temperature or individual component temperature above rating

Management state LEDs

Standby management modules do not show component status LEDs.

Table 1: *Actv (active state) and Stby (standby state) LEDs*

LED State	Active state (Actv)	Standby state (Stby)
On Green (only one on at a time)	This module is the active management module and it is ready.	This module is the standby management module and it is ready.
Both LEDs Off	This management module is not ready (booting or shut down).	

Table 2: *Booting*

LED state	Meaning
Off	Operating system has not started booting Management module is ready
Slow Flash Green	ArubaOS-CX operating system is booting

Status Front LEDs

Table 3: *Power Supplies: 1-4*

LED state	Meaning
Off	Not present
On Green	Operating normally
Slow Flash Orange	Fault condition

Table 4: *Line Modules: 1-4 and 7-10*

LED state	Meaning
Off	Powered down, ready for removal
On Green	Ready or normal operation
Slow Flash Green	Booting or initializing
Slow Flash Orange	Fault condition
Fast Flash Orange	Hardware (ASIC) mismatch

Table 5: *Management Modules: 5-6*

LED state	Meaning
Off	Not present or module is shut down and ready for removal
On Green	Operating normally

Status Rear LEDs

Table 6: *Fabric Modules: 1-3*

LED state	Meaning
Off	Powered down, ready for removal
On Green	Normal operation
Slow Flash Green	Booting or initializing
Slow Flash Orange	Fault condition
Fast Flash Orange	Hardware (ASIC) mismatch

Table 7: *Fan Trays: 1-3*

LED state	Meaning
On Green	Operating normally
Slow Flash Orange	Fault condition or not present

Table 8: *Fans: 1-6 in each fan tray*

LED state	Meaning
On Green	Operating normally
Slow Flash Orange	One or more fans in the given fan tray is in a fault condition or is not present

LED Mode

The LED Mode button changes the behavior of port LEDs from the default mode to cycle through various other settings. The selected LED mode reverts to the default mode after 10 minutes. The LED modes are the following:

Default mode

In the default mode:

- All LEDs in the LED Mode section are off.
- Port LED behavior indicates link and activity without rate indications.
- If a line module port is in a fault condition, its LED changes from Flashing Green (indicating activity) to Slow Flash Orange (fault condition).

Speed mode

In the speed mode:

- The Spd (Speed) LED is On Green.
- Port LED behavior indicates link speed. A Port LED is On Green when the link is at maximum speed and Flashing Green when the link is below maximum speed.

User 1 Mode

The behavior for the Usr1 (User 1) mode is to Light Faults. Use this mode to assist users who cannot discern between Green and Orange LEDs or who want to locate an occurring fault quickly.

In Light Faults mode:

- The Usr1 (User 1) LED is On Green.
- All other Green LEDs except the chassis power LEDs are Off.
- LEDs that indicate a fault condition are Slow Flash Orange or Fast Flash Orange.


Auxiliary Port LED

Off (Not used).

Management Port LEDs

LED state	Meaning
Off	Port is disabled, not connected or not receiving a link indication from the connected device
Half-Bright Green	Port is enabled and receiving a link indication from the connected device
Switching between Half-Bright and Full-Bright Green	Port is actively transferring data
On Green	Port is at high utilization

Power supply LEDs

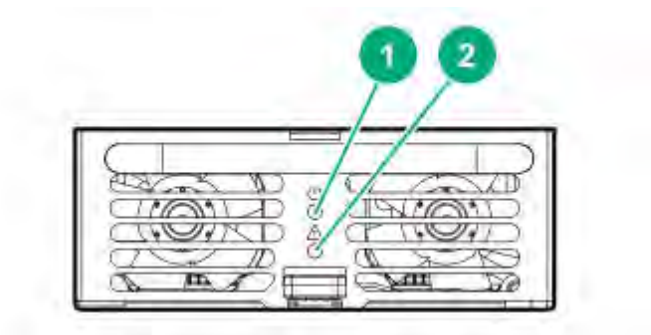

LED	
1	Power LED (green)
2	Fault LED (orange)

Power supply LED behavior


Power supply LEDs

Power LED state	Fault LED state	Power supply condition
On Green	Off	Normal operation
Off	Off	No AC power to power supply

Table Continued

Power LED state	Fault LED state	Power supply condition
Flashing Green	Off	AC power is present, but the power supply is not supplying power to the chassis
On Green	Flashing Orange	Power limit exceeded
Off	On Orange	Temperature limit exceeded or abnormal output detected

Rear panel LEDs

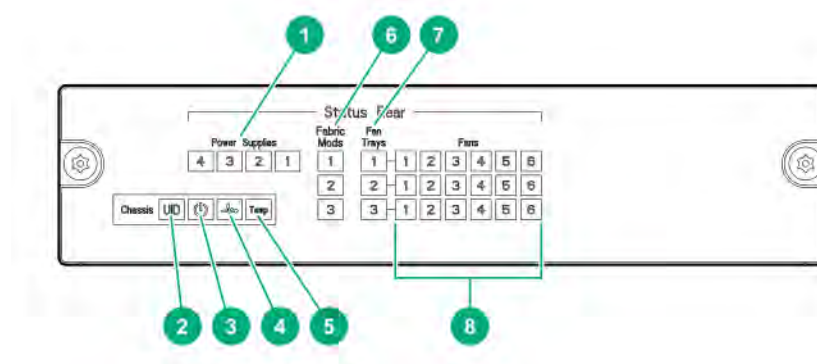

LED	
1	Power supply status (1 2 3)
2	Unit identification (UID)
3	Chassis power LED
4	Chassis health LED
5	Chassis temperature status (Temp)
6	Fabric modules
7	Fan tray status (1 2 3)
8	Fan status each fan tray (1 2 3 4 5 6)

Table Continued

LED	
Not shown*	Fan health (Health LED) (*For a given fan module, this LED appears to the right of the module release lever.)
Not shown**	Fabric Module Health (Health Icon) (**To view this LED for a given fabric module (1 through 3), remove the first (leftmost) fan module from the fan tray slot in which the fabric module is installed.)

Rear panel LED behavior

Chassis Power LED

LED state	Meaning
Off	No power to chassis
On Green	Powered on

Chassis Health LED

LED state	Meaning
On Green	Normal operation
Slow Flash Green	Booting
Slow Flash Orange	Fault condition somewhere in the system

Chassis Unique Identifier (UID) LED

LED state	Meaning
Off	Not activated
On Blue	Location aid
Slow Flash Blue	Location aid

Chassis temperature status (Temp) LED

LED state	Meaning
On Green	Temperature at or below rating
Slow Flash Orange	Environment air temperature or individual component temperature above rating

Status Rear LEDs

Table 9: *Fabric Modules: 1-3*

LED state	Meaning
Off	Powered down, ready for removal
On Green	Normal operation
Slow Flash Green	Booting or initializing
Slow Flash Orange	Fault condition
Fast Flash Orange	Hardware (ASIC) mismatch

Table 10: *Fan Trays: 1-3*

LED state	Meaning
On Green	Operating normally
Slow Flash Orange	Fault condition or not present

Table 11: *Fans: 1-6 in each fan tray*

LED state	Meaning
On Green	Operating normally
Slow Flash Orange	Fan is in a fault condition or is not present

LED states

Off

No discernable light emitted.

On

No discernable intensity variation, full-bright.

Activity flicker

The port LED switches to full-bright to indicate that traffic is passing through the port. If the port LED is steady full-bright, the port utilization is continuous.

Half-bright

No discernable intensity variation, intensity is 50% of full-bright.

Slow Flash

0.8s on / 0.8s off

Fast Flash

0.4s on / 0.4s off

boot fabric-module

Syntax

```
boot fabric-module <SLOT-ID>
```

Description

Reboots the specified fabric module.

Command context

Manager (#)

Parameters

<SLOT-ID>

Specifies the member and slot of the module in the format `member/slot`. For example, to specify the module in member 1 slot 3, enter 1/3.

Authority

Administrators or local user group members with execution rights for this command.

Usage

The `boot fabric-module` command reboots the specified fabric module. Traffic performance is affected while the module is down.

If the specified module is the only fabric module in an up state, rebooting that module stops traffic switching between line modules and the line modules power down. The line modules power up when one fabric module returns to an up state.

This command is valid for fabric modules only.

Examples

Rebooting the fabric module in slot 1/3 when auto-confirm is not enabled:

```
switch# boot fabric-module 1/3
This command will reboot the specified fabric module. Traffic performance may
be affected while the module is down. Rebooting the last fabric module will
stop traffic switching between line modules.
Do you want to continue (y/n)? y

switch#
```

Rebooting the fabric module in slot 1/1 when auto-confirm is enabled:

```
switch# boot fabric-module 1/3
This command will reboot the specified fabric module. Traffic performance may
be affected while the module is down. Rebooting the last fabric module will
stop traffic switching between line modules.
```

```
Do you want to continue (y/n) y (auto-confirm)
switch#
```

boot line-module

Syntax

```
boot line-module <SLOT-ID>
```

Description

Reboots the specified line module.

Command context

Manager (#)

Parameters

<SLOT-ID>

Specifies the member and slot of the module in the format `member/slot`. For example, to specify the module in member 1 slot 3, enter `1/3`.

Authority

Administrators or local user group members with execution rights for this command.

Usage

Reboots the specified line module. Any traffic for the switch passing through the affected module (SSH, TELNET, and SNMP) is interrupted. It can take up to 2 minutes to reboot the module. During that time, you can monitor progress by viewing the event log.

This command is valid for line modules only.

Examples

Reloading the module in slot 1/1:

```
switch# boot line-module 1/1
This command will reboot the specified line module and interfaces on this
module will not send or receive packets while the module is down. Any
traffic passing through the line module will be interrupted. Management
sessions connected through the line module will be affected. It might take
up to 2 minutes to complete rebooting the module. During that time, you can
monitor progress by viewing the event log.
Do you want to continue (y/n)? y
switch#
```

boot management-module

Syntax

```
boot management-module {active | standby | <SLOT-ID>}
```

Description

Reboots the specified management module. Choose the management module to reboot by role (active or standby) or by slot number.

Command context

Manager (#)

Parameters

active

Selects the active management module.

standby

Selects the standby management module.

<SLOT-ID>

Specifies the member and slot of the management module in the format `member/slot`. For example, to specify the module in member 1 slot 5, enter `1/5`.

Authority

Administrators or local user group members with execution rights for this command.

Usage

This command reboots a single management module in a chassis. Choose the management module to reboot by role (active or standby) or by slot number.

You can use the `show images` command to show information about the primary and secondary system images.

If you reboot the active management module and the standby management module is available, the active management module reboots and the standby management module becomes the active management module.

If you reboot the active management module and the standby management module is not available, you are warned, you are prompted to save the configuration, and you are prompted to confirm the operation.

If you reboot the standby management module, the standby management module reboots and remains the standby management module.

If you attempt to reboot a management module that is not available, the `boot` command is aborted.

Saving the configuration is not required. However, if you attempt to save the configuration and there is an error during the save operation, the `boot` command is aborted.



NOTE: Hewlett Packard Enterprise recommends that you use the `boot management-module` command instead of pressing the module reset button to reboot a management module because if you are rebooting the only available management module, the `boot management-module` command enables you to save the configuration, cancel the reboot, or both.

Examples

Rebooting the active management module when the standby management module is available:

```
switch# boot management-module active
The management-module in slot 1/5 is going down for reboot now.
```

Rebooting the active management module when the standby management module is not available:


```
switch# boot management-module 1/5
The management module in slot 1/5 is currently active and no
standby management module was found.
This will reboot the entire switch.

Do you want to save the current configuration (y/n)? n

This will reboot the entire switch and render it unavailable
until the process is complete.
Continue (y/n)? y
The system is going down for reboot.
```

boot set-default

Syntax

```
boot set-default {primary | secondary}
```

Description

Sets the default operating system image to use when the system is booted.

Command context

Manager (#)

Parameters

primary

Selects the primary network operating system image.

secondary

Selects the secondary network operating system image.

Authority

Administrators or local user group members with execution rights for this command.

Example

Selecting the primary image as the default boot image:

```
switch# boot set-default primary
Default boot image set to primary.
```

boot system

Syntax

```
boot system [primary | secondary | serviceos]
```

Description

Reboots all modules on the switch. By default, the configured default operating system image is used. Optional parameters enable you to specify which system image to use for the reboot operation and for future reboot operations.

Command context

Manager (#)

Parameters

primary

Selects the primary operating system image for this reboot and sets the configured default operating system image to `primary` for future reboots.

secondary

Selects the secondary operating system image for this reboot and sets the configured default operating system image to `secondary` for future reboots.

serviceos

Selects the service operating system for this reboot. Does not change the configured default operating system image. The service operating system acts as a standalone bootloader and recovery OS for switches running the ArubaOS-CX operating system and is used in rare cases when troubleshooting a switch.

Authority

Administrators or local user group members with execution rights for this command.

Usage

This command reboots the entire system. If you do not select one of the optional parameters, the system reboots from the configured default boot image.

You can use the `show images` command to show information about the primary and secondary system images.

Choosing one of the optional parameters affects the setting for the default boot image:

- If you select the `primary` or `secondary` optional parameter, that image becomes the configured default boot image for future system reboots. The command fails if the switch is not able to set the operating system image to the image you selected.

You can use the `boot set-default` command to change the configured default operating system image.

- If you select `serviceos` as the optional parameter, the configured default boot image remains the same, and the system reboots all management modules with the service operating system.

If the configuration of the switch has changed since the last reboot, when you execute the `boot system` command you are prompted to save the configuration and you are prompted to confirm the reboot operation.

Saving the configuration is not required. However, if you attempt to save the configuration and there is an error during the save operation, the `boot system` command is aborted.

Examples

Rebooting the system from the configured default operating system image:

```
switch# boot system
Do you want to save the current configuration (y/n)? y
The running configuration was saved to the startup configuration.
```

```
This will reboot the entire switch and render it unavailable
until the process is complete.
```

```
Continue (y/n)? y  
The system is going down for reboot.
```

Rebooting the system from the secondary operating system image, setting the secondary operating system image as the configured default boot image:

```
switch# boot system secondary  
Default boot image set to secondary.
```

```
Do you want to save the current configuration (y/n)? n
```

```
This will reboot the entire switch and render it unavailable  
until the process is complete.
```

```
Continue (y/n)? y  
The system is going down for reboot.
```

Canceling a system reboot:

```
switch# boot system
```

```
Do you want to save the current configuration (y/n)? n
```

```
This will reboot the entire switch and render it unavailable  
until the process is complete.
```

```
Continue (y/n)? n  
Reboot aborted.
```

```
switch#
```

show boot-history

Syntax

```
show boot-history [all]
```

Description

Shows boot information. When no parameters are specified, shows the most recent information about the boot operation, and the three previous boot operations for the active management module. When the `all` parameter is specified, shows the boot information for the active management module and all available line modules. To view boot-history on the standby, the command must be sent on the standby console.

Command context

Manager (#)

Parameters

all

Shows boot information for the active management module and all available line modules.

Authority

Administrators or local user group members with execution rights for this command.

Usage

This command displays the boot-index, boot-ID, and up time in seconds for the current boot. If there is a previous boot, it displays boot-index, boot-ID, reboot time (based on the time zone configured in the system) and reboot reasons. Previous boot information is displayed in reverse chronological order.

Index

The position of the boot in the history file. Range: 0 to 3.

Boot ID

A unique ID for the boot . A system-generated 128-bit string.

Current Boot, up for *<SECONDS>* seconds

For the current boot, the `show boot-history` command shows the number of seconds the module has been running on the current software.

Timestamp boot reason

For previous boot operations, the `show boot-history` command shows the time at which the operation occurred and the reason for the boot. The reason for the boot is one of the following values:

<DAEMON-NAME> crash

The daemon identified by *<DAEMON-NAME>* caused the module to boot.

Kernel crash

The operating system software associated with the module caused the module to boot.

Reboot requested through database

The reboot occurred because of a request made through the CLI or other API.

Uncontrolled reboot

The reason for the reboot is not known.

Examples

Showing the boot history of the active management module:

```
switch# show boot-history
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs

Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database
switch#
```

Showing the boot history of the active management module and all line modules:

```
switch# show boot-history all
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs
```

```
Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database

Line module 1/1
=====
Index : 3
10 Aug 17 12:45:46 : dune_agent crashed
...
```

bluetooth disable

Syntax

```
bluetooth disable
```

```
no bluetooth disable
```

Description

Disables the Bluetooth feature on the switch. The Bluetooth feature includes both Bluetooth Classic and Bluetooth Low Energy (BLE). Bluetooth is enabled by default.

The `no` form of this command enables the Bluetooth feature on the switch.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Example

Disabling Bluetooth on the switch. `<XXXX>` is the switch platform and `<NNNNNNNNNN>` is the device identifier.

```
switch(config)# bluetooth disable
switch# show bluetooth
Enabled           : No
Device name       : <XXXX>-<NNNNNNNNNN>

switch(config)# show running-config
...
bluetooth disabled
...
```

bluetooth enable

Syntax

```
bluetooth enable
```

```
no bluetooth enable
```

Description

This command enables the Bluetooth feature on the switch. The Bluetooth feature includes both Bluetooth Classic and Bluetooth Low Energy (BLE).

Default: Bluetooth is enabled by default.

The `no` form of this command disables the Bluetooth feature on the switch.

Command context

`config`

Authority

Administrators or local user group members with execution rights for this command.

Usage

The default configuration of the Bluetooth feature is `enabled`. The output of the `show running-config` command includes Bluetooth information only if the Bluetooth feature is disabled.

The Bluetooth feature includes both Bluetooth Classic and Bluetooth Low Energy (BLE).

The Bluetooth feature requires the USB feature to be enabled. If the USB feature has been disabled, you must enable the USB feature before you can enable the Bluetooth feature.

Examples

```
switch(config)# bluetooth enable
```

clear events

Syntax

`clear events`

Description

Clears up event logs. Using the `show events` command will only display the logs generated after the `clear events` command.

Command context

Manager (#)

Authority

Administrators or local user group members with execution rights for this command.

Examples

Clearing all generated event logs:

```
switch# show events
-----
show event logs
-----
2018-10-14:06:57:53.534384|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource utilization poll interval is changed to 27
2018-10-14:06:58:30.805504|lldpd|103|LOG_INFO|MSTR|1|Configured LLDP tx-timer to 36
2018-10-14:07:01:01.577564|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource utilization poll interval is changed to 49

switch# clear events

switch# show events
-----
show event logs
-----
2018-10-14:07:03:05.637544|hpe-sysmond|6301|LOG_INFO|MSTR|1|System resource utilization poll interval is changed to 34
```

clear ip errors

Syntax

```
clear ip errors
```

Description

Clears all IP error statistics.

Command context

Manager (#)

Authority

Administrators or local user group members with execution rights for this command.

Example

Clearing and showing ip errors:

```
switch# clear ip errors
switch# show ip errors
-----
Drop reason                Packets
-----
Malformed packets          0
IP address errors          0
...
```

domain-name

Syntax

```
domain-name <NAME>
```

```
no domain-name [<NAME>]
```

Description

Specifies the domain name of the switch.

The `no` form of this command sets the domain name to the default, which is no domain name.

Command context

```
config
```

Parameters

<NAME>

Specifies the domain name to be assigned to the switch. The first character of the name must be a letter or a number. Length: 1 to 32 characters.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting and showing the domain name:

```
switch# show domain-name

switch# config
switch(config)# domain-name example.com
switch(config)# show domain-name
example.com
switch(config)#
```

Setting the domain name to the default value:

```
switch(config)# no domain-name
switch(config)# show domain-name

switch(config)#
```

fabric admin-state

Syntax

```
fabric <SLOT-ID> admin-state {diagnostic | down | up}
```

Description

Sets the administrative state of the specified fabric module.

Command context

config

Parameters

<SLOT-ID>

Specifies the member and slot of the module. For example, to specify the module in member 1, slot 2, enter the following:

1/2

admin-state {diagnostic | down | up}

Selects the administrative state in which to put the specified module:

diagnostic

Selects the `diagnostic` administrative state. Network traffic does not pass through the module.

down

Selects the `down` administrative state. Network traffic does not pass through the module.

up

Selects the `up` administrative state. The module is fully operational. The `up` state is the default administrative state.

Authority

Administrators or local user group members with execution rights for this command.

Usage

This command is valid for fabric modules only.

Examples

Setting the administrative state of the fabric module 2 to down:

```
switch(config)# fabric 1/2 admin-state down
```

hostname

Syntax

```
hostname <HOSTNAME>
```

```
no hostname [<HOSTNAME>]
```

Description

Sets the host name of the switch.

The `no` form of this command sets the host name to the default value, which is `switch`.

Command context

config

Parameters

<HOSTNAME>

Specifies the host name. The first character of the host name must be a letter or a number. Length: 1 to 32 characters. Default: `switch`

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting and showing the host name:

```
switch# show hostname
switch
switch# config
switch(config)# hostname myswitch
myswitch(config)# show hostname
myswitch
```

Setting the host name to the default value:

```
myswitch(config)# no hostname
switch(config)#
```

led locator

Syntax

```
led locator {on | off | slow_blink | flashing | fast_blink | half_bright}
```

Description

Sets the state of the locator LED.

Command context

Manager (#)

Parameters

on

Turns on the LED.

off

Turns off the LED, which is the default value.

slow_blink

Sets the LED to slow blink on and off.

flashing

Sets the LED to blink on and off repeatedly.

fast_blink

Sets the LED to fast blink on and off.

half_bright

Sets the LED intensity to half bright.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the state of the locator LED:

```
switch# led locator flashing
```

module admin-state

Syntax

```
module <SLOT-ID> admin-state {diagnostic | down | up}
```

Description

Sets the administrative state of the specified line module.

Command context

config

Parameters

<SLOT-ID>

Specifies the member and slot of the module. For example, to specify the module in member 1, slot 3, enter the following:

admin-state {diagnostic | down | up}

Selects the administrative state in which to put the specified module:

diagnostic

Selects the `diagnostic` administrative state. Network traffic does not pass through the module.

down

Selects the `down` administrative state. Network traffic does not pass through the module.

up

Selects the `up` administrative state. The line module is fully operational. The `up` state is the default administrative state.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the administrative state of the module in slot 1/3 to `down`:

```
switch(config)# module 1/3 admin-state down
```

module product-number

Syntax

```
module <SLOT-ID> product-number [<PRODUCT-NUM>]
```

```
no module <SLOT-ID>
```

Description

Changes the configuration of the switch to indicate that the specified member and slot number contains, or will contain, a line module.

The `no` form of this command removes the line module and its interfaces from the configuration. If there is a line module installed in the slot, the line module is powered off and then powered on.

Command context

```
config
```

Parameters

<SLOT-ID>

Specifies the member and slot in the form `m/s`, where `m` is the member number, and `s` is the slot number.

<PRODUCT-NUM>

Specifies the product number of the line module. For example: `JL363A`

If there is a line module installed in the slot when you execute this command, `<PRODUCT-NUM>` is optional. The switch reads the product number information from the module that is installed in the slot.

If there is no line module installed in the slot when you execute this command, `<PRODUCT-NUM>` is required.

Authority

Administrators or local user group members with execution rights for this command.

Usage

The default configuration associated with a line module slot is:

- There is no module product number or interface configuration information associated with the slot. The slot is available for the installation with any supported line module.
- The Admin State is Up (which is the default value for Admin State).

To add a line module to the configuration, you must use the `module` command either before or after you install the physical module.

If you execute the `module` command after you install a line module in an empty slot, you can omit the `<PRODUCT-NUM>` variable. The switch reads the product information from the installed module.

If the module is not installed in the slot when you execute the `module` command, you must specify a value for the `<PRODUCT-NUM>` variable:

- The switch validates the product number of the module against the slot number you specify to ensure that the right type of module is configured for the specified slot.
For example, the switch returns an error if you specify the product number of a line module for a slot reserved for management modules.
- You can configure the line module interfaces before the line module is installed.

When you install the physical line module in a preconfigured slot, the following actions occur:

- If a product number was specified in the command and it matches the product number of the installed module, the switch initializes the module.
- If a product number was specified in the command and the product number of the module does not match what was specified, the module device initialization fails.

The `no` form of the command removes the line module and its interfaces from the configuration and restores the line module slot to the default configuration.

If there is a line module installed in the slot when you execute the `no` form of the command, the command also powers off and then powers on the module. Traffic passing through the line module is stopped. Management sessions connected through the line module are also affected.

If the slot associated with the line module is in the default configuration, you can remove the module from the chassis without disrupting the operation of the switch.

Examples

Configuring slot 1/1 for future installation of a line module:

```
switch(config)# module 1/1 product-number j1363a
```

Configuring a line module that is already installed in slot 1/1:

```
switch(config)# module 1/1 product-number
```

Attempting to configure slot 1/1 for the future installation of a line module without specifying the product number (returned error shown):

```
switch(config)# module 1/1 product-number  
Line module '1/4' is not physically available. Please provide the product  
number to preconfigure the line module.
```

Configuring a JL363A line module in a slot that has already been used to configure a different module:

```
switch(config)# no module 1/4  
switch(config)# module 1/4 product-number jl363a
```

Removing a module from the configuration:

```
switch(config)# no module 1/1  
This command will power cycle the specified line module and restore its default  
configuration. Any traffic passing through the line module will be interrupted.  
Management sessions connected through the line module will be affected. It  
might take a few minutes to complete this operation.  
  
Do you want to continue (y/n)? y  
switch(config)#
```

mtrace

Syntax

```
mtrace <IPV4-SRC-ADDR> <IPV4-GROUP-ADDR> [lhr <IPV4-LHR-ADDR>] [ttl <HOPS>]  
[vrf <VRF-NAME>]
```

Description

Traces the specified IPv4 source and group addresses.

Command context

Manager (#)

Parameters

IPV4-SRC-ADDR

Specifies the source IPv4 address to trace.

IPV4-GROUP-ADDR

Specifies the group IPv4 address to trace.

lhr <IPV4-LHR-ADDR>

Specifies the last hop router address from which to start the trace.

ttl <HOPS>

Specifies the Time-To-Live duration in hops. Range: 1 to 255 hops. Default: 8 hops.

vrf <VRF-NAME>

Specifies the name of the VRF. If a name is not specified the default VRF will be used.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Tracing with source, group, and LHR addresses and TTL:

```
(switch)# mtrace 20.0.0.1 239.1.1.1 lhr 10.1.1.1 ttl 10

Type escape sequence to abort.
Mtrace from 10.0.0.1 for Source 20.0.0.1 via Group 239.1.1.1
From destination(?) to source (?)...
Querying full reverse path...
0 10.0.0.1
-1 30.0.0.1 PIM 0 ms
-2 40.0.0.1 PIM 2 ms
-3 50.0.0.1 PIM 100 ms
-4 60.0.0.1 PIM 156 ms
-5 20.0.0.1 PIM 123 ms
```

Tracing with source and group addresses:

```
(switch)# mtrace 200.0.0.1 239.1.1.1

Type escape sequence to abort.
Mtrace from self for Source 200.0.0.1 via Group 239.1.1.1
From destination(?) to source (?)...
Querying full reverse path...
0 10.0.0.1
-1 30.0.0.1 PIM 0 ms
-2 40.0.0.1 PIM 2 ms
-3 50.0.0.1 PIM 100 ms
-4 60.0.0.1 PIM 156 ms
-5 200.0.0.1 PIM 123 ms
```

show bluetooth

Syntax

```
show bluetooth
```

Description

Shows general status information about the Bluetooth wireless management feature on the switch.

Command context

Operator (>) or Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

This command shows status information about the following:

- The USB Bluetooth adapter
- Clients connected using Bluetooth
- The switch Bluetooth feature.

The output of the `show running-config` command includes Bluetooth information only if the Bluetooth feature is disabled.

The device name given to the switch includes the switch serial number to uniquely identify the switch while pairing with a mobile device.

The management IP address is a private network address created for managing the switch through a Bluetooth connection.

Examples

Example output when Bluetooth is enabled but no Bluetooth adapter is connected. `<XXXX>` is the switch platform and `<NNNNNNNNNN>` is the device identifier.

```
switch# show bluetooth
Enabled           : Yes
Device name       : <XXXX>-<NNNNNNNNNN>
Adapter State     : Absent
```

Example output when Bluetooth is enabled and there is a Bluetooth adapter connected:

```
switch# show bluetooth
Enabled           : Yes
Device name       : <XXXX>-<NNNNNNNNNN>
Adapter State     : Ready
Adapter IP address : 192.168.99.1
Adapter MAC address : 480fcf-af153a

Connected Clients
-----
Name                MAC Address      IP Address      Connected Since
-----
Mark's iPhone       089734-b12000    192.168.99.10   2018-07-09 08:47:22 PDT
```

Example output when Bluetooth is disabled:

```
switch# show bluetooth
Enabled           : No
Device name       : <XXXX>-<NNNNNNNNNN>
```

show boot-history

Syntax

```
show boot-history [all]
```

Description

Shows boot information. When no parameters are specified, shows the most recent information about the boot operation, and the three previous boot operations for the active management module. When the `all` parameter is specified, shows the boot information for the active management module and all available line modules. To view boot-history on the standby, the command must be sent on the standby console.

Command context

Manager (#)

Parameters

all

Shows boot information for the active management module and all available line modules.

Authority

Administrators or local user group members with execution rights for this command.

Usage

This command displays the boot-index, boot-ID, and up time in seconds for the current boot. If there is a previous boot, it displays boot-index, boot-ID, reboot time (based on the time zone configured in the system) and reboot reasons. Previous boot information is displayed in reverse chronological order.

Index

The position of the boot in the history file. Range: 0 to 3.

Boot ID

A unique ID for the boot . A system-generated 128-bit string.

Current Boot, up for <SECONDS> seconds

For the current boot, the `show boot-history` command shows the number of seconds the module has been running on the current software.

Timestamp boot reason

For previous boot operations, the `show boot-history` command shows the time at which the operation occurred and the reason for the boot. The reason for the boot is one of the following values:

<DAEMON-NAME> crash

The daemon identified by <DAEMON-NAME> caused the module to boot.

Kernel crash

The operating system software associated with the module caused the module to boot.

Reboot requested through database

The reboot occurred because of a request made through the CLI or other API.

Uncontrolled reboot

The reason for the reboot is not known.

Examples

Showing the boot history of the active management module:

```
switch# show boot-history
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs

Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database
switch#
```

Showing the boot history of the active management module and all line modules:

```
switch# show boot-history all
Management module
=====

Index : 3
Boot ID : f1bf071bdd04492bbf8439c6e479d612
Current Boot, up for 22 hrs 12 mins 22 secs

Index : 2
Boot ID : edfa2d6598d24e989668306c4a56a06d
07 Aug 18 16:28:01 : Reboot requested through database

Index : 1
Boot ID : 0bda8d0361df4a7e8e3acdc1dba5caad
07 Aug 18 14:08:46 : Reboot requested through database

Index : 0
Boot ID : 23da2b0e26d048d7b3f4b6721b69c110
07 Aug 18 13:00:46 : Reboot requested through database

Line module 1/1
=====
Index : 3
10 Aug 17 12:45:46 : dune_agent crashed
...
```

show capacities

Syntax

```
show capacities <FEATURE> [vsx-peer]
```

Description

Shows system capacities and their values for all features or a specific feature.

Command context

Manager (#)

Parameters

<FEATURE>

Specifies a feature. For example, `aaa` or `vrrp`.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Usage

Capacities are expressed in user-understandable terms. Thus they may not map to a specific hardware or software resource or component. They are not intended to define a feature exhaustively.

Examples

Showing all available capacities for BGP:

```
switch# show capacities bgp
```

System Capacities: Filter BGP	
Capacities Name	Value
Maximum number of AS numbers in as-path attribute	32
...	

Showing all available capacities for mirroring:

```
switch# show capacities mirroring
```

System Capacities: Filter Mirroring	
Capacities Name	Value
Maximum number of Mirror Sessions configurable in a system	4
Maximum number of enabled Mirror Sessions in a system	4

Showing all available capacities for MSTP:

```
switch# show capacities mstp
```

System Capacities: Filter MSTP	
Capacities Name	Value
Maximum number of mstp instances configurable in a system	64

Showing all available capacities for VLAN count:

```
switch# show capacities vlan-count
```

System Capacities: Filter VLAN Count	
Capacities Name	Value
Maximum number of VLANs supported in the system	4094

show capacities-status

Syntax

```
show capacities-status <FEATURE>
    [vsx-peer]
```

Description

Shows system capacities status and their values for all features or a specific feature.

Command context

Manager (#)

Parameters

<FEATURE>

Specifies the feature, for example `aaa` or `vrrp` for which to display capacities, values, and status. Required.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Showing the system capacities status for all features:

```
switch# show capacities-status
```

System Capacities Status		
Capacities Status Name	Value	Maximum
Number of active gateway mac addresses in a system	0	16
Number of aspath-lists configured	0	64
Number of community-lists configured	0	64
...		

Showing the system capacities status for BGP:

```
switch# show capacities-status bgp
```

System Capacities Status: Filter BGP		
Capacities Status Name	Value	Maximum
Number of aspath-lists configured	0	64
Number of community-lists configured	0	64
Number of neighbors configured across all VRFs	0	50
Number of peer groups configured across all VRFs	0	25
Number of prefix-lists configured	0	64
Number of route-maps configured	0	64
Number of routes in BGP RIB	0	256000
Number of route reflector clients configured across all VRFs	0	16

show core-dump

Syntax

```
show core-dump [all | <SLOT-ID>]
```

Description

Shows core dump information about the specified module. When no parameters are specified, shows only the core dumps generated in the current boot of the management module. When the `all` parameter is specified, shows all available core dumps.

Command context

Manager (#)

Parameters

all

Shows all available core dumps.

<SLOT-ID>

Shows the core dumps for the management module or line module in <SLOT-ID>. <SLOT-ID> specifies a physical location on the switch. Use the format `member/slot/port` (for example, 1/3/1) for line modules. Use the format `member/slot` for management modules.

You must specify the slot ID for either the active management module, or the line module.

Authority

Administrators or local user group members with execution rights for this command.

Usage

When no parameters are specified, the `show core-dump` command shows only the core dumps generated in the current boot of the management module. You can use this command to determine when any crashes are occurring in the current boot.

If no core dumps have occurred, the following message is displayed: `No core dumps are present`

To show core dump information for the standby management module, you must use the `standby` command to switch to the standby management module and then execute the `show core-dump` command.

In the output, the meaning of the information is the following:

Daemon Name

Identifies name of the daemon for which there is dump information.

Instance ID

Identifies the specific instance of the daemon shown in the `Daemon Name` column.

Present

Indicates the status of the core dump:

Yes

The core dump has completed and available for copying.

In Progress

Core dump generation is in progress. Do not attempt to copy this core dump.

Timestamp

Indicates the time the daemon crash occurred. The time is the local time using the time zone configured on the switch.

Build ID

Identifies additional information about the software image associated with the daemon.

Examples

Showing core dump information for the current boot of the active management module only:

```
switch# show core-dump
=====
Daemon Name      | Instance ID | Present      | Timestamp                | Build ID
=====
hpe-fand         | 1399        | Yes          | 2017-08-04 19:05:34      | 1246d2a
hpe-sysmond      | 957         | Yes          | 2017-08-04 19:05:29      | 1246d2a
=====
Total number of core dumps : 2
=====
```

Showing all core dumps:

```
switch# show core-dump all
=====
Management Module core-dumps
=====
Daemon Name      | Instance ID | Present   | Timestamp           | Build ID
=====
hpe-sysmond      513          Yes       2017-07-31 13:58:05  e70f101
hpe-tempd        1048         Yes       2017-08-13 13:31:53  e70f101
hpe-tempd        1052         Yes       2017-08-13 13:41:44  e70f101

Line Module core-dumps
=====
Line Module : 1/1
=====
dune_agent_0     18958        Yes       2017-08-12 11:50:17  e70f101
dune_agent_0     18842        Yes       2017-08-12 11:50:09  e70f101
=====
Total number of core dumps : 5
=====
```

show domain-name

Syntax

```
show domain-name [vsx-peer]
```

Description

Shows the current domain name.

Command context

Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Usage

If there is no domain name configured, the CLI displays a blank line.

Example

Setting and showing the domain name:

```
switch# show domain-name

switch# config
switch(config)# domain-name example.com
switch(config)# show domain-name
```

show environment fan

Syntax

```
show environment fan [vsf | vsx-peer]
```

Description

Shows the status information for all fans and fan trays (if present) in the system.

Command context

Manager (#)

Parameters

vsf

Shows output from the VSF member-id on switches that support VSF.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

For fan trays, *Status* is one of the following values:

ready

The fan tray is operating normally.

fault

The fan tray is in a fault event. The status of the fan tray does not indicate the status of fans.

empty

The fan tray is not installed in the system.

For fans:

Speed

Indicates the relative speed of the fan based on the nominal speed range of the fan. Values are:

Slow

The fan is running at less than 25% of its maximum speed.

Normal

The fan is running at 25-49% of its maximum speed.

Medium

The fan is running at 50-74% of its maximum speed.

Fast

The fan is running at 75-99% of its maximum speed.

Max

The fan is running at 100% of its maximum speed.

N/A

The fan is not installed.

Direction

The direction of airflow through the fan. Values are:

front-to-back

Air flows from the front of the system to the back of the system.

N/A

The fan is not installed.

Status

Fan status. Values are:

uninitialized

The fan has not completed initialization.

ok

The fan is operating normally.

fault

The fan is in a fault state.

empty

The fan is not installed.

Examples

Showing output for systems with fan trays for 8400 switch series:

```
switch# show environment fan
```

```
Fan tray information
```

Mbr/Tray	Description	Status	Serial Number	Fans
1/1	JL369A 8400 Fan tray	ready	SGXXXXXXXXXX	6
1/2	JL369A 8400 Fan tray	ready	SGXXXXXXXXXX	6
1/3	N/A	empty	N/A	0

```
Fan information
```

Mbr/Tray/Fan	Serial Number	Speed	Direction	Status	RPM
1/1/1	SGXXXXXXXXXX	slow	front-to-back	ok	6000
1/1/2	SGXXXXXXXXXX	normal	front-to-back	ok	8000
1/1/3	SGXXXXXXXXXX	medium	front-to-back	ok	11000
1/1/4	SGXXXXXXXXXX	fast	front-to-back	ok	14000
1/1/5	SGXXXXXXXXXX	max	front-to-back	fault	16500
1/1/6	N/A	N/A	N/A	empty	0
1/2/1	SGXXXXXXXXXX	slow	front-to-back	ok	6000
...					

Showing output for a system without a fan tray:

```
switch# show environment fan
```

Fan information

Fan	Serial Number	Speed	Direction	Status	RPM
1	SGXXXXXXXXXX	slow	front-to-back	ok	6000
2	SGXXXXXXXXXX	normal	front-to-back	ok	8000
3	SGXXXXXXXXXX	medium	front-to-back	ok	11000
4	SGXXXXXXXXXX	fast	front-to-back	ok	14000
5	SGXXXXXXXXXX	max	front-to-back	fault	16500
6	N/A	N/A	N/A	empty	
...					

show environment led

Syntax

```
show environment led [vsf <MEMBER-ID>| vsx-peer]
```

Description

Shows state and status information for all the configurable LEDs in the system.

Command context

Operator (>) or Manager (#)

Parameters

vsf <MEMBER-ID>

Shows output from the specified VSF member-id on switches that support VSF.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing state and status for LED for 8400 or 8320 switch series:

```
switch# show environment led
```

Name	State	Status
locator	flashing	ok

show environment power-consumption

Syntax

```
show environment power-consumption [vsx-peer]
```

Description

Shows the power being consumed by each management module, line card, and fabric card subsystem, and shows power consumption for the entire chassis.

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

This command is only applicable to systems that support power consumption readings.

The power consumption values are updated once every minute.

The output of this command includes the following information:

Name

Shows the member number and slot number of the management module, line module, or fabric card module.

Type

Shows the type of module installed at the location specified by `Name`.

Description

Shows the product name and brief description of the module.

Usage

Shows the instantaneous power consumption of the module. Power consumption is shown in Watts.

Module Total Power Usage

Shows the total power consumption of all the modules listed. Power consumption is shown in Watts.

Chassis Total Power Usage

Shows the total instantaneous power consumed by the entire chassis, including modules and components that do not support individual power reporting. Power consumption is shown in Watts.

Chassis Total Power Available

Shows the total amount of power, in Watts, that can be supplied to the chassis.

Chassis Total Power Allocated

Shows total power, in Watts, that is allocated to powering the chassis and its installed modules.

Chassis Total Power Unallocated

Shows the total amount of power, in Watts, that has not been allocated to powering the chassis or its installed modules. This power can be used for additional hardware you install in the chassis.

Example

Showing power consumption usage for an Aruba 8400 switch

```
switch> show environment power-consumption
```

Name	Type	Description	Usage
1/5	management-module	JL368A 8400X Mgmt Mod	97 W
1/6	management-module	JL368A 8400X Mgmt Mod	49 W
1/1	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Mod	139 W
1/2	line-card-module	JL365A 8400X 8P 40G QSFP+ Adv Mod	158 W
1/3	line-card-module	JL366A 8400X 6P 40G/100G QSFP28 Adv Mod	127 W
1/4	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Adv Mod	148 W
1/7	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Adv Mod	152 W
1/8	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Adv Mod	125 W
1/9	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Adv Mod	132 W
1/10	line-card-module	JL363A 8400X 32P 10G SFP/SFP+ Msec Adv Mod	143 W
1/1	fabric-card-module	JL367A 8400X 7.2Tbps Fab Mod	107 W
1/2	fabric-card-module	JL367A 8400X 7.2Tbps Fab Mod	93 W
1/3	fabric-card-module	JL367A 8400X 7.2Tbps Fab Mod	87 W
Module Total Power Usage			1557 W
Chassis Total Power Usage			1807 W
Chassis Total Power Available			9990 W
Chassis Total Power Allocated (total of all max wattages)			4130 W
Chassis Total Power Unallocated			5860 W

show environment power-supply

Syntax

```
show environment power-supply [vsf | vsx-peer]
```

Description

Shows status information about all power supplies in the switch.

Command context

Operator (>) or Manager (#)

Parameters

vsf

Shows output from the VSF member-id on switches that support VSF.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command.
Operators can execute this command from the operator context (>) only.

Usage

The following information is provided for each power supply:

Mbr/PSU

Shows the member and slot number of the power supply.

Product Number

Shows the product number of the power supply.

Serial Number

Shows the serial number of the power supply, which uniquely identifies the power supply.

PSU Status

The status of the power supply. Values are:

OK

Power supply is operating normally.

OK*

Power supply is operating normally, but it is the only power supply in the chassis. One power supply is not sufficient to supply full power to the switch. When this value is shown, the output of the command also shows a message at the end of the displayed data.

Absent

No power supply is installed in the specified slot.

Input fault

The power supply has a fault condition on its input.

Output fault

The power supply has a fault condition on its output.

Warning

The power supply is not operating normally.

Wattage Maximum

Shows the maximum amount of wattage that the power supply can provide.

Example

Showing the output when only one power supply is active in the chassis:

```
switch# show environment power-supply
```

Mbr/PSU	Product Number	Serial Number	PSU Status	Wattage Maximum
1/1	JL372A	M031RM002JAFC	OK*	2700
1/2	N/A	N/A	Absent	0
1/3	N/A	N/A	Input Fault	0
1/4	JL372A	M031RM003JAFC	Output Fault	0

* More than one active power supply required to supply full power to the switch

show environment rear-display-module

Syntax

```
show environment rear-display-module [vsx-peer]
```

Description

Shows information about the display module on the back of the switch (Aruba 8400 switches only).

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing the rear display module information on the back of the switch:

```
switch> show environment rear-display-module
```

```
Rear display module is ready
Description: 8400 Rear Display Mod
Full Description: 8400 Rear Display Module
Serial number: SG000000000
Part number: 5300_0272
```

show environment temperature

Syntax

```
show environment temperature [detail] [vsf | vsx-peer]
```

Description

Shows the temperature information from sensors in the switch that affect fan control.

Command context

Operator (>) or Manager (#)

Parameters

detail

Shows detailed information from each temperature sensor.

vsf

Shows output from the VSF member-id on switches that support VSF.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

Temperatures are shown in Celsius.

Valid values for status are the following:

normal

Sensor is within nominal temperature range.

min

Lowest temperature from this sensor.

max

Highest temperature from this sensor.

low_critical

Lowest threshold temperature for this sensor.

critical

Highest threshold temperature for this sensor.

fault

Fault event for this sensor.

emergency

Over temperature event for this sensor.

Examples

Showing current temperature information for an 8400 switch:

```
switch# show environment temperature
```

Temperature information

Mbr/Slot-Sensor	Module Type	Current temperature	Status
1/1-PCIE-Switch	line-card-module	95.82 C	normal
1/1-Processor	line-card-module	0.00 C	fault
1/1-Switch-ASIC	line-card-module	116.36 C	emergency
1/1-Switch-ASIC-Internal	line-card-module	108.25 C	critical
1/2-PCIE-Switch	line-card-module	95.82 C	normal
...			

Showing detailed temperature information for an 8400 switch:

```
switch# show environment temperature detail
```

Detailed temperature information

```
-----
Mbr/Slot-Sensor      : 1/1-PCIE-Switch
Module Type          : line-card-module
Module Description    : JL363A 8400X 32P 10G SFP/SFP+ Msec Mod
Status               : normal
Fan-state            : normal
Current temperature   : 95.82 C
Minimum temperature   : 93.52 C
Maximum temperature   : 96.15 C
...

```

show events

Syntax

```
show events [ -e <EVENT-ID> |
    -s {alert | crit | debug | emer | err | info | notice | warn} |
    -r | -a | -i <MEMBER/SLOT> | -n <count> |
    -m {active | standby} |
    -c {lldp | ospf | ... | } |
    -d {lldpd | hpe-fand | ... |}]

```

Description

Shows event logs generated by the switch modules since the last reboot.

Command context

Manager (#)

Parameters

-e <EVENT-ID>

Shows the event logs for the specified event ID. Event ID range: 101 through 99999.

-s {alert | crit | debug | emer | err | info | notice | warn}

Shows the event logs for the specified severity. Select the severity from the following list:

- **alert:** Displays event logs with severity alert and above.
- **crit:** Displays event logs with severity critical and above.
- **debug:** Displays event logs with all severities.
- **emer:** Displays event logs with severity emergency only.
- **err:** Displays event logs with severity error and above.
- **info:** Displays event logs with severity info and above.
- **notice:** Displays event logs with severity notice and above.
- **warn:** Displays event logs with severity warning and above.

-r

Shows the most recent event logs first.

-a

Shows all event logs, including those events from previous boots.

-i *<MEMBER-SLOT>*

Shows the event logs for the specified slot ID.

-n *<count>*

Displays the specified number of event logs.

-m {**active** | **standby**}

Shows the event logs for the specified management card role on an 8400 or 6400 switch. Selecting *active* displays the event log for the AMM management card role and *standby* displays event logs for the SMM management card role.

-c {**lldp** | **ospf** | ... | }

Shows the event logs for the specified event category. Enter `show event -c` for a full listing of supported categories with descriptions.

-d {**lldpd** | **hpe-fand** | ... | }

Shows the event logs for the specified process. Enter `show event -d` for a full listing of supported daemons with descriptions.

Authority

Auditors or Administrators or local user group members with execution rights for this command. Auditors can execute this command from the auditor context (auditor>) only.

Examples

Showing event logs:

```
switch# show events
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to up for bridge_normal interface
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1 in Hardware
```

Showing the most recent event logs first:

```
switch# show events -r
-----
show event logs
-----
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1 in Hardware
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to up for bridge_normal interface
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
```

Showing all event logs:

```
switch# show events -a
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to up for bridge_normal interface
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1 in Hardware
```

Showing event logs related to the DHCP relay agent:

```
switch# show events -c dhcp-relay
2016-05-31:06:26:27.363923|hpe-relay|110001|LOG_INFO|DHCP Relay Enabled
2016-05-31:07:08:51.351755|hpe-relay|110002|LOG_INFO|DHCP Relay Disabled
```

Showing event logs related to the DHCPv6 relay agent:


```
switch# show events -c dhcpv6-relay
2016-05-31:06:26:27.363923|hpe-relay|109001|LOG_INFO|DHCPv6 Relay Enabled
2016-05-31:07:08:51.351755|hpe-relay|109002|LOG_INFO|DHCPv6 Relay Disabled
```

Showing event logs related to IRDP:

```
switch# switch# show events -c irdp
2016-05-31:06:26:27.363923|hpe-rdiscd|111001|LOG_INFO|IRDP enabled on interface %s
2016-05-31:07:08:51.351755|hpe-rdiscd|111002|LOG_INFO|IRDP disabled on interface %s
```

Showing event logs related to LACP:

```
switch# show events -c lacp
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
```

Showing event logs as per the specified management card role for an 8400 or 6400 switch:

```
switch# show events -m active
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
2016-12-01:12:37:31.734541|intfd|4001|INFO|AMM|1|Interface port_admin set to up for bridge_normal interface
2016-12-01:12:37:32.583256|switchd|24002|ERR|AMM|1|Failed to create VLAN 1 in Hardware
```

Showing event logs as per the specified slot ID for an 8400 or 6400 switch:

```
switch# show events -i 1/1
-----
show event logs
-----
2017-08-17:22:32:25.743991|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource utilization poll interval is changed to 313
2017-08-17:22:33:01.692860|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource utilization poll interval is changed to 23
2017-08-17:22:33:06.181436|hpe-sysmond|6301|LOG_INFO|LC|1/1|System resource utilization poll interval is changed to 512
2017-08-17:22:33:06.181436|systemd-coredump|1201|LOG_CRIT|LC|1/1|hpe-sysmond crashed due to signal:11
```

Showing event logs as per the specified process:

```
switch# show events -d lacpd
-----
show event logs
-----
2016-12-01:12:37:31.733551|lacpd|15007|INFO|AMM|1|LACP system ID set to 70:72:cf:51:50:7c
```

Displaying the specified number of event logs:

```
switch# show events -n 5
-----
show event logs
-----
2018-03-21:06:12:15.500603|arpmgrd|6101|LOG_INFO|AMM|-|ARPMGRD daemon has started
2018-03-21:06:12:17.734405|lldpd|109|LOG_INFO|AMM|-|Configured LLDP tx-delay to 2
2018-03-21:06:12:17.740517|lacpd|1307|LOG_INFO|AMM|-|LACP system ID set to 70:72:cf:d4:34:42
2018-03-21:06:12:17.743491|vrfmgrd|5401|LOG_INFO|AMM|-|Created a vrf entity 42cc3df7-1113-412f-b5cb-e8227b8c22f2
2018-03-21:06:12:17.904008|vrfmgrd|5401|LOG_INFO|AMM|-|Created a vrf entity 4409133e-2071-4ab8-adfe-f9662c06b889
```

show fabric

Syntax

```
show fabric [<SLOT-ID>] [vsx-peer]
```

Description

Shows information about the installed fabrics.

Command context

Operator (>) or Manager (#)

Parameters

<SLOT-ID>

Specifies the member and slot of the fabric to show. For example, to show the module in member 1, slot 2, enter the following:

1/2

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Showing all fabrics:

```
switch# show fabric
```

```
Fabric Modules  
=====
```

Slot	Product Number	Description	Serial Number	Status
1/1	JL367A	8400X 7.2Tbps Fab Mod	SG00000000	Ready
1/2	JL367A	8400X 7.2Tbps Fab Mod	SG00000000	Initializing
1/3	JL367A	8400X 7.2Tbps Fab Mod	SG00000000	Initializing

Showing a single fabric:

```
switch# show fabric 1/1
```

```
Fabric module 1/1 is ready  
Admin state: Up  
Description: 8400X 7.2Tbps Fab Mod  
Full Description: Aruba 8400X 7.2Tbps Fabric Module  
Serial number: SG00000000  
Product number: JL367A
```

show hostname

Syntax

```
show hostname [vsx-peer]
```

Description

Shows the current host name.

Command context

Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting and showing the host name:

```
switch# show hostname
switch
switch# config
switch(config)# hostname myswitch
myswitch(config)# show hostname
myswitch
```

show images

Syntax

```
show images [vsx-peer]
```

Description

Shows information about the software in the primary and secondary images.

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing the primary and secondary images:

```
switch# show images
-----
ArubaOS-CX Primary Image
-----
```

```
Version : XL.xx.xx.xxxx
Size    : 141 MB
Date    : 2017-06-30 14:02:34 PDT
SHA-256 : 2cf24dba5fb0a30e26e83b2ac5b9e29e1b161e5c1fa7425e73043362938b9824
```

ArubaOS-CX Secondary Image

```
Version : XL.xx.xx.xxxx
Size    : 143 MB
Date    : 2017-06-30 14:02:34 PDT
SHA-256 : 2cf24dba5fb0a30e26e83b2ac5b9e29e1b161e5c1fa7425e73043362938b9824
```

Default Image : secondary

Management Module 1/5 (Active)

```
Active Image      : primary
Service OS Version : GT.01.01.0001
BIOS Version      : GT-01-0013
```

Management Module 1/6 (Standby)

```
Active Image      : secondary
Service OS Version : GT.01.01.0001
BIOS Version      : GT-01-0013
```

show ip errors

Syntax

```
show ip errors [vsx-peer]
```

Description

Shows IP error statistics for packets received by the switch since the switch was last booted.

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

IP error info about received packets is collected from each active line card on the switch and is preserved during failover events. Error counts are cleared when the switch is rebooted.

Drop reasons are the following:

Malformed packet

The packet does not conform to TCP/IP protocol standards such as packet length or internet header length.

A large number of malformed packets can indicate that there are hardware malfunctions such as loose cables, network card malfunctions, or that a DOS (denial of service) attack is occurring.

IP address error

The packet has an error in the destination or source IP address. Examples of IP address errors include the following:

- The source IP address and destination IP address are the same.
- There is no destination IP address.
- The source IP address is a multicast IP address.
- The forwarding header of an IPv6 address is empty.
- There is no source IP address for an IPv6 packet.

Invalid TTLs

The TTL (time to live) value of the packet reached zero. The packet was discarded because it traversed the maximum number of hops permitted by the TTL value.

TTLs are used to prevent packets from being circulated on the network endlessly.

Example

Showing ip error statistics for packets received by the switch:

```
switch# show ip errors
-----
Drop reason                Packets
-----
Malformed packets          1
IP address errors          10
...
```

show module

Syntax

```
show module [<SLOT-ID>] [vsx-peer]
```

Description

Shows information about installed line modules and management modules.

Command context

Operator (>) or Manager (#)

Parameters

<SLOT-ID>

Specifies the member and slot numbers in format `member/slot`. For example, to show the module in member 1, slot 3, enter 1/3.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

Identifies and shows status information about the line modules and management modules that are installed in the switch.

If you use the <SLOT-ID> parameter to specify a slot that does not have a line module installed, a message similar to the following example is displayed:

```
Module 1/4 is not physically present.
```

To show the configuration information—if any—associated with that line module slot, use the `show running-configuration` command.

Status is one of the following values:

Active

This module is the active management module.

Standby

This module is the standby management module.

Deinitializing

The module is being deinitialized.

Diagnostic

The module is in a state used for troubleshooting.

Down

The module is physically present but is powered down.

Empty

The module hardware is not installed in the chassis.

Failed

The module has experienced an error and failed.

Failover

This module is a fabric module or a line module, and it is in the process of connecting to the new active management module during a management module failover event.

Initializing

The module is being initialized.

Present

The module hardware is installed in the chassis.

Ready

The module is available for use.

Updating

A firmware update is being applied to the module.

Examples

Showing all installed modules:

```
switch# show module
```

Management Modules

=====

Slot	Product Number	Description	Serial Number	Status
1/5	JL368A	8400 Mgmt Mod	SG00000000	Active
1/6	JL368A	8400 Mgmt Mod	SG00000000	Standby

Line Modules

=====

Slot	Product Number	Description	Serial Number	Status
1/1	JL363A	8400X 32P 10G SFP/SFP+ Msec Mod	SG00000000	Down
1/3	JL365A	8400X 8P 40G QSFP+ Adv Mod	SG00000000	Ready
1/4	JL366A	8400X 6P 40G/100G QSFP28 Adv Mod	SG00000000	Initializing
1/8	JL365A	8400X 8P 40G QSFP+ Adv Mod	SG00000000	Ready
1/10	JL365A	8400X 8P 40G QSFP+ Adv Mod	SG00000000	Ready
...				

Showing a management module:

```
switch# show module 1/5
```

```
Management module 1/5 is active
Admin state: Up
Description: 8400 Mgmt Mod
Full Description: 8400 Management Module
Serial number: SG00000000
Product number: JL368A
```

Showing a slot that does not contain a line module:

```
switch(config)# show module 1/3
```

```
Module 1/3 is not physically present
```

Showing a line module after removing it from the configuration with `no module` command, but the hardware remains installed in the slot:

```
switch(config)# show module 1/1
```

```
Line module 1/1 is ready
Admin state: Up
Description: 8400X 32P 10G SFP/SFP+ Msec Mod
Full Description: 8400X 32-port 10GbE SFP/SFP+ with MACsec Advanced Module
```

show running-config

Syntax

```
show running-config [<FEATURE>] [all] [vsx-peer]
```

Description

Shows the current nondefault configuration running on the switch. No user information is displayed.

Command context

Manager (#)

Parameters

<FEATURE>

Specifies the name of a feature. For a list of feature names, enter the `show running-config` command, followed by a space, followed by a question mark (?). When the `json` parameter is used, the `vsx-peer` parameter is not applicable.

all

Shows all default values for the current running configuration.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Showing the current running configuration:

```
switch> show running-config
Current configuration:
!
!Version ArubaOS-CX 10.0X.XXXX
!
lldp enable
linecard-module LC1 part-number JL363A
vrf green
!
!
!
!
!
!
aaa authentication login default local
aaa authorization commands default none
!
!
!
```



```

router ospf 1 vrf green
  area 0.0.0.0
router pim vrf green
  enable
  rp-address 30.0.0.4
vlan 1
  no shutdown
vlan 20
  no shutdown
vlan 30
  no shutdown
interface 1/1/1
  no shutdown
  no routing
  vlan access 30
interface 1/1/32
  no shutdown
  no routing
  vlan access 20
interface bridge_normal-1
  no shutdown
interface bridge_normal-2
  no shutdown
interface vlan20
  no shutdown
  vrf attach green
  ip address 20.0.0.44/24
  ip ospf 1 area 0.0.0.0
  ip pim-sparse enable

interface vlan30
  no shutdown
  vrf attach green
  ip address 30.0.0.44/24
  ip ospf 1 area 0.0.0.0
  ip pim-sparse enable

  ip pim-sparse hello-interval 100

```

Showing the current running configuration in json format:

```

switch> show running-config json
Running-configuration in JSON:
{
  "Monitoring_Policy_Script": {
    "system_resource_monitor_mm1.1.0": {
      "Monitoring_Policy_Instance": {
        "system_resource_monitor_mm1.1.0/system_resource_monitor_mm1.1.0.default": {
          "name": "system_resource_monitor_mm1.1.0.default",
          "origin": "system",
          "parameters_values": {
            "long_term_high_threshold": "70",
            "long_term_normal_threshold": "60",
            "long_term_time_period": "480",
            "medium_term_high_threshold": "80",
            "medium_term_normal_threshold": "60",
            "medium_term_time_period": "120",
            "short_term_high_threshold": "90",
            "short_term_normal_threshold": "80",
            "short_term_time_period": "5"
          }
        },
      }
    },
  },
  ...
  ...

```

...
...

Show the current running configuration without default values:

```
switch(config)# show running-config
Current configuration:
!
!Version ArubaOS-CX Virtual.10.04.0000-6523-gbb15c03~dirty
led locator on
!
!
!
!
!
!
!
!
!
vlan 1
switch(config)# show running-config all
Current configuration:
!
!Version ArubaOS-CX Virtual.10.04.0000-6523-gbb15c03~dirty
led locator on
!
!
!
!
!
!
!
!
!
vlan 1
switch(config)#
```

Show the current running configuration with default values:

```
switch(config)# snmp-server vrf mgmt
switch(config)# show running-config
Current configuration:
!
!Version ArubaOS-CX Virtual.10.04.0000-6523-gbb15c03~dirty
led locator on
!
!
!
!
!
snmp-server vrf mgmt
!
!
!
!
!
vlan 1
switch(config)#
switch(config)#
switch(config)# show running-config all
Current configuration:
!
!Version ArubaOS-CX Virtual.10.04.0000-6523-gbb15c03~dirty
led locator on
!
```

```

!
!
!
snmp-server vrf mgmt
snmp-server agent-port 161
snmp-server community public
!
!
!
!
!
vlan 1
switch(config)#

```

show running-config current-context

Syntax

```
show running-config current-context
```

Description

Shows the current non-default configuration running on the switch in the current command context.

Command context

`config` or a child of `config`. See Usage.

Authority

Administrators or local user group members with execution rights for this command.

Usage

You can enter this command from the following configuration contexts:

- Any child of the global configuration (`config`) context. If the child context has instances—such as interfaces—you can enter the command in the context of a specific instance.
Support for this command is provided for one level below the `config` context. For example, entering this command for a child of a child of the `config` context not supported.
If you enter the command on a child of the `config` context, the current configuration of that context and the children of that context are displayed.
- The global configuration (`config`) context.
If you enter this command in the global configuration (`config`) context, it shows the running configuration of the entire switch. Use the `show running-configuration` command instead.

Examples

Showing the running configuration for the current interface:

```

switch(config-if)# show running-config current-context
interface 1/1/1
  vsx-sync qos vlans
  no shutdown
  description Example interface
  no routing

```

```
vlan access 1
exit
```

Showing the current running configuration for the management interface:

```
switch(config-if-mgmt) # show running-config current-context
interface mgmt
  no shutdown
  ip static 10.0.0.1/24
  default-gateway 10.0.0.8
  nameserver 10.0.0.1
```

Showing the running configuration for the external storage share named `nasfiles`:

```
switch(config-external-storage-nasfiles) # show running-config current-context
external-storage nasfiles
  address 192.168.0.1
  vrf default
  username nasuser
  password ciphertext AQBapalKj+XMsZumHEwIc9OR6YcOw5Z6Bh9rV+9ZtKDKzvbaBAAAAB1CTrM=
  type scp
  directory /home/nas
  enable
switch(config-external-storage-nasfiles) #
```

Showing the running configuration for a context that does not have instances:

```
switch(config-vsx) # show run current-context
vsx
  inter-switch-link 1/1/1
  role secondary
  vsx-sync sflow time
```

show startup-config

Syntax

```
show startup-config [json]
```

Description

Shows the contents of the startup configuration.



NOTE: Switches in the `factory-default` configuration do not have a startup configuration to display.

Command context

Manager (#)

Parameters

json

Display output in JSON format.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Showing the startup-configuration in non-JSON format:

```
switch# show startup-config
Startup configuration:
!
!Version ArubaOS-CX XL.xx.xx.xxxx
!export-password: default
hostname BLDG03-F1
user admin group administrators password ciphertext AQBapfYzQNiCPJ/
JNSu7YNfaCzlWEnWFlwLfkARd8OG6yPpcYgAAABXRe9joTRtF1S1b4b09teMfMN3POKdQk+
br6SjSXGG40BB3ilZ8ym9qqSRkr84FEdq6w5uR2IGciVC5tBnZMrWCim0KR20XcQ5rFj/TMBvTkHq8bJpSYG8nMh
module 1/3 product-number j1365a
module 1/1 product-number j1363a
module 1/2 product-number j1363a
cli-session
    timeout 0
!
!
!
ssh server vrf mgmt
ssh certified-algorithms-only
!
!
!
!
vlan 1,195,197-200,4000
interface mgmt
    no shutdown
    ip static 10.6.9.24/24
    default-gateway 10.6.9.1
interface 1/1/1
    no shutdown
    no routing
    vlan trunk native 1
    vlan trunk allowed 1,197-200
interface vlan200
    ip address 10.3.200.3/24
ip route 0.0.0.0/0 10.3.200.1
https-server rest access-mode read-write
https-server vrf mgmt
```

Showing the startup-configuration in JSON format:

```
switch# show startup-config json
Startup configuration:
{
  "AAA_Server_Group": {
    "local": {
      "group_name": "local"
    },
    "none": {
      "group_name": "none"
    }
  },
  ...
}
```

show system

Syntax

```
show system [vsx-peer]
```

Description

Shows general status information about the system.

Command context

Operator (>) or Manager (#)

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

CPU utilization represents the average utilization across all the CPU cores.

System Contact, System Location, and System Description can be set with the `snmp-server` command.

Examples

Showing system information:

```
switch# show system
  Hostname           : switch
  System Description : My switch
  System Contact     : John Doe
  System Location    : ROS-R3-UPR-R10

  Vendor            : Aruba
  Product Name       : 8400 Base Cbl Mgr X462 Bndl
  Chassis Serial Nbr : SGYMK2G001
  Base MAC Address   : 00:00:5E:00:53:05
  ArubaOS-CX Version : XL.10.xx.xxxx

  Time Zone          : America/Los_Angeles (PDT, -0700)

  Up Time             : up 1 week, 5 hours, 28 minutes
  CPU Util (%)        : 5
  Memory Usage (%)    : 35
```

show system error-counter-monitor

Syntax

```
show system error-counter-monitor {basic <PORT-NUM> | extended} [vsx-peer]
```

Description

Shows error counter statistics.

Command context

Manager (#)

Parameters

basic <PORT-NUM>

Specifies a physical port on the switch. Use the format member/slot/port (for example, 1/3/1).

extended

Shows statistics for all interfaces.

Command context

Manager (#)

Examples

Showing error counter statistics for interface 1/1/1:

```
switch# show system error-counter-monitor basic 1/1/1
```

Interface error counter statistics for 1/1/1

Error Counter	Value
-----	-----
EtherStatsOversizePkts	983
EtherStatsUndersizePkts	1024
EtherStatsJabbers	10
Dot3StatsAlignmentErrors	462
Dot3StatsFCSErrors	321
Dot3StatsLateCollisions	2024
EtherStatsFragments	121
Dot3StatsExcessiveCollisions	1025
IfInBroadcastPkts	2001

Showing error counter statistics for all interfaces:

```
switch# show system error-counter-monitor extended
```

Interface error counter statistics for 1/1/1

Error Counter	Value
-----	-----
EtherStatsOversizePkts	983
EtherStatsUndersizePkts	1024
EtherStatsJabbers	10
Dot3StatsAlignmentErrors	462
Dot3StatsFCSErrors	321
Dot3StatsLateCollisions	2024
EtherStatsFragments	121
Dot3StatsExcessiveCollisions	1025
IfInBroadcastPkts	2001

...
...

Interface error counter statistics for 1/8/32

Error Counter	Value
-----	-----
EtherStatsOversizePkts	0
...	

show system resource-utilization

Syntax

```
show system resource-utilization [daemon <DAEMON-NAME> | module <SLOT-ID>] [vsx-peer]
```

Description

Shows information about the usage of system resources such as CPU, memory, and open file descriptors.

Command context

Manager (#)

Parameters

daemon <DAEMON-NAME>

Shows the filtered resource utilization data for the process specified by <DAEMON-NAME> only.



NOTE: For a list of daemons that log events, enter `show events -d ?` from a switch prompt in the manager (#) context.

module <SLOT-ID>

Shows the filtered resource utilization data for the line module specified by <SLOT-ID> only.

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Showing all system resource utilization data:

```
switch# show system resource-utilization
System Resources:
Processes: 70
CPU usage(%): 20
Memory usage(%): 25
Open FD's: 1024
```

Process	CPU Usage(%)	Memory Usage(%)	Open FD's
pmd	2	1	14
hpe-sysmond	1	2	11
hpe-mgmdd	0	1	5
...			

Showing the resource utilization data for the pmd process:

```
switch# show system resource-utilization daemon pmd
Process      CPU Usage      Memory Usage      Open FD's
-----
pmd           2              1              14
```

Showing resource utilization data when system resource utilization polling is disabled:


```
switch# show system resource-utilization
System resource utilization data poll is currently disabled
```

Showing resource utilization data for a line module:

```
switch# show system resource-utilization module 1/1
System Resource utilization for line card module: 1/1
CPU usage(%): 0
Memory usage(%): 35
Open FD's: 512
```

show tech

Syntax

```
show tech [basic | <FEATURE>] [local-file]
```

Description

Shows detailed information about switch features by automatically running the `show` commands associated with the feature. If no parameters are specified, the `show tech` command shows information about all switch features. Technical support personnel use the output from this command for troubleshooting.

Command context

Manager (#)

Parameters

basic

Specifies showing a basic set of information.

<FEATURE>

Specifies the name of a feature. For a list of feature names, enter the `show tech` command, followed by a space, followed by a question mark (?).

local-file

Shows the output of the `show tech` command to a local text file.

Authority

Administrators or local user group members with execution rights for this command.

Usage

To terminate the output of the `show tech` command, enter **Ctrl+C**.

If the command was not terminated with **Ctrl+C**, at the end of the output, the `show tech` command shows the following:

- The time consumed to execute the command.
- The list of failed `show` commands, if any.

To get a copy of the local text file content created with the `show tech` command that is used with the `local-file` parameter, use the `copy show-tech local-file` command.

Example

Showing the basic set of system information:

```

switch# show tech basic
=====
Show Tech executed on Wed Sep  6 16:50:37 2017
=====
[Begin] Feature basic
=====

*****
Command : show core-dump all
*****
no core dumps are present

...

[End] Feature basic
=====

1 show tech command failed
=====
Failed command:
  1. show boot-history
=====
Show tech took 3.000000 seconds for execution

```

Directing the output of the **show tech basic** command to the local text file:

```

switch# show tech basic local-file
Show Tech output stored in local-file. Please use 'copy show-tech local-file'
to copy-out this file.

```

show usb

Syntax

show usb

Description

Shows the USB port configuration and mount settings.

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

If USB has not been enabled:

```
switch> show usb
Enabled: No
Mounted: No
```

If USB has been enabled, but no device has been mounted:

```
switch> show usb
Enabled: Yes
Mounted: No
```

If USB has been enabled and a device mounted:

```
switch> show usb
Enabled: Yes
Mounted: Yes
```

show usb file-system

Syntax

```
show usb file-system [<PATH>]
```

Description

Shows directory listings for a mounted USB device. When entered without the <PATH> parameter the top level directory tree is shown.

Command context

Operator (>) or Manager (#)

Parameters

<PATH>

Specifies the file path to show. A leading "/" in the path is optional.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

Adding a leading "/" as the first character of the <PATH> parameter is optional.

Attempting to enter '..' as any part of the <PATH> will generate an invalid path argument error. Only fully-qualified path names are supported.

Examples

Showing the top level directory tree:

```
switch# show usb file-system
/mnt/usb:
'System Volume Information'  dir1'

/mnt/usb/System Volume Information':
IndexerVolumeGuid  WPSettings.dat

/mnt/usb/dir1:
dir2  test1
```

```
/mnt/usb/dir1/dir2:  
test2
```

Showing available path options from the top level:

```
switch# show usb file-system /  
total 64  
drwxrwxrwx 2 32768 Jan 22 16:27 'System Volume Information'  
drwxrwxrwx 3 32768 Mar 5 15:26 dir1
```

Showing the contents of a specific folder:

```
switch# show usb file-system /dir1  
total 32  
drwxrwxrwx 2 32768 Mar 5 15:26 dir2  
-rwxrwxrwx 1 0 Feb 5 18:08 test1  
  
switch# show usb file-system dir1/dir2  
total 0  
-rwxrwxrwx 1 0 Feb 6 05:35 test2
```

Attempting to enter an invalid character in the path:

```
switch# show usb file-system dir1/../../../../  
Invalid path argument
```

show version

Syntax

```
show version [vsx-peer]
```

Description

Shows version information about the network operating system software, service operating system software, and BIOS.

Command context

Operator (>) or Manager (#)

Parameters

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing version information:

```
switch> show version  
-----  
ArubaOS-CX  
(c) Copyright 2020 Hewlett Packard Enterprise Development LP
```

```
-----
Version       : XL.xx.xx.xxxx
Build Date    : 2020-07-24 11:14:15 PDT
Build ID      : ArubaOS-CX:XL.xx.xx.xxxx:2b4032a4282b:201707241803
Build SHA     : 2b4032a4282b47ab94ea92a1436e1194f34bb5ba
Active Image  : secondary

Service OS Version : GT.01.01.0010
BIOS Version      : GT-01-0020
```

system error-counter-monitor

Syntax

```
system error-counter-monitor
```

```
no system error-counter-monitor
```

Description

Enables the system error counter monitoring feature, which records error counter data every 10 seconds. Default: Disabled.

The `no` form of the command disables error counter monitoring and stops the recording of error counter data.

Command context

```
config
```

Authority

Administrators or local user group members with execution rights for this command.

Example

Enabling the system error counter monitor:

```
switch(config)# system error-counter-monitor
```

system error-counter-monitor poll-interval

Syntax

```
system error-counter-monitor poll-interval <INTERVAL>
```

Description

Sets the polling interval used for the collection and recording of error counter data.

Command context

```
config
```

Parameters

<INTERVAL>

Specifies the poll interval in seconds. Range: 10 to 3600. Default: 10.

Authority

Administrators or local user group members with execution rights for this command.

Example

Setting the system error counter monitor poll interval:

```
switch(config)# system error-counter-monitor poll-interval 20
```

system resource-utilization poll-interval

Syntax

```
system resource-utilization poll-interval <SECONDS>
```

Description

Configures the polling interval for system resource information collection and recording such as CPU and memory usage.

Command context

```
config
```

Parameters

<SECONDS>

Specifies the poll interval in seconds. Range: 10-3600. Default: 10.

Authority

Administrators or local user group members with execution rights for this command.

Example

Configuring the system resource utilization poll interval:

```
switch(config)# system resource-utilization poll-interval 20
```

top cpu

Syntax

```
top cpu
```

Description

Shows CPU utilization information.

Command context

Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing top CPU information:

```
switch# top cpu
top - 09:42:55 up 3 min, 3 users, load average: 3.44, 3.78, 1.70
Tasks: 76 total, 2 running, 74 sleeping, 0 stopped, 0 zombie
%Cpu(s): 31.4 us, 32.7 sy, 0.5 ni, 34.4 id, 04. wa, 0.0 hi, 0.6 si, 0.0 st
KiB Mem : 4046496 total, 2487508 free, 897040 used, 661948 buff/cache
KiB Swap: 0 total, 0 free, 0 used, 2859196 avail Mem

  PID USER      PRI  NI   VIRT   RES   SHR S  %CPU  %MEM     TIME+ COMMAND
...
```

top memory

Syntax

```
top memory
```

Description

Shows memory utilization information.

Command context

Manager (#)

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Example

Showing top memory:

```
switch> top memory
top - 09:42:55 up 3 min, 3 users, load average: 3.44, 3.78, 1.70
Tasks: 76 total, 2 running, 74 sleeping, 0 stopped, 0 zombie
%Cpu(s): 31.4 us, 32.7 sy, 0.5 ni, 34.4 id, 04. wa, 0.0 hi, 0.6 si, 0.0 st
KiB Mem : 4046496 total, 2487508 free, 897040 used, 661948 buff/cache
KiB Swap: 0 total, 0 free, 0 used, 2859196 avail Mem

  PID USER      PRI  NI   VIRT   RES   SHR S  %CPU  %MEM     TIME+ COMMAND
...
```

usb

Syntax

```
usb
```

```
no usb
```

Description

Enables the USB ports on the switch. This setting is persistent across switch reboots and management module failovers. Both active and standby management modules are affected by this setting.

The `no` form of this command disables the USB ports.

Command context

config

Authority

Administrators or local user group members with execution rights for this command.

Example

Enabling USB ports:

```
switch(config)# usb
```

Disabling USB ports when a USB drive is mounted:

```
switch(config)# no usb
```

usb mount | unmount

Syntax

```
usb {mount | unmount}
```

Description

Enables or disables the inserted USB drive.

Command context

Manager (#)

Parameters

mount

Enables the inserted USB drive.

unmount

Disables the inserted USB drive in preparation for removal.

Authority

Administrators or local user group members with execution rights for this command.

Usage

If USB has been enabled in the configuration, the USB port on the active management module is available for mounting a USB drive. The USB port on the standby management module is not available.

An inserted USB drive must be mounted each time the switch boots or fails over to a different management module.

A USB drive must be unmounted before removal.

The supported USB file systems are FAT16 and FAT32.

Examples

Mounting a USB drive in the USB port:

```
switch# usb mount
```


Unmounting a USB drive:

```
switch# usb unmount
```

The switch has limited capacity to store data, collected by switch features and protocols. You can provide virtually unlimited storage capacity by adding user-supplied external storage volumes. Supported volume types and storage protocols include: NFSv3, NFSv4, and SCP (sshfs).

One application of external storage is the saving and restoring of DHCP lease files over SCP or NFS network attached storage systems. SCP file system protocol uses a user mode process to emulate a network file system. The key advantage is packet level encryption and simple configuration. The key disadvantage is slow performance.

You can set up external storage volume credentials and then enable it. A storage management process acts on your requests by enabling the storage volume using the requested storage protocol. You can disable the external storage volume or set it up but leave it disable.

The feature maintains storage volume state. The states are: **disabled** (down), **connecting** (establishing connection), **operational** (up), and **unaccessible** (unavailable).

If a storage volume is unavailable, the system attempts to reconnect periodically. Multiple volumes could connect concurrently. If one connection times out the others can connect immediately.

The system supports server connection through data and management ports.

Data port support requires server IP address on a default VRF.

Once a storage volume is enabled, applications can use the volume to store retrieve and delete files and directories.

External storage commands

address

Syntax

```
address {<IPV4-ADDR> | <IPV6-ADDR> | hostname <HOSTNAME>}
```

```
no address {<IPV4-ADDR> | <IPV6-ADDR> | hostname <HOSTNAME>}
```

Description

Specifies the NAS IP address or hostname.

The `no` form of this command deletes an IP address or hostname.

Command context

```
config-external-storage-<VOLUME-NAME>
```

Parameters

<IPV4-ADDR>

Specifies the NAS server IPv4 address, Global.

<IPV6-ADDR>

Specifies the IPv6 address of the NAS server.

<HOSTNAME>

Specifies the hostname of the NAS server. String.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating the logfiles storage volume with IP address 10.1.1.1:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# address 10.1.1.1
```

Deleting an external storage volume named logfiles:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# no address 10.1.1.1
```

directory

Syntax

`directory <DIRECTORY-NAME>`

`no directory <DIRECTORY-NAME>`

Description

Selects an existing directory on the external storage volume.

The `no` form of this command clears a directory of an external storage volume.

Command context

`config-external-storage-<VOLUME-NAME>`

Parameters

<DIRECTORY-NAME>

Specifies the external storage directory for mapping the volume.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Creating a volume named logfiles that is mapped under /home on the server:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# directory /home
```

Clearing the directory /home:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# no directory /home
```

disable

Syntax

disable

no disable

Description

Disables the external storage volume.

The `no` form of this command enables the external storage volume. This is identical to the `enable` command.

Command context

config-external-storage-<VOLUME-NAME>

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Disabling a volume named logfiles:

```
switch(config)# external-storage logfiles
switch(config-external-storage-logfiles)# disable
```

enable

Syntax

enable

no enable

Description

Enables the external storage volume.

The `no` form of this command disables the external storage volume. This is identical to the `disable` command.

Command context

config-external-storage-<VOLUME-NAME>

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Examples

Creating and then enabling a volume named logfiles:

```
switch(config)# external-storage logfiles
switch(config-external-storage-logfiles)# enable
```

Disables the external storage volume:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# disable
```

external-storage

Syntax

```
external-storage <VOLUME-NAME>
```

```
no external-storage <VOLUME-NAME>
```

Description

Creates or updates an external storage volume.

The `no` form of this command deletes an external storage volume.

Command context

config

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating the logfile storage volume:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)#
```

Deleting the logfile storage volume:

```
switch(config)# no external-storage logfiles
```

password

Syntax

```
password {plaintext | ciphertext} <PASSWORD>
```

```
no password {plaintext | ciphertext} <PASSWORD>
```

Description

Sets the password for logging in to a network attached storage server.

The `no` form of this command clears the password for logging in to a network attached storage server.

Command context

config-external-storage-<VOLUME-NAME>

Parameters

plaintext

Specifies the password be in plain text format.

ciphertext

Specifies the password be in ciphertext format.

<PASSWORD>

Specifies the password.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating a volume named logfile with the password xxxx:

```
switch(config)# external-storage logfile
switch(config-external-storage-logfiles)# password plaintext xxxx
```

Clearing the plaintext password xxxx:

```
switch(config)# external-storage logfile
switch(config-external-storage-logfiles)# no password plaintext xxxx
```

show external-storage

Syntax

```
show external-storage [<VOLUME-NAME>]
```

Description

Shows external storage configuration and state for all volumes or for a specified volume.

Command context

Operator (>) or Manager (#)

Parameters

<VOLUME-NAME>

Specifies the external storage volume name that the show command will use.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch# show external-storage
```

	Address	VRF	Username	Type	Directory	State
nfsvol	10.1.1.1	nas	---	NFSv3	/home	operational
nfsfiles	20.1.1.1	nas	netstorage	NFSv4	/netstor	disabled
scpdev	nasserver	nas	scpstor	SCP	/scp	unaccessible

show running-config external-storage

Syntax

```
show running-config external-storage
```

Description

Shows the running configuration of the external storage.

Command context

Operator (>) or Manager (#)

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch# show running-config external-storage
```

```
external-storage nfsvol
  address 10.1.1.1
  vrf     nas
  type    nfsv4
  directoty /home
  enable
external-storage scpdev
  address 30.1.1.1
  vrf     nas
  username switchuser
  password ciphertext xxx
  type    scp
  directoty /home
  enable
```

type

Syntax

```
type {nfsv3 | nfsv4 | scp}
```

```
no type {nfsv3 | nfsv4 | scp}
```

Description

Sets the network attached storage access type for reaching the external storage volume.

The `no` form of this command deletes an external storage volume.

Command context

```
config-external-storage-<VOLUME-NAME>
```

Parameters

nfsv3

Specifies the NFSv3 network access protocol.

nfsv4

Specifies the NFSv4 network access protocol.

scp

Specifies the SCP network access protocol.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating the logfiles volume using NFSV4:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# type nfsv4
```

Clearing the external storage access type:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# no type nfsv4
```

username

Syntax

username <USER-NAME>

no username <USER-NAME>

Description

Sets the username for logging in to a network attached storage server.

The no form of this command clears a username.

Command context

config-external-storage-<VOLUME-NAME>

Parameters

<USER-NAME>

Specifies the username.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating a volume named logfiles with the user name nassuser:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# username nasuser
```

Clearing the user name nasuser from accessing the logfiles volume:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# no username nasuser
```


vrf

Syntax

```
vrf <VRF-NAME>
```

```
no vrf <VRF-NAME>
```

Description

Setting a VRF to reach network attached storage.

The `no` form of this command clears access of a VRF to network attached storage.

Command context

```
config-external-storage-<VOLUME-NAME>
```

Parameters

<VRF-NAME>

Specifies the VRF name.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating the logfiles volume and setting a VRF named `nas` to access the network attached storage:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# vrf nas
```

Clearing access of a VRF named `nas` to the network attached storage:

```
switch(config)# external-storage logfiles  
switch(config-external-storage-logfiles)# no vrf nas
```

The IP Service Level Agreement (IP-SLA) is a feature that enables the measuring of network performance between two nodes in a network for different service level agreement parameters such as round-trip time (RTT), one-way delay, jitter, reachability, packet loss, and voice quality scores. These two nodes can span across area in access, distribution or core inside a LAN as well as across WAN between core to core or core to Data Centre switches. This feature helps you measure the SLA for different protocols or applications such as UDP echo, UDP jitter (for voice and video), TCP connect, HTTP, and ICMP echo. This guide provides details for managing and monitoring different types of IP-SLAs.

IP-SLA guidelines

- ArubaOS-CX supports only SLA configuration through CLI and thresholds can be configured using NAE agents using WebUI/REST.
- ArubaOS-CX supports only forever tests. On-demand tests are not supported.
- Maximum sessions: IP-SLA source 500, IP-SLA responder 100.
- NAE can effectively monitor a maximum of 300 parameters, reducing the maximum supported session by 300.
- NAE supports only syslog.
- NAE agents must be triggered for each IP-SLA test on every switch.
- If multiple IP addresses are received for a DNS query, DNS works with the first resolved IP.
- When the DNS server IP is not configured, the first DNS server in `resolve.conf` is used.
- The source interface/IP option is not applicable for SLAs configured on 'mgmt' VRF, as it has only one interface.
- A system time change because of NTP or a manual change causes an incorrect calculation.
- There is no interoperability of UDP echo SLA between ArubaOS-CX and FlexFabric switches.
- Source IP and source port combination must be unique across SLA sessions in a same switch.
- Do not use the same source port across the source and responder sessions in a switch.
- NTP synchronization is a must for SLA types involving one-way delay such as UDP jitter VoIP.
- It is mandatory to set default CoPP to the max value when UDP jitter SLA is enabled otherwise 100% packet loss can be seen and `UDP-Jitter sla` probe will result in failure as seen in the following example.

```
copp-policy default
  class hypertext priority 6 rate 50000 burst 64
  default-class priority 6 rate 99999 burst 9999
```

- Deviations with respect to PVOS results: The packet losses due to internal switch-related issues like interface shutdown or interface flaps will not be considered as 'Probes Timed-out error', as the IP-SLA

solution is to measure network performance and anomalies. Rather, this kind of packet loss will be counted in internal counters like 'Destination address unreachable'.

Limitations with VoIP SLAs

- A maximum of 80 concurrent VoIP SLAs can be scheduled in a 20 second slot.
- A single VoIP probe takes 20 seconds to complete.
- The default and minimum probe interval for VoIP SLA is 120 seconds.
- SLAs scheduled in the same slot, periodically sends 1000 probe packets for 120 seconds in 20 second intervals.
- Default 120 second probe interval is divided in to 6 slots of 20 seconds to avoid synchronization of all configured VoIP SLAs sending probes at the same time.
- SLAs started at the same time exceeding the concurrent limit of 80 must wait for the next 20 second VoIP slot to open before moving to 'running' state.
- The maximum number of VoIP SLAs supported is 80 X 6 slots = 480 SLAs.
- SLAs exceeding 480 will continue to remain in the 'waiting for VoIP slot' until any slot is freed by stopping the running SLA.
- To avoid high RTT, a single switch with more than 20 SLAs should not have single responder SLA.
- When IP is received dynamically (e.g. using DHCP) for interfaces other than management interface, IPSLA source or responder has to be configured only using interface name.

IP-SLA commands

http

Syntax

```
http {get | raw} URL [source {<SOURCE-IPV4-ADDR> | <IFNAME>} source-port <PORT-NUM>]  
    [proxy proxy-url] [cache disable] [name-server <IPV4-ADDR-DNS-SERVER>]  
    [probe-interval <30-604800>] [version<VERSION-NUMBER>] [http-raw-request <RAW-PAYLOAD>]
```

Description

Configures HTTP as the IP-SLA test mechanism. Requires destination URL and type of HTTP request (raw/get).

Command context

```
config-ip-sla-<IP-SLA-NAME>
```

Parameters

{get | raw}

Selects HTTP request type as GET or RAW where the system will generate or provide HTTP payload.

URL

Specifies HTTP URL address of syntax. http://<HOST NAME/IP-ADDRESS>:<PORT>/<PATH>.

source {<SOURCE-IPV4-ADDR> | <IFNAME>}

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

source-port <PORT-NUM>

Specifies the value of the source port for the IP-SLA probes.

cache disable

Selects cache option for the HTTP server. By default the option is enabled.

name-server <IPV4-ADDR-DNS-SERVER>

Specifies the IPv4 address of DNS server.

probe-interval <PROBE-INTERVAL>

Specifies the probe interval in seconds. Range: 30 to 604800.

version <VERSION-NUMBER>

Specifies the source interface to use for sending IP-SLA probes.

http-raw-request <RAW-PAYLOAD>

HTTP raw request. String.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config-ipsla-1)# http get http://device.arubanetworks.com/root/home.html
switch(config-ipsla-1)# http raw http://device.arubanetworks.com/root/home.html
switch(config-ipsla-1)# http 2.2.2.2 source 1/1/1
switch(config-ipsla-1)# http http://device.arubanetworks.com source 2.2.2.1
switch(config-ipsla-1)# http http://device.arubanetworks.com/root/home.html source-interface 1/1/1
switch(config-ipsla-1)# http http://device.arubanetworks.com name-server 10.10.10.2
switch(config-ipsla-1)# http raw raw-request "GET /en/US/hmpgs/index.html HTTP/1.0\r\n\r\n"
```

icmp-echo

Syntax

```
icmp-echo {<DEST-IPV4-ADDR>|<HOSTNAME>} [source {<SOURCE-IPV4-ADDR> | <IFNAME>}]
[name-server <IPV4-ADDR-DNS-SERVER>] [payload-size <PAYLOAD-SIZE>]
[tos <TYPE-OF-SERVICE>] [probe-interval <PROBE-INTERVAL>]
```

Description

Configures ICMP echo as the IP-SLA test mechanism. Requires destination address for the IP-SLA test.

Command context

config-ip-sla-<IP-SLA-NAME>

Parameters

{<DEST-IPV4-ADDR> | <HOSTNAME>}

Selects the destination IPv4 address for the IP-SLA or the hostname of the destination.

[source {<SOURCE-IPV4-ADDR> | <IFNAME>}]

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

name-server <IPV4-ADDR-DNS-SERVER>

Specifies the DNS server for destination hostname resolution.

payload-size <PAYLOAD-SIZE>

Specifies the payload size of an SLA probe. Range: 0 to 1440.

tos <TYPE-OF-SERVICE>

Specifies the type of serve to be used in the probe packets. Range: 0 to 255.

probe-interval <PROBE-INTERVAL>

Specifies the probe interval in seconds. Range: 5 to 604800.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# ip-sla test
switch(config-ip-sla-test)# icmp-echo 2.2.2.2
switch(config-ip-sla-test)# icmp-echo 2.2.2.2 source 3.3.3.3
switch(config-ip-sla-test)# icmp-echo 2.2.2.2 source 3.3.3.3 payload-size 400
switch(config-ip-sla-test)# icmp-echo 2.2.2.2 source 3.3.3.3 payload-size 400 name-server 4.4.4.4
switch(config-ip-sla-test)# icmp-echo 2.2.2.2 source 3.3.3.3 payload-size 400 name-server 4.4.4.4 probe-interval 80
```

ip-sla

Syntax

ip-sla <IP-SLA-NAME>

no ip-sla <IP-SLA-NAME>

Description

Creates an IP Service Level Agreement (SLA) profile and switches to the `config-ip-sla` context.

The `no` form of this command deletes an IP-SLA profile. By default, all profile use the default VRF (default).

Command context

`config`

Parameters

<IP-SLA-NAME>

Specifies an IP-SLA profile name. Length: 1 to 63 characters.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating an IP-SLA:

```
switch(config)# ip-sla 1
switch(config-ip-sla-1)#
```

Deleting an IP-SLA:

```
switch(config)# no ip-sla 1
switch(config)#
```

ip-sla responder

Syntax

```
ip-sla responder <SLA-NAME> {udp-echo | tcp-connect | udp-jitter-voip} <PORT-NUM>
    [source {<SOURCE-IPV4-ADDR> | <IFNAME>}][vrf <VRF-NAME>]
no ip-sla responder <SLA-NAME>
```

Description

Selects the IP-SLA responder. The responder can be configured for udp-echo, tcp-connect, udp-jitter-voip type. It requires the SLA name, SLA type, and port number as arguments. Source IP/interface ID is a must for type udp-jitter-voip and optional for other types.

The **no** form of this command removes the IP-SLA responder.

Command context

config

Parameters

<SLA-NAME>

Specifies the SLA name.

udp-echo

Enables responder for udp-echo probes.

tcp-connect

Selects TCP connect as the IP-SLA test mechanism.

vrf <VRF-NAME>

Specifies the name of the VRF to use.

udp-jitter-voip

Selects VOIP jitter as the IP-SLA test mechanism.

<PORT-NUM>

Specifies the port number to listen for IP-SLA probes. Range: 1 to 65535.

[source {<SOURCE-IPV4-ADDR> | <IFNAME>}]

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# ip-sla responder SLA1 udp-echo 8000 source 2.2.2.2
switch(config)# ip-sla responder SLA1 udp-echo 8000 source 1/1/1
```

```
switch(config)# no ip-sla responder <SLA-NAME>
```

show ip-sla responder

Syntax

```
show ip-sla responder <SLA-NAME>
```

Description

Shows the given IP-SLA responder configuration and operation status.

Command context

```
config
```

Parameters

<SLA-NAME>

Specifies the SLA name.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# show ip-sla responder SLA3
```

```
SLA Name           : SLA3
IP-SLA Type        : Udp-echo
VRF                 : Default
Responder Port      : 8000
Responder IP        : 2.2.2.3
Responder Interface : 1/1/1
Responder Status    : Running
```

show ip-sla responder results

Syntax

```
show ip-sla responder <SLA-NAME> <SOURCE-IPV4-ADDR> <PORT-NUM> results
```

Description

Shows the given ip-sla responder statistics for a given source IP and port. This command is only applicable for the sources where source IP and port are configured.

Command context

```
config
```

Parameters

<SLA-NAME>

Specifies the SLA name.

<SOURCE-IPV4-ADDR>

Specifies the source IPV4 address.

<PORT-NUM>

Specifies the port number. Range: 1 to 65535.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch# show ip-sla responder SLA1 2.2.2.1 8000 results
```

```
IP-SLA Type       : Udp-echo
VRF Name          : Default
Source IP         : 2.2.2.1
Source Port       : 8000
Responder Port    : 8888
Responder IP      : 2.2.2.3
Responder Interface :
Responder Status  : Running
Packets Received  : 2
Packets Sent      : 2
```

show ip-sla <SLA-NAME>

Syntax

```
show ip-sla <SLA-NAME> results
```

Description

Shows the given IP-SLA source configuration and status.

Command context

Operator (>) or Manager (#)

Parameters

<SLA-NAME>

Specifies the SLA name.

results

Shows the statistics calculated for an SLA type.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch# show ip-sla xyz results
```

```
IP-SLA session status
IP-SLA Name           : xyz
IP-SLA Type           : tcp-connect
Destination Host Name/IP Address: 2.2.2.1
Destination Port      : 8888
Source IP Address/IFName : 2.2.2.2
Source Port           : 5555
Status                : Running
```

```
IP-SLA session cumulative counters
Total Probes Transmitted : 1
Probes Timed-out         : 0
Bind Error               : 0
Destination Address Unreachable : 0
DNS Resolution Failures  : 0
Reception Error          : 0
Transmission Error       : 0
```

```
IP-SLA Latest Probe Results
```



```

      Last Probe Time           : 2018 Jul 13 02:00:35
      Packets Sent              : 1
      Packets Received          : 1
      Packet Loss in Test       : 0.0000%

      Minimum RTT(ms)           : 0.7900
      Maximum RTT(ms)           : 0.7900
      Average RTT(ms)           : 0.7900
      DNS RTT(ms)               : 0.0000
      TCP RTT(ms)               : 0.9710

switch(config)# show ip-sla xyz
      IP-SLA Name               : xyz
      Status                    : scheduled
      IP-SLA Type               : tcp-connect
      VRF                       : ipslasrc
      Source Port               : 5555
      Source IP                 : 2.2.2.2
      Source Interface          :
      Domain Name Server        :
      Probe interval(seconds)   : 90

switch(config)# show ip-sla jitter-sla results
      IP-SLA session status
      IP-SLA Name               : jitter-sla
      IP-SLA Type               : udp-jitter-voip
      Destination Host Name/IP Address: 2.2.2.1
      Destination Port          : 8888
      Source IP Address/IFName  :
      Source Port               : 5555
      Status                    : Running

      IP-SLA Session Cumulative Counters
      Total Probes Transmitted   : 1
      Probes Timed-out          : 0
      Bind Error                 : 0
      Destination Address Unreachable : 0
      DNS Resolution Failures    : 0
      Reception Error           : 0
      Transmission Error        : 0

      IP-SLA Latest Probe Results
      Last Probe Time           : 2018 Jul 13 02:02:48
      Packets Sent              : 1
      Packets Received          : 1
      Packet Loss in Test       : 0.0000%

      Minimum RTT(ms)           : 0.7900
      Maximum RTT(ms)           : 0.7900
      Average RTT(ms)           : 0.7900
      DNS RTT(ms)               : 0.0000

      Min Positive SD            : 1      Min Positive DS            : 2
      Max Positive SD            : 1      Max Positive DS            : 2
      Positive SD Number         : 2      Positive DS Number        : 2
      Positive SD Sum            : 2      Positive DS Sum           : 4
      Positive SD Average        : 5      Positive DS Average       : 5
      Min Negative SD           : 1      Min Negative DS           : 1
      Max Negative SD           : 1      Max Negative DS           : 1
      Negative SD Number         : 2      Negative DS Number        : 4
      Negative SD Sum            : 2      Negative DS Sum           : 4
      Negative SD Average        : 5      Negative DS Average       : 5

      Max SD Delay               : 0      Max DS Delay              : 0
      Min SD Delay               : 0      Min DS Delay              : 0
      Average SD Delay           : 0      Average DS Delay          : 0

      Voice Scores:
      MOS Score                  : 4.38   ICPIF                      : 0

switch(config)# show ip-sla m3op
      IP-SLA Name               : jitter-sla
      Status                    : Running
      IP-SLA Type               : udp-jitter-voip
      VRF                       : ipslasrc
      Source IP                 : 2.2.2.2
      Source Interface          :
      Domain Name Server        :
      TOS                       : 10
      Probe Interval(seconds)   : 90
      Advantage Factor          : 0
      Codec Type                : g711a

```

```

switch(config)# show ip-sla http-sla
  IP-SLA Name       : http-sla
  Status            : Running
  IP-SLA Type       : http
  VRF               : ipslasrc
  Source IP         : 2.2.2.2
  Source Interface  :
  Domain Name Server : 10.10.10.2
  Probe Interval(seconds) : 90
  HTTP Request Type : GET
  HTTP/HTTPS URL    : abcd.com/ws/home
  Cache             : Enabled
  HTTP Proxy URL    :
  HTTP Version Number : 1.1
  ...

#### IP-SLA status description
...
| Status | Description |
|-----|-----|
| Running | SLA is fully operational |
| Bind Error | Another service is using the same source port |
| Interface Down | Interface status is not up |
| Dns Resolution Error | Failed to resolve destination hostname |
| No Route | No available route to the responder |
| Internal Error | Unexpected error prevents SLA session |
| Disabled | SLA is disabled |
| Configuration Incomplete | Configuration is not complete to enable the SLA |
...

#### IP SLA session cumulative counters description
...
| Status | Description |
|-----|-----|
| Probes Timed-out | Total numbers of probes failed to receive response. |
| Bind Error | Total numbers of probes transmission failed as source port not available. |
| Destination Address Unreachable | Total numbers of probes transmission failed due to route unavailable. |
| DNS Resolution Failures | Total numbers of probes failed due to DNS resolution failure. |
| Reception Error | Total numbers of probes failed due to internal error in reception. |
| Transmission Error | Total numbers of probes failed due to internal error in transmission. |
...

```

start-test

Syntax

```
start-test
```

Description

Starts the IP-SLA probes.

Command context

```
config-ip-sla-<IP-SLA-NAME>
```

Authority

Administrators or local user group members with execution rights for this command.

Examples

```

switch(config)# ip-sla test
switch(config-ip-sla-test)# start-test

```

stop-test

Syntax

```
stop-test
```

Description

Stops the IP-SLA probes.

Command context

config-ip-sla-<IP-SLA-NAME>

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# ip-sla test
switch(config-ip-sla-test)# stop-test
```

tcp-connect

Syntax

```
tcp-connect {<DEST-IPV4-ADDR> | <HOSTNAME>} <PORT-NUM> [source {<SOURCE-IPV4-ADDR> |
    <IFNAME>} [source-port <PORT-NUM>]] [name-server <IPV4-ADDR-DNS-SERVER>]
    [probe-interval <PROBE-INTERVAL>]
```

Description

Configures TCP connect as the IP-SLA test mechanism. Requires destination address/hostname and destination port for the IP-SLA of tcp-connect IP-SLA type.

Command context

config-ip-sla-<IP-SLA-NAME>

Parameters

{<DEST-IPV4-ADDR> | <HOSTNAME>}

Selects the destination IPv4 address for the IP-SLA or the hostname of the destination.

<PORT-NUM>

Destination port for the IP-SLA. Range: 1 to 65535.

[source {<SOURCE-IPV4-ADDR> | <IFNAME>}]

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

[source-port <PORT-NUM>]

Specifies the port for the IP-SLA test.

[name-server <IPV4-ADDR-DNS-SERVER>]

Specifies the DNS server for destination hostname resolution.

[probe-interval <PROBE-INTERVAL>]

Probe interval in seconds. Range: 30 to 604800.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config-ipsla-1)# tcp-connect 2.2.2.2 8080
switch(config-ipsla-1)# tcp-connect 2.2.2.2 8080 source 2.2.2.1 source-port 6000
switch(config-ipsla-1)# tcp-connect 2.2.2.2 8080 source 1/1/1 source-port 6000

switch(config-ipsla-1)# tcp-connect https://device.arubanetworks.com 8080
switch(config-ipsla-1)# tcp-connect https://device.arubanetworks.com 8080 source 2.2.2.1 source-port 6000
```

```
switch(config-ipsla-1)# tcp-connect https://device.arubanetworks.com 8080 source 1/1/1 source-port 6000
switch(config-ipsla-1)# tcp-connect https://device.arubanetworks.com 8080 name-server 10.10.10.2
```

udp-echo

Syntax

```
udp-echo {<DEST-IPV4-ADDR>|<HOSTNAME>} <PORT-NUM> [source {<SOURCE-IPV4-ADDR> |
<IFNAME>} [source-port <PORT-NUM>]] [name-server <IPV4-ADDR-DNS-SERVER>] [payload-size
<PAYLOAD-SIZE>] [tos <TYPE-OF-SERVICE>] [probe-interval <PROBE-INTERVAL>]
```

Description

Configures UDP echo as the IP-SLA test mechanism. Requires destination address/hostname and destination port number for the IP-SLA of udp-echo SLA type.

Command context

```
config-ip-sla-<IP-SLA-NAME>
```

Parameters

{<DEST-IPV4-ADDR> | <HOSTNAME>}

Selects the destination IPv4 address for the IP-SLA or the hostname of the destination.

<PORT-NUM>

Specifies the destination port for the IP-SLA. Range: 1 to 65535.

[source {<SOURCE-IPV4-ADDR> | <IFNAME>}]

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

[source-port <PORT-NUM>]

Specifies source port for the IP-SLA test. Range: 1 to 65535.

[name-server <IPV4-ADDR-DNS-SERVER>]

Specifies the DNS server for destination hostname resolution.

[payload-size <PAYLOAD-SIZE>]

Specifies the payload size of an SLA probe. Range: 28 to 1440.

[<TYPE-OF-SERVICE>]

Type of service. Range: 0 to 255.

probe-interval <PROBE-INTERVAL>

Probe interval in seconds. Range: 5 to 604800.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080 source 2.2.2.1
switch(config-ipsla-1)# udp-echo https://device.arubanetworks.com 8080
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080 source 1/1/1
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080 source 2.2.2.1 payload-size 50
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080 source 1/1/1 payload-size 50
switch(config-ipsla-1)# udp-echo 2.2.2.2 8080 payload-size 50
switch(config-ipsla-1)# udp-echo https://device.arubanetworks.com 8080 source 2.2.2.1
```

```
payload-size 50
switch(config-ipsla-1)# udp-echo https://device.arubanetworks.com 8080 source 1/1/1
payload-size 50
switch(config-ipsla-1)# udp-echo https://device.arubanetworks.com 8080
name-server 10.10.10.2
```

udp-jitter-voip

Syntax

```
udp-jitter-voip {<DEST-IPV4-ADDR> | <HOSTNAME>} <PORT-NUM> [codec-type <CODEC-TYPE>]
[advantage-factor <VALUE>] [source {<SOURCE-IPV4-ADDR> | <IFNAME>} [source-port <PORT-NUM>]]
[name-server <IPV4-ADDR-DNS-SERVER>] [probe-interval <PROBE-INTERVAL>] [tos <TYPE-OF-SERVICE>]
```

Description

Configure UDP jitter voip as the IP-SLA test mechanism. Requires destination address/hostname and source address/interface for the IP-SLA of udp-jitter-voip IP-SLA type.

Command context

```
config-ip-sla-<IP-SLA-NAME>
```

Parameters

{<DEST-IPV4-ADDR> | <HOSTNAME>}

Selects the destination IPv4 address for the IP-SLA or the hostname of the destination.

<PORT-NUM>

Selects the port number for the IP-SLA. Range: 1 to 65535.

[codec-type <CODEC-TYPE>]

Selects the codec-type for the Voip IP-SLA test.

[advantage-factor <ADVANTAGE-FACTOR>]

Selects the value for the advantage factor. Default value is 0.

[source {<SOURCE-IPV4-ADDR> | <IFNAME>}]

Selects the source IPv4 address for SLA probes or the source interface to use for sending IP-SLA probes.

[source-port <PORT-NUM>]

Specifies the value of source port for the IP-SLA probes.

[name-server <IPV4-ADDR-DNS-SERVER>]

Specifies the DNS server for destination hostname resolution.

tos<TYPE-OF-SERVICE>

Specifies the type of service. Range: 0 to 255.

probe-interval <PROBE-INTERVAL>

Specifies the probe interval in seconds. Range: 120 to 604800.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config-ipsla-1)# udp-jitter-voip 2.2.2.2 8080 advantage-factor 10 codec-  
type g711a  
switch(config-ipsla-1)# udp-jitter-voip 2.2.2.2 8080 advantage-factor 10  
codec-type g711a source 2.2.2.1  
switch(config-ipsla-1)# udp-jitter-voip https://device.arubanetworks.com 8080  
advantage-factor 10 codec-type g711a  
switch(config-ipsla-1)# udp-jitter-voip 2.2.2.2 8080 advantage-factor 10  
codec-type g711a source 1/1/1  
switch(config-ipsla-1)# udp-jitter-voip https://device.arubanetworks.com 8080  
advantage-factor 10 codec-type g711a source 2.2.2.1  
switch(config-ipsla-1)# udp-jitter-voip https://device.arubanetworks.com 8080  
advantage-factor 10 codec-type g711a source 1/1/1  
switch(config-ipsla-1)# udp-jitter-voip https://device.arubanetworks.com 8080  
advantage-factor 10 codec-type g711a name-server 10.10.10.2 probe-interval 120  
source 10.1.1.1 source-port 8888 tos 10
```

vrf

Syntax

```
vrf <VRF-NAME>
```

```
no vrf [<VRF-NAME>]
```

Description

Configures the VRF on which the SLA will send or receive packets. By default, the default VRF is used. The `no` form of the command removes VRF from SLA.

Command context

```
config-ip-sla-<IP-SLA-NAME>
```

Parameters

<VRF-NAME>

Specifies a VRF name. Length: Default: default.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config-ip-sla-test)# vrf ipslasrc
```

```
switch(config-ip-sla-test)# no vrf
```

Mirroring allows you to replicate all traffic arriving and/or leaving the selected system interfaces. This data can be used for collection or analysis.

The traffic replicated using mirroring can be sent to a separate interface on the same switch as the traffic source for analysis or inspection. Such a collection of interfaces and settings is called a mirror session.

A mirror session can be configured with many traffic sources but only a single output, or destination. In the initial configuration, the mirror session is disabled. You have enable the feature to start the replication.



CAUTION: Care must be taken in choosing the number and rates of sources to avoid over-saturating a session destination. A mirror session with multiple 10G sources can overwhelm a single 10G destination and important data may be lost.

Mirroring and sFlow

The mirroring feature (when mirroring received traffic) and the sFlow sampling feature both require the receive (rx) capability of a given port. If both features are configured and enabled to use the receive capability on the same port, only one of the features can perform its task.

This interaction does not affect transmit (tx) mirroring because sFlow does not use the transmit (tx) capability of a port.

Behavior if sFlow is enabled and mirror enable is attempted

If sFlow is enabled on a port and a mirroring session specifies the same port as a source of received traffic (the source is configured with a direction of `rx` or `both`):

- The attempt to enable the mirroring session fails and an error is returned.
- To enable the mirroring session, first you must disable sFlow on that port.

Behavior if mirroring is enabled and sFlow enable is attempted

If a mirroring session specifies a port as a source of received traffic (the source is configured with a direction of `rx` or `both`), and you attempt to enable sFlow on the same port:

- Mirroring on that port continues.
- No error or warning message is returned when sFlow is enabled, but sFlow sampling on that port does not occur.

When sFlow is enabled on a port but sampling is not occurring, the `show sflow <INTERFACE-NAME>` command shows that sFlow is enabled but shows a value of 0 (zero) for the number of samples.

- To activate sFlow sampling on that port, you must do the following:
 1. Disable the mirroring session on the port.
 2. Disable sFlow on the port.
 3. Enable sFlow on the port.

Behavior when the startup configuration has both sFlow and rx mirroring enabled on the same port

If the startup configuration has the same port configured with both sFlow enabled and as a source of received traffic in an enabled mirroring session:

- During a boot or management module failover operation, it is not possible to predict whether the receive capability of the port will be assigned to the sFlow feature or to the mirroring feature.
- To ensure that the feature that you want is used on a specific port, after the boot operation or management module failover operation completes, disable both features on that port and then enable the feature you want to use.

Mirror statistics

Mirror statistics are reset for a Mirror-to-CPU session when an interface is added or removed from a LAG that is a source interface in the Mirror session and during a failover.

Mirror statistics are reset for a Mirror-to-CPU session on a failover.

Classifier policies and mirroring sessions

Network traffic can be mirrored to a destination interface in two ways:

- Using a mirroring session alone.
- Using Classifier Policies with mirror actions in conjunction with a mirroring session.

Basic mirroring sessions provide coarse control over the type of traffic mirrored from a source: all received, all transmitted, or both. However, a traffic class within a Classifier Policy applied to a source can provide much finer grained control of mirrored traffic. For example, a policy can match on many different aspects of the Ethernet or IPv4 or IPv6 header information in each frame or packet received or transmitted on an interface.

The steps to configure a policy and class with a mirror action are the following:

1. Configuring a mirroring session with a destination interface.
2. Enabling the mirroring session.
3. Configuring the Classifier Policy, specifying the mirroring session ID in the mirror action.

Any subsequent configuration changes to either the enabled mirroring session or the classifier policy can affect the behavior of the network monitoring that occurs. For examples, see Scenario 1 and Scenario 2.

Scenario 1

1. Mirroring session 1 is configured with destination interface 1/1/10 and source interface 1/1/5 in the `both` direction, then the session is enabled.
2. Mirroring session 2 is configured with destination interface 1/1/20, then the session is enabled.
3. Policy `Policy_2` is configured with a class matching OSPF traffic from any source IPv4 address to any destination IPv4 address and an action of `mirror`, specifying mirroring session 2.
4. `Policy_2` is applied to interface 1/1/5 in the inbound direction.

This sequence of actions creates a situation where the interface 1/1/5 is effectively configured as a source for two separate enabled mirroring sessions. This configuration is not permitted if you attempt to configure

and enable the two mirroring sessions through the CLI. However, mirroring may occur for both sessions because policies with mirror actions have priority over basic mirroring sessions.

In this example:

- Because of `Policy_2`, all OSPF traffic ingressing interface 1/1/5 is mirrored to 1/1/20, which is the destination interface of mirroring session 2.
- After `Policy_2` is applied, and because of the mirroring session 1 is enabled, all non-OSPF traffic ingressing interface 1/1/5 is mirrored to 1/1/10, which is the destination interface of mirroring session 1.
- Because `Policy_2` does not match egressing traffic, and because mirroring session 1 is enabled, all traffic egressing interface 1/1/5 is mirrored to 1/1/10, which is the destination interface of mirroring session 1.

Scenario 2

1. Mirroring session 2 is configured with destination interface 1/1/20 and source interface 1/1/3, then the session is enabled.
2. Policy `Policy_2` is configured with a class matching OSPF traffic from any source IPv4 address to any destination IPv4 address and an action of `mirror` specifying mirroring session 2.
3. `Policy_2` is applied to interface 1/1/5 in the inbound direction.

In this scenario, a single mirroring session is configured with a source interface and is configured as the target of the mirror action of a policy applied to a different source interface. In this example, the destination interface 1/1/20 receives traffic from interface 1/1/3 and from interface 1/1/5.

Mirroring commands

clear mirror

Syntax

```
clear mirror [all | <SESSION-ID>]
```

Description

Clears the mirror statistics for all configured mirror sessions or a specified session

Command context

Manager (#)

Parameters

all

Specifies all configured sessions.

<SESSION-ID>

Specifies a numeric identifier for the session. Range: 1 to 4

Authority

Administrators or local user group members with execution rights for this command.

Examples

Clearing mirror statistics for all configured mirror sessions:

```
switch# clear mirror all
```

Clearing mirror statistics for mirror session 1:

```
switch# clear mirror 1
```

comment

Syntax

```
comment <COMMENT>
```

```
no comment
```

Description

Specifies a descriptive comment for the mirroring session.

The `no` form of this command removes the comment.

Command context

```
config-mirror-<SESSION-ID>
```

Parameters

<COMMENT>

A comment string of up to 64 characters composed of letters, numbers, underscores, dashes, spaces, and periods.

Authority

Administrators or local user group members with execution rights for this command.

Usage

Comments are optional and can be added or removed at any time without affecting the state of the mirroring session.

Adding a comment to a session that already has a comment replaces the existing comment.

Examples

Adding a comment:

```
switch(config-mirror-3)# comment This Mirror will be removed during next maintenance window
```

Removing the comment for mirroring session 3:

```
switch(config-mirror-3)# no comment
```

copy tshark-pcap

Syntax

```
copy tshark-pcap <REMOTE-URL> [vrf <VRF-NAME>]
```

Description

Copies the tshark capture data to a file on a TFTP or SFTP server.

Command context

Manager (#)

Parameters

<REMOTE-URL>

Specifies the capture file on a remote TFTP or SFTP server. The URL syntax is:

```
{tftp:// | sftp://<USER>@} {<IP>|<HOST>} [:<PORT>] [;blocksize=<SIZE>]/<FILE>
```

vrf <VRF-NAME>

Specifies the name of a VRF. Default: default.

Authority

Administrators or local user group members with execution rights for this command.

Example

Copying the capture data to a file on SFTP server 10.0.0.2:

```
switch# copy tshark-pcap sftp://root@10.0.0.2/file.pcap

root@10.0.0.2's password:
Connected to 10.0.0.2.
sftp> put packets.pcap file.pcap
Uploading packets.pcap to /root/file.pcap
packets.pcap                               100% 156    219.8KB/s   00:00
Copied successfully.
```

destination cpu

Syntax

destination cpu

no destination cpu

Description

The command causes the mirror session to transmit mirrored packets to the switch CPU. This destination may be configured for multiple sessions, however only one such configured session may be active at a given time.

The diagnostic utility Tshark may be used to view and capture packets transmitted to the CPU through this route. Ctrl+C must be entered to terminate a Tshark capture session. More details can be found in the *Supportability Guide*.

The `no` form of this command will immediately stops mirroring traffic to the CPU, but will not remove any sources from the mirror configuration.

Command context

config-mirror-<SESSION-ID>

Authority

Administrators or local user group members with execution rights for this command.

Examples

Configuring a mirror session with CPU as the destination.

```
switch# config  
switch(config)# mirror session 1  
switch(config-mirror-1)# destination cpu
```

Removing the destination entirely.

```
switch(config-mirror-1)# no destination cpu
```

destination interface

Syntax

```
destination interface {<INTERFACE-ID>|<LAG-NAME>}
```

```
no destination interface
```

Description

Configures the specified interface as the destination of the mirrored traffic.

The `no` form of this command immediately disables the mirroring session and removes the specified destination interface from the configuration.

Command context

```
config-mirror-<SESSION-ID>
```

Parameters

<INTERFACE-ID>

Specifies a interface. Format: member/slot/port.

<LAG-NAME>

Specifies a LAG (link aggregation group) identifier.

Authority

Administrators or local user group members with execution rights for this command.

Usage

Only one destination is allowed per session.

Supported mirror destinations: Layer 2 or Layer 3 Ethernet ports, LAGs, tunnel, or CPU as a Mirror Destination. A port that is already a member of a LAG is not a valid mirror destination.

Configuring a different destination interface in an enabled mirroring session causes all mirrored traffic to use the new destination interface. This action might cause a temporary suspension of mirrored source traffic during the reconfiguration.

Examples

Configuring a mirroring session and adding an interface as a destination:

```
switch(config)# mirror session 1  
switch(config-mirror-1)# destination interface 1/1/1
```

Replacing the existing destination with different interface:

```
switch(config-mirror-1)# destination interface 1/1/12
```

Removing a destination:

```
switch(config-mirror-1)# no destination interface
```

destination tunnel

Syntax

```
destination tunnel <TUNNEL-IPv4-ADDR> source <SOURCE-IPv4-ADDR>  
    dscp <DSCP-VALUE> vrf <VRF-NAME> id <SPAN-ID>
```

```
no destination tunnel
```

Description

Specifies the tunnel where all mirrored traffic for the session is transmitted. Only one tunnel destination is allowed per session.

You may configure multiple mirror sessions with the same source/destination IP address pair, however, only one of those sessions sharing the same source/destination IP address pair can be enabled at a given time.

Multiple Mirror Sessions can be enabled with the same source/destination IP address pair if the span IDs are different for sessions. By default it is assigned 0 if not specified.

ERSPAN is not supported leaving the switch by the OOB port. If VRF management is configured for an ERSPAN session, the session will be in "mirror_err_tunnel_oob_port_not_supported" operation status.

ERSPAN is not supported leaving the switch encapsulated within another tunnel (e.g. GRE IPv4). When the path to the destination IP address will leave via a tunnel, the session will be in "tunnel_route_resolution_not_populated" operation status.



NOTE: The interface/LAG used to transmit ERSPAN packets should not be a source in the same mirror session.

The `no` form of this command will cease the use of the tunnel and disable the session.

Command context

```
config-mirror-<SESSION-ID>
```

Authority

Administrators or local user group members with execution rights for this command.

Parameters

<TUNNEL-IPv4-ADDR>

Specifies the tunnel address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

<SOURCE-IPv4-ADDR>

Specifies the source address in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255.

<DSCP-VALUE>

Specifies the DSCP value to be carried within the DS field of ERSPAN packet header. Range: 0 to 63.
Default: 0.

<VRF-NAME>

Specifies a VRF name. Default: default.

<SPAN-ID>

Specifies the span ID for the ERSPAN session and during a failover. Range: 0 to 10.

Examples

Creating a Mirror Session and adding tunnel destination, source, dscp, and VRF:

```
switch# config
switch(config)# mirror session 1
switch(config-mirror-1)# destination tunnel 1.1.1.1 source 2.2.2.2 dscp 10 vrf default
```

Replacing the existing tunnel destination:

```
switch(config-mirror-1)# destination tunnel 11.12.13.14 source 2.2.2.2 dscp 10 vrf default
```

Replacing the existing destination with a different DSCP value:

```
switch(config-mirror-1)# destination tunnel 11.12.13.14 source 2.2.2.2 dscp 2 vrf default
```

Replacing the existing destination with a different VRF:

```
switch(config-mirror-1)# destination tunnel 11.12.13.14 source 2.2.2.2 dscp 2 vrf newvrf
```

Removing the destination:

```
switch(config-mirror-1)# no destination tunnel
```

diagnostic

Syntax

diagnostic

```
diag utilities tshark [file]
diag utilities tshark [delete-file]
```

Description

Captures packets from a mirror-to-cpu session, and save the most recent 32MB to pcap file which can then be copied and analyzed. When capturing a mirror-to-cpu session to a file, packets will not be dumped to the console.



NOTE: The `diagnostic` command must be entered prior to the `diag utilities tshark` command.

Use the `delete-file` form of this command to delete the most recent capture file.

Since `file` and `delete-file` are optional, the behavior of the base command `diag utilities tshark` does **not** save anything to a file, and instead dumps the tshark session to the console until **CTRL + c** is entered.

Command context

Manager (#)

Parameters

file

Saves captured packets to a temporary file.

delete-file

Deletes the most recent captured file.

Authority

Administrators or local user group members with execution rights for this command.

Example

Performing diagnostic:

```
switch# diagnostic

switch# diagnostic utilities tshark file
Inspecting traffic mirrored to the CPU until Ctrl-C is entered
^CEnding traffic inspection.
```

disable

Syntax

disable

Description

Disables the mirroring session specified by the current command context.

Command context

config-mirror-<SESSION-ID>

Authority

Administrators or local user group members with execution rights for this command.

Usage

By default, mirroring sessions are disabled.

When a mirroring session is disabled, the `show mirror` command for that session ID shows an Admin Status of `disable` and an Operation Status of `disabled`.

Example

Disabling a mirroring session:

```
switch(config)# mirror session 3
switch(config-mirror-3)# disable
```

enable

Syntax

enable

Description

Enables the mirroring session for the current command context.

Command context

config-mirror-<SESSION-ID>

Authority

Administrators or local user group members with execution rights for this command.

Usage

By default, mirroring sessions are disabled.

When a mirroring session is enabled, the `show mirror` command for that session ID shows an `Admin Status of enable` and an `Operation Status of enabled`.

If sFlow is enabled on an interface and a mirroring session specifies the same interface as the source of received traffic (the source is configured with a direction of `rx` or `both`):

- The attempt to enable the mirroring session fails and an error is returned.
- To enable the mirroring session, first you must disable sFlow on the port.



NOTE: When adding, removing, or changing the configuration of a source interface in an enabled mirroring session, packets from other mirror sources using the same destination interface might be interrupted.

Example

Configuring and enabling a mirroring session:

```
switch(config)# mirror session 3
switch(config-mirror-3)# source interface 1/1/2 rx
switch(config-mirror-3)# destination interface 1/1/3
switch(config-mirror-3)# comment Monitor router port ingress-only traffic
switch(config-mirror-3)# enable
```

mirror session

Syntax

```
mirror session <SESSION-ID>
```

```
no mirror session <SESSION-ID>
```

Description

Creates a mirroring session configuration context or enters an existing mirroring session configuration context.

From this context, you can enter commands to configure and enable or disable the mirroring session.

The `no` form of this command removes an existing mirroring session from the configuration.

Command context

```
config
```

Parameters

<SESSION-ID>

Specifies the session identifier. Range: 1 to 4

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# mirror session 1
switch(config-mirror-1)#

switch(config)# mirror session 3
switch(config-mirror-3)#

switch(config)# no mirror session 1
switch(config)#
```

show mirror

Syntax

```
show mirror [<SESSION-ID>] [vsx-peer]
```

Description

Shows information about mirroring sessions. If *<SESSION-ID>* is not specified, then the command shows a summary of all configured mirroring sessions. If *<SESSION-ID>* is specified, then the command shows detailed information about the specified mirroring session.

Command context

Operator (>) or Manager (#)

Parameters

<SESSION-ID>

Specifies the session identifier. Range: 1 to 4

[vsx-peer]

Shows the output from the VSX peer switch. If the switches do not have the VSX configuration or the ISL is down, the output from the VSX peer switch is not displayed. This parameter is available on switches that support VSX.

Authority

Operators or Administrators or local user group members with execution rights for this command. Operators can execute this command from the operator context (>) only.

Usage

Admin Status indicates the configured status. Admin Status is one of the following values:

enable

The mirroring session is enabled.

disable

The mirroring session has been configured but not yet enabled, or has been disabled.

Operation Status indicates the status of the mirroring session. Operation Status is one of the following values:

dest_doesnt_exist

The configured destination interface is not found in the system. The mirroring session cannot be enabled.

destination_shutdown

The mirroring session is enabled, but the destination interface is shut down. No traffic can be monitored.

disabled

The mirroring session is disabled and is not in an error condition.

enabled

The mirroring session is enabled.

external/driver_error

An internal ASIC hardware error occurred.

hit_active_sessions_capacity

The mirroring session could not be enabled because the maximum number of supported mirroring sessions are already enabled.

internal_error

An invalid parameter was passed to the ASIC software layer.

no_dest_configured

The mirroring session does not have a destination interface configured.

no_name_configured

A software error occurred. The mirroring session does not have a session ID in its configuration.

null_mirror

A software error occurred. The session object reference is invalid.

out_of_memory

The system is out of memory, reboot recommended.

tunnel_route_resolution_not_populated

If the destination tunnel IP address is not reachable.

unknown_error

An unexpected error occurred.

Examples

Showing summary information about all configured mirroring sessions:

```
switch# show mirror
ID  Admin Status  Operation Status
---  -
1   enable       enabled
2   disable      disabled
3   disable      disabled
4   enable       internal_error
```

Showing detailed information about a single mirroring session:

```
switch# show mirror 3
Mirror Session: 3
Admin Status: disable
Operation Status: disabled
Comment: Monitor router port ingress-only traffic
Source: interface 1/1/2 rx
```

```
Destination: interface 1/1/3
Output Packets: 0
Output Bytes: 0
switch#
```

source interface

Syntax

```
source interface {<PORT-NUM> | <LAG-NAME>} [<DIRECTION>]
```

```
no source interface {<PORT-NUM> | <LAG-NAME>} [<DIRECTION>]
```

Description

Configures the specified interface (either an Ethernet port or a LAG) as a source of traffic to be mirrored.

The `no` form of this command ceases mirroring traffic from the specified source interface and removes the source interface from the mirroring session configuration.

Command context

```
config-mirror-<SESSION-ID>
```

Parameters

<PORT-NUM>

Specifies a physical port on the switch. Use the format `member/slot/port` (for example, `1/3/1`).

<LAG-NAME>

Specifies the identifier for the LAG (link aggregation group).

<DIRECTION>

Selects the direction of traffic to be mirrored from this source interface. There is no default for this parameter. Valid values are the following:

both

Mirror both transmitted and received packets.

rx

Mirror only received packets.

tx

Mirror only transmitted packets.

Authority

Administrators or local user group members with execution rights for this command.

Usage

There is a limit of four source interfaces in each direction of a given mirror session. However, there is a practical limit to the amount of traffic that a mirror destination can transmit. For example, mirroring session with multiple 10G sources can overwhelm a single 10G destination.

You can configure the same source interface in multiple mirroring sessions, but only one of those mirroring sessions can be enabled at a time.

Classifier policies with mirror actions can also be used to match and mirror network traffic. Although mirror actions of classifier policies must specify an enabled mirroring session, the traffic matching and mirroring actions are separate from and take priority over basic mirroring sessions. For example, mirroring session 1

might monitor a source interface, but a classifier policy might match some traffic from that same source interface and direct it to the destination interface of a different mirroring session. In this situation, only the traffic that is not matched by the policy is considered for matching by mirroring session 1.

If an interface is in active use by the sFlow feature, then that interface cannot be used as source of received traffic (configured as a source destination with a direction of `rx` or `both`) in an enabled mirroring session. If you want to use this interface as a source of received traffic in a mirroring session, you must disable sFlow on the interface before you enable the mirroring session on the same interface.



NOTE: When adding, removing, or changing the configuration of a source port in an enabled mirroring session, packets from other mirror sources using the same destination port might be interrupted.

Examples

Configuring a mirrored traffic source interface:

```
switch(config-mirror-1)# source interface  
LAG-NAME      Enter a LAG name. For example, lag10  
PORT-NUM      Enter a port number
```

Creating a mirroring session and configuring a source interface to mirror both transmitted and received packets:

```
switch(config)# mirror session 1  
switch(config-mirror-1)# source interface 1/1/1 both
```

Creating a second mirroring session and configuring two source interfaces. One port mirroring only transmitted packets and the other mirroring both transmitted and received packets:

```
switch(config)# mirror session 2  
switch(config-mirror-2)# source interface 1/1/3 tx  
switch(config-mirror-2)# source interface 1/2/1 both
```

Removing the first source interface:

```
switch(config-mirror-2)# no source interface 1/2/3
```

Configuring a source interface to mirror received packets only:

```
switch(config-mirror-3)# source interface 1/1/2 rx
```

Configuring a source interface to mirror both transmitted and received packets:

```
switch(config-mirror-1)# source interface 1/1/1 both
```

Configuring a LAG as source interface to mirror both transmitted and received packets:

```
switch(config-mirror-4)# source interface lag1 both
```

Stopping the mirroring of received packets from a configured source interface:

```
switch(config-mirror-4)# no source interface lag1 rx
```

Configuring SNMP: Refer to the *ArubaOS-CX SNMP/MIB Guide* for information on how to add SNMP so a device can be monitored from a network management system (NMS).

Configuring an SNMP trap receiver: Refer to the *ArubaOS-CX SNMP/MIB Guide* and specific information about the `show snmp trap` command to enable SNMP traps.

Ports default to an unsplit state. When a port is 'split', the split interfaces become active and can be configured independently. For example, when a 40G QSFP+ port is split four ways, each split interface behaves like a separate 10G SFP+ port. The split interfaces have the same name as the base port with an added suffix to represent their lane of the breakout cable. Splitting an interface removes most of the port's configuration settings and makes it inactive. The port will no longer appear in many show interface commands and most configuration commands are not allowed.

The same thing happens in reverse when an interface is unsplit. However, note that the 'split' and 'no split' commands are always performed in the unsplit port's context. After splitting a port, a reboot is required to complete the process. On a chassis system, just the line modules of all newly split ports can be rebooted. Otherwise, the entire system must be rebooted. Until the reboot, split interfaces can continue to be configured, but will remain in a 'down' state.

Limitations with split hydra cable support

- The 8400 switch does not support DAC breakout cables, only optical breakout cables.
- The JL365A module does not support Priority-Based Flow Control (PFC) on split ports.
- The JL366A module does not support 100G breakout cables.
- The JL720A module does not support split ports.

Split hydra cable support commands

split

Syntax

```
split [confirm]
```

```
no split [confirm]
```

Description

Splits a port into multiple interfaces. Only ports capable of supporting breakout cables, also known as splitter or Hydra cables, can be split.

Command context

```
config-if
```

Parameters

confirm

Specifies the confirmation of port splitting.

Authority

Administrators or local user group members with execution rights for this command.

Usage

The splittable ports for all models are shown in the table below:

Model	Switch	Ports
JL479A	Aruba 8320 48 10/6 40 X472 5 2 Bdl	49-54 (40G)
JL579A	Aruba 8320 32 40G X472 5 2 Bdl	5-28 (40G - center 24 ports)
JL581A	Aruba 8320 48 T/6 40 X472 5 2 Bdl	49-54 (40G)
JL635A	Aruba 8325 48Y8C models (displayed by the CLI <code>show system</code>)	49-56 (40G or 100G)
JL624A	Aruba 8325-48Y8C FB 6 F 2 PS Bdl	49-56 (40G or 100G)
JL625A	Aruba 8325-48Y8C BF 6 F 2 PS Bdl	49-56 (40G or 100G)
JL626A	Aruba 8325-32C FB 6 F 2 PS Bdl	1-32 (40G or 100G)
JL627A	Aruba 8325-32C BF 6 F 2 PS Bdl	1-32 (40G or 100G)
JL636A	Aruba 8325 32C models (displayed by the CLI <code>show system</code>)	1-32 (40G or 100G)
JL717A	Aruba 8360-32Y4C (displayed by the CLI <code>show system</code>)	33-36
JL700A	Aruba 8360-32Y4C Prt2Pwr3F2PS Bdl	33-36
JL701A	Aruba 8360-32Y4C Pwr2Prt3F2PS Bdl	33-36
JL721A	Aruba 8360-12C (displayed by the CLI <code>show system</code>)	1-12
JL718A	Aruba 8360 16Y2C (displayed by the CLI <code>show system</code>)	17-18
JL702A	Aruba 8360-16Y2C Pwr2Prt3F2PS Bdl	17-18
JL703A	Aruba 8360-16Y2C Prt2Pwr3F2PS Bdl	17-18
JL721A	Aruba 8360-12C (displayed by the CLI <code>show system</code>)	1-12
JL708A	Aruba 8360-12C Pwr2Prt3F2PS Bdl	1-12
JL709A	Aruba 8360-12C Pwr2Prt3F2PS Bdl	1-12
JL722A	Aruba 8360 24XF2C (displayed by the CLI <code>show system</code>)	25-26
JL710A	Aruba 8360-24XF2C Prt2Pwr3F2PS Bdl	25-26
JL711A	Aruba 8360-24XF2C Prt2Pwr3F2PS Bdl	25-26
JL365A	Aruba 8400X 8p 40G QSFP+ Adv Mod	1-8 (40G)
JL366A	Aruba 8400X 6p 40G/100G QSFP28 Adv Mod	1-6 (100G split mode only) 40G split not supported

Examples

Splitting an interface:

```
switch(config-if)# interface 1/1/52  
switch(config-if)# split
```

This command will disable the specified port, clear its configuration, and split it into multiple interfaces. The split interfaces will not be available until the next system or line module reboot.

Continue (y/n)? y

```
switch(config-if)# show interface brief
```

Port	Native VLAN	Mode	Type	Enabled	Status	Reason	Speed (Mb/s)	Description
------	-------------	------	------	---------	--------	--------	--------------	-------------

1/1/52:1	--	routed	QSFP+DA3x4	yes	down	Split	reboot	pending	--	--
1/1/52:2	--	routed	QSFP+DA3x4	yes	down	Split	reboot	pending	--	--
1/1/52:3	--	routed	QSFP+DA3x4	yes	down	Split	reboot	pending	--	--
1/1/52:4	--	routed	QSFP+DA3x4	yes	down	Split	reboot	pending	--	--

You can manage and monitor the AOS-CX switch through Aruba AirWave. The following benefits and functions include:

- Configuration (partial configuration)
- Device topology
- Immediate and historical trend reports
- Monitoring of the device and user connected to the network.
- Network discovery
- Syslogs and trap receiver

For information about which versions of Aruba AirWave support AOS-CX, see the *ArubaOS-CX Release Notes*.

SNMP support and AirWave

For AirWave to discover and monitor the switch, you must:

- Enable the SNMP services on the switch.
- Configure the SNMP agent to use the SNMP version supported by the management station.

SNMP on the switch

The switch provides SNMP services through the management channel and the data interfaces. Functionality, such as device discovery from NMS, syslog and trap forwarding, can be any channel configured by you.

Although the SNMP server can be enabled on both VRFs (`mgmt` and `default`), only one instance of SNMP can be running. The highest priority is on the `default` VRF.

For example, assume that SNMP is first enabled on the `mgmt` VRF (`snmp-server vrf mgmt`). Then, SNMP is enabled on the `default` VRF (`snmp-server vrf default`) without disabling SNMP on the `mgmt` (using an equivalent `no` form of the command). The `show running-config` command displays both `snmp-server vrf` commands; however, the SNMP instance is running only on the `default` VRF (highest priority).

```
switch# config
switch(config)# snmp-server vrf mgmt
switch(config)# snmp-server vrf default
switch(config)# show running-config
Current configuration:
!
!Version ArubaOS-CX Virtual.10.01.
led locator on
!
!
!
snmp-server vrf default
snmp-server vrf mgmt
!
...
```

Supported features with AirWave and the AOS-CX switch

AirWave supports the following features with the AOS-CX switch:

Device management	Device discovery using SNMPv2C and SNMPv3
	Device dashboards
Monitoring management	Device health attributes (device status/reachability)
	Interface and VLAN management
	Initiates an SSH connection from Aruba AirWave to AOS-CX so that the device outputs from the AOS-CX CLI can be displayed in the Aruba AirWave user interface.
	Firmware versions
	Displays neighbor devices connected to AOS-CX switches
Configuration management	Device topology
	Partial configuration
Alarm management	Alarm triggers (device and interface up/down, new device discoveries, custom event triggers)
	Syslogs and traps
Report management	Device inventory, interface utilization, and device reachability reports
	Summary report of device model, firmware, and boot loader version

Configuring the AOS-CX switch to be monitored by AirWave

Prerequisites

Aruba AirWave is active on the network.

Procedure

1. Enable SNMP on the ArubaOS-CX switch by entering the **snmp-server vrf** command.

```
switch(config)# snmp-server vrf mgmt
switch(config)# snmp-server vrf default
```

2. Configure the SNMPv2C community to public by entering the **snmp-server community public** command. In this instance, `public` is a read-only community string.

```
switch(config)# snmp-server community public
```

3. The community-string is used by SNMPv1 and SNMPv2C for unencrypted authentication. SNMPv3 lets you encrypt the authentication mechanism. To enable SNMPv3, enter the **snmpv3 user** and **snmpv3 context** commands.

```
switch(config)# snmpv3 user Admin auth sha auth-pass ciphertext
AQBap2Hf2d20GYr/xcGUzYzm0zjNf/4VKHtSqbnImqtFYbJYCgAAALkGFJVcSp3nZ3o=
priv des priv-pass ciphertext AQBapb0H2poBQKXPoVsC9L9qzZyFJQnzR7hmTr7LGsOsI7K3CgAAAKP98Rq2jfTrFwQ=
switch(config)# snmpv3 context Admin
```

For discovering devices in AirWave through the SNMPv3 community, the SNMPv3 context name is not mandatory. Devices can still be discovered in Aruba AirWave without the SNMPv3 context name.

4. Enter the **logging** command for enabling syslog forwarding to a remote syslog server, such as AirWave:

```
switch(config)# logging 10.0.10.2 severity debug
```

5. SNMP traps enable an agent to notify the management station of significant events by way of an unsolicited SNMP message. Enable SNMP traps by entering the **snmp-server host** command:

```
switch(config)# snmp-server host 10.10.10.10 trap version v2c vrf default
```

SNMP traps cannot be forwarded from AOS-CX 10.00 switches that have the VRF configured as `mgmt`. Later versions of AOS-CX support SNMP trap forwarding even when the VRF is configured as `default` or `mgmt`.

6. For information on how to add a device for monitoring in the Aruba AirWave user interface, see the documentation for Aruba AirWave.

logging

Syntax

```
logging {<IPV4-ADDR> | <IPV6-ADDR> | <HOSTNAME>}
    [udp [<PORT-NUM>] | tcp [<PORT-NUM>]] [include-auditable-events]
    [severity <LEVEL>] [vrf <VRF-NAME>]

no logging {<IPV4-ADDR> | <IPV6-ADDR> | <HOSTNAME>}
    [udp [<PORT-NUM>] | tcp [<PORT-NUM>]] [severity <LEVEL>]
    [vrf <VRF-NAME>]

no logging
```

Description

Enables syslog forwarding to a remote syslog server.

The `no` form of this command disables syslog forwarding to a remote syslog server.

Command context

config

Parameters

{<IPV4-ADDR> | <IPV6-ADDR> | <HOSTNAME>}

Selects the IPv4 address, IPv6 address, or host name of the remote syslog server. Required.

[udp [<PORT-NUM>] | tcp [<PORT-NUM>]]

Specifies the UDP port or TCP port of the remote syslog server to receive the forwarded syslog messages.

udp [**<PORT-NUM>**]

Range: 1 to 65535. Default: 514

tcp [**<PORT-NUM>**]

Range: 1 to 65535. Default: 1470

include-auditable-events

Specifies that auditable messages are also logged to the remote syslog server.

severity **<LEVEL>**

Specifies the severity of the syslog messages:

- **alert**: Forwards syslog messages with the severity of **alert** (6) and **emergency** (7).
- **crit**: Forwards syslog messages with the severity of **critical** (5) and above.
- **debug**: Forwards syslog messages with the severity of **debug** (0) and above.
- **emerg**: Forwards syslog messages with the severity of **emergency** (7) only.
- **err**: Forwards syslog messages with the severity of **err** (4) and above
- **info**: Forwards syslog messages with the severity of **info** (1) and above. Default.
- **notice**: Forwards syslog messages with the severity of **notice** (2) and above.
- **warning**: Forwards syslog messages with the severity of **warning** (3) and above.

vrf **<VRF-NAME>**

Specifies the VRF used to connect to the syslog server. Optional. Default: **default**

Authority

Administrators or local user group members with execution rights for this command.

Examples

Enabling the syslog forwarding to remote syslog server 10.0.10.2:

```
switch(config)# logging 10.0.10.2
```

Enabling the syslog forwarding of messages with a severity of **err** (4) and above to TCP port 4242 on remote syslog server 10.0.10.9 with VRF **lab_vrf**:

```
switch(config)# logging 10.0.10.9 tcp 4242 severity err vrf lab_vrf
```

Disabling syslog forwarding to a remote syslog server:

```
switch(config)# no logging
```

snmp-server community

Syntax

```
snmp-server community <STRING>
```

```
no snmp-server community <STRING>
```

Description

Adds an SNMPv1/SNMPv2c community string. A community string is a password that controls read access to the SNMP agent. A network management program must supply this name when attempting to get SNMP information from the switch. A maximum of 10 community strings are supported. Once you create your own community string, the default community string (`public`) is deleted.

The `no` form of this command removes the specified SNMPv1/SNMPv2c community string. When no community string exists, a default community string with the value `public` is automatically defined.

Command context

```
config
```

Parameters

<STRING>

Specifies the SNMPv1/SNMPv2c community string. Range: 1 to 32 printable ASCII characters, excluding space and question mark.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Setting the SNMPv1/SNMPv2c community string to **private**:

```
switch(config)# snmp-server community private
```

Removing SNMPv1/SNMPv2c community string **private**:

```
switch(config)# no snmp-server community private
```

snmp-server host

Syntax

```
snmp-server host <IPv4-ADDR> trap version <VERSION> [community <STRING>]  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

```
no snmp-server host <IPv4-ADDR> trap version <VERSION> [community <STRING>]  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

```
snmp-server host <IPv4-ADDR> inform version v2c [community <STRING>]  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

```
no snmp-server host <IPv4-ADDR> inform version v2c [community <STRING>]  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

```
snmp-server host <IPv4-ADDR> [trap version v3 | inform version v3] user <NAME>  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

```
no snmp-server host <IPv4-ADDR> [trap version v3 | inform version v3] user <NAME>  
[port <UDP-PORT>] [vrf <VRF-NAME>]
```

Description

Configures a trap/informs receiver to which the SNMP agent can send SNMP v1/v2c/v3 traps or v2c informs. A maximum of 30 SNMP traps/informs receivers can be configured.

The **no** form of this command removes the specified trap/inform receiver.



NOTE: Configuring `snmpv3 informs` is not supported.

Command context

config

Parameters

<IPv4-ADDR>

Specifies the IP address of a trap receiver in IPv4 format (x.x.x.x), where x is a decimal number from 0 to 255. You can remove leading zeros. For example, the address 192.169.005.100 becomes 192.168.5.100.

trap version <VERSION>

Specifies the trap notification type for SNMPv1 or v2c. Available options are: v1 or v2c.

inform version v2c

Specifies the inform notification type for SNMPv2c.

trap version v3

Specifies the trap notification type for SNMPv3.

user <NAME>

Specifies the SNMPv3 user name to be used in the SNMP trap notifications.

community <STRING>

Specifies the name of the community string to use when sending trap notifications. Range: 1 - 32 printable ASCII characters, excluding space and question mark. Default: public.

<UDP-PORT>

Specifies the UDP port on which notifications are sent. Range: 1 - 65535. Default: 162.

vrf <VRF-NAME>

Specifies the name of the VRF on which to send the notifications.

Authority

Administrators or local user group members with execution rights for this command.

Examples

```
switch(config)# snmp-server host 10.10.10.10 trap version v1
switch(config)# no snmp-server host 10.10.10.10 trap version v1

switch(config)# snmp-server host 10.10.10.10 trap version v2c community public
switch(config)# no snmp-server host 10.10.10.10 trap version v2c community public

switch(config)# snmp-server host 10.10.10.10 trap version v2c community public port 5000
switch(config)# no snmp-server host 10.10.10.10 trap version v2c community public port 5000

switch(config)# snmp-server host 10.10.10.10 trap version v2c community public port 5000 vrf default
switch(config)# no snmp-server host 10.10.10.10 trap version v2c community public port 5000 vrf default

switch(config)# snmp-server host 10.10.10.10 inform version v2c community public
switch(config)# no snmp-server host 10.10.10.10 inform version v2c community public

switch(config)# snmp-server host 10.10.10.10 inform version v2c community public port 5000
switch(config)# no snmp-server host 10.10.10.10 inform version v2c community public port 5000

switch(config)# snmp-server host 10.10.10.10 inform version v2c community public port 5000 vrf default
```

```
switch(config)# no snmp-server host 10.10.10.10 inform version v2c community public port 5000 vrf default
switch(config)# snmp-server host 10.10.10.10 trap version v3 user Admin
switch(config)# no snmp-server host 10.10.10.10 trap version v3 user Admin

switch(config)# snmp-server host 10.10.10.10 trap version v3 user Admin port 2000
switch(config)# no snmp-server host 10.10.10.10 trap version v3 user Admin port 2000
```

snmp-server vrf

Syntax

```
snmp-server vrf <VRF-NAME>
```

```
no snmp-server vrf <VRF-NAME>
```

Description

Configures the VRF on which the SNMP agent listens for incoming requests. By default, the SNMP agent does not listen on any VRF.

The `no` form of this command stops the SNMP agent from listening for incoming requests on the specified VRF.

Command context

```
config
```

Parameters

<VRF-NAME>

Specifies the VRF on which the SNMP agent listens for incoming requests. The SNMP agent can listen on either the `mgmt` or `default` VRF. If configured for both, the SNMP agent listens on `default`, which has a higher priority.

Authority

Administrators or local user group members with execution rights for this command.

Example

```
switch(config)# snmp-server vrf default
```

```
switch(config)# no snmp-server vrf default
```

snmpv3 context

Syntax

```
snmpv3 context <NAME> vrf <VRF-NAME> [community <STRING>]
```

```
no snmpv3 context <NAME> [vrf <VRF-NAME>]
```

Description

Creates an SNMPv3 context on the specified VRF.

The `no` form of this command removes the specified SNMP context.

Command context

```
config
```

Parameters

<NAME>

Specifies the name of the context. Range: 1 to 32 printable ASCII characters, excluding space and question mark (?).

vrf <VRF-NAME>

Specifies the VRF associated with the context. Default: default.

community <STRING>

Specifies the SNMP community string associated with the context. Range: 1 to 32 printable ASCII characters, excluding space and question mark. Default: public.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Creating an SNMPv3 context named **newContext**:

```
switch(config)# snmpv3 context newContext
```

Creating an SNMPv3 context named **newContext** on VRF **myVrf** and with community string **private**.

```
switch(config)# snmpv3 context newContext vrf myVrf community private
```

Removing the SNMPv3 context named **newContext** on VRF **myVrf**:

```
switch(config)# no snmpv3 context newContext vrf myVrf
```

snmpv3 user

Syntax

```
snmpv3 user <NAME> [auth <AUTH-PROTOCOL> auth-pass {plaintext | ciphertext}  
<AUTH-PWORD> [priv <PRIV-PROTOCOL> priv-pass {plaintext | ciphertext} <PRIV-PWORD>] ]
```

```
no snmpv3 user <NAME> [auth <AUTH-PROTOCOL> auth-pass  
<AUTH-PWORD> [priv <PRIV-PROTOCOL> priv-pass <PRIV-PWORD>] ]
```

Description

Creates an SNMPv3 user and adds it to an SNMPv3 context.

The **no** form of this command removes the specified SNMPv3 user.

Command context

config

Parameters

<NAME>

Specifies the SNMPv3 username. Range 1 - 32 printable ASCII characters, excluding space and question mark.

auth <AUTH-PROTOCOL>

Specifies the authentication protocol used to validate user logins. Available options are: md5 or sha.

auth-pass {plaintext | ciphertext} <AUTH-PWORD>

Specifies the SNMPv3 user password. Range for `plaintext` is 8 - 32 printable ASCII characters, excluding space and question mark.

Range for `ciphertext` is 1 - 120 printable ASCII characters. This option is only used when copying user configuration settings between switches. It enables you to duplicate a user's configuration on another switch without having to know their password.

priv <PRIV-PROTOCOL>

Specifies the SNMPv3 security protocol (encryption method). Available options are: `aes` or `des`.

priv-pass {plaintext | ciphertext} <PRIV-PWORD>

Specifies the SNMPv3 user privacy passphrase. Range for `plaintext` is 8 - 32 printable ASCII characters, excluding space and question mark.

Range for `ciphertext` is 1 - 120 printable ASCII characters. This option is only used when copying user configuration settings between switches. It enables you to duplicate a user's configuration on another switch without having to know their password.

Authority

Administrators or local user group members with execution rights for this command.

Examples

Defining an SNMPv3 user named **Admin** using **sha** authentication with the plaintext password **mypassword** and using **des** security with the plaintext password **myprivpass**:

```
switch(config)# snmpv3 user Admin auth sha auth-pass plaintext mypassword priv des priv-pass plaintext myprivpass
```

Removing an SNMPv3 user named **Admin**:

```
switch(config)# no snmpv3 user Admin
```

Defining an SNMPv3 user named **Admin** using **sha** authentication with the plaintext password **mypassword** and using **des** security with the plaintext password **myprivpass**:

```
switch(config)# snmpv3 user Admin auth sha auth-pass plaintext mypassword priv des priv-pass plaintext myprivpass
```

Copying an SNMP user from switch 1 to switch 2.

On switch 1, configure a user called **Admin**, then issue the `show running-config` command to display switch configuration settings. The `snmpv3 user` command uses the `ciphertext` option to protect the users's passwords.

```
switch1(config)# snmpv3 user Admin auth sha auth-pass plaintext mypassword
priv des priv-pass plaintext myprivpass
switch1(config)# exit
switch1# show running-config
Current configuration:
!
!Version ArubaOS-CX TL.10.00.0003-8017-gdeb0606~dirty
!
!
!
snmpv3 user Admin auth sha auth-pass ciphertext
AQBapZHf2d20GYr/xcGUzYzm0zjNf/4VKHtSqbNImqtFYbJYCgAAALkGFJVcSp3nZ3o=
priv des priv-pass ciphertext AQBapb0H2poBQKXPoVsC9L9qzZyfJQnzR7hmTr7LGsOsI7K3CgAAAKP98Rq2jfTrFwQ=
ssh server vrf mgmt
!
!
!
interface mgmt
no shutdown
```

```
ip dhcp  
vlan 1
```

On switch 2, execute the snmpv3 user command that was displayed by `show running-config` on switch 1. This creates the user on switch 2 with the same configuration settings.

```
switch1(config)# snmpv3 user Admin auth sha auth-pass ciphertext  
AQBapZHf2d20GYr/xcGUzYzm0zjNf/4VKHtSqbNImqtfYbJYCgAAALkGFJVcSp3nZ3o=  
priv des priv-pass ciphertext AQBapb0H2poBQKXPoVsC9L9qzZyfJQnzR7hmTr7LGsOsI7K3CgAAAKP98Rq2jfTrFwQ=
```

Accessing Aruba Support

Aruba Support Services	https://www.arubanetworks.com/support-services/
Aruba Support Portal	https://asp.arubanetworks.com/
North America telephone	1-800-943-4526 (US & Canada Toll-Free Number) +1-408-754-1200 (Primary - Toll Number) +1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working)
International telephone	https://www.arubanetworks.com/support-services/contact-support/

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

Other useful sites

Other websites that can be used to find information:

Airheads social forums and Knowledge Base	https://community.arubanetworks.com/
Software licensing	https://lms.arubanetworks.com/
End-of-Life information	https://www.arubanetworks.com/support-services/end-of-life/
Aruba software and documentation	https://asp.arubanetworks.com/downloads

Accessing updates

To download product updates:

Aruba Support Portal

<https://asp.arubanetworks.com/downloads>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found:

My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>



IMPORTANT: Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

Warranty information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

Regulatory information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

Documentation feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback (docsfeedback-switching@hpe.com). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help content, include the product name, product version, help edition, and publication date located on the legal notices page.