



1. Description

1.1. Project

Project Name	Clock
Board Name	NUCLEO-L476RG
Generated with:	STM32CubeMX 6.9.1
Date	09/05/2023


1.2. MCU

MCU Series	STM32L4
MCU Line	STM32L4x6
MCU name	STM32L476RGTx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

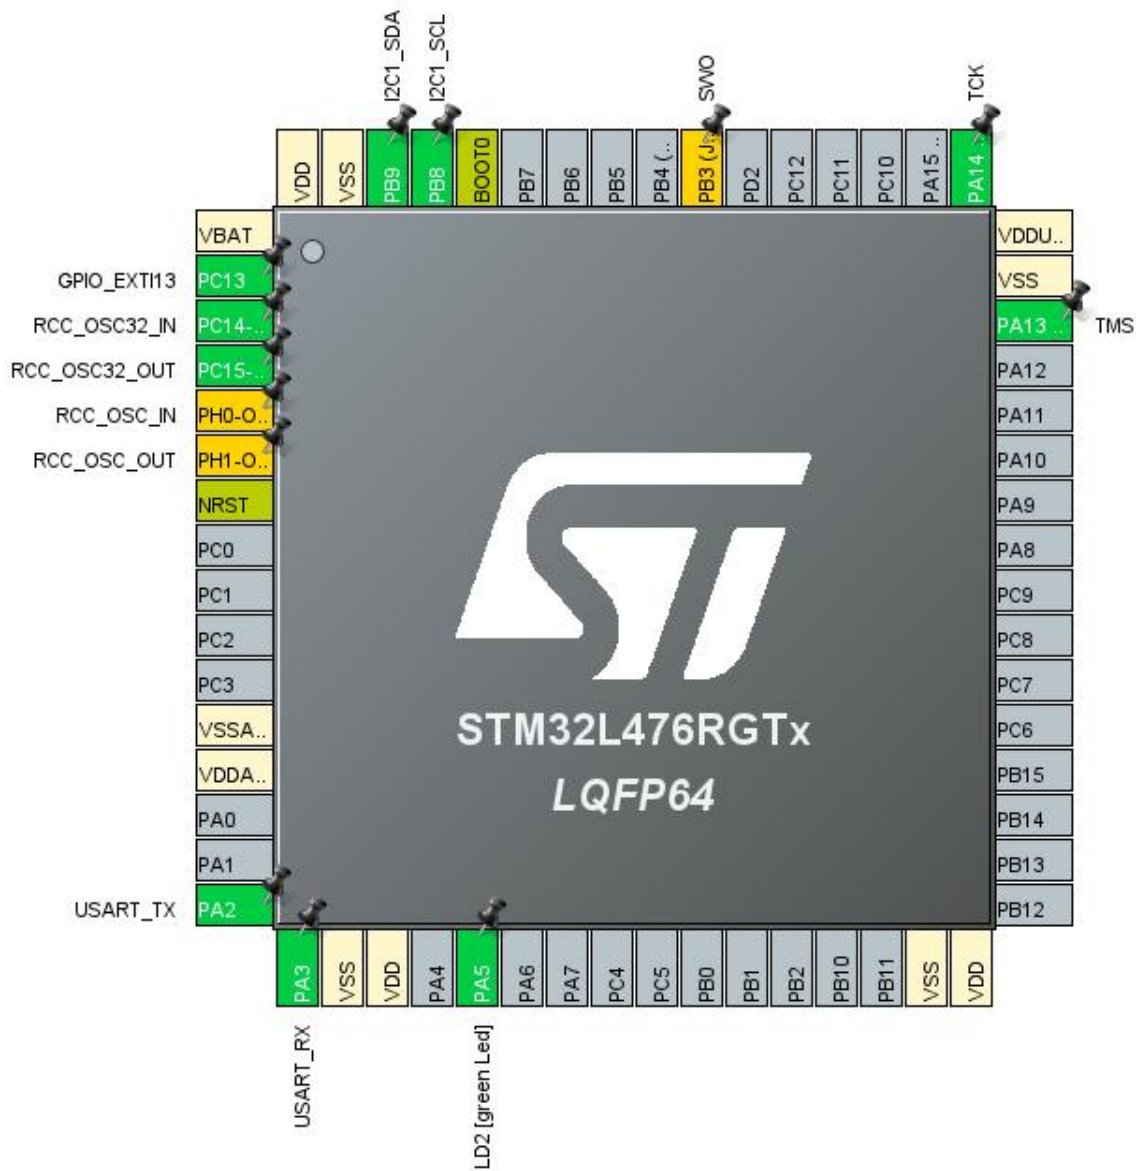


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	
3	PC14-OSC32_IN (PC14)	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT (PC15)	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN (PH0) *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT (PH1) *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VDDA/VREF+	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [green Led]
31	VSS	Power		
32	VDD	Power		
46	PA13 (JTMS-SWDIO)	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDDUSB	Power		
49	PA14 (JTCK-SWCLK)	I/O	SYS_JTCK-SWCLK	TCK
55	PB3 (JTDO-TRACESWO) *	I/O	SYS_JTDO-SWO	SWO
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

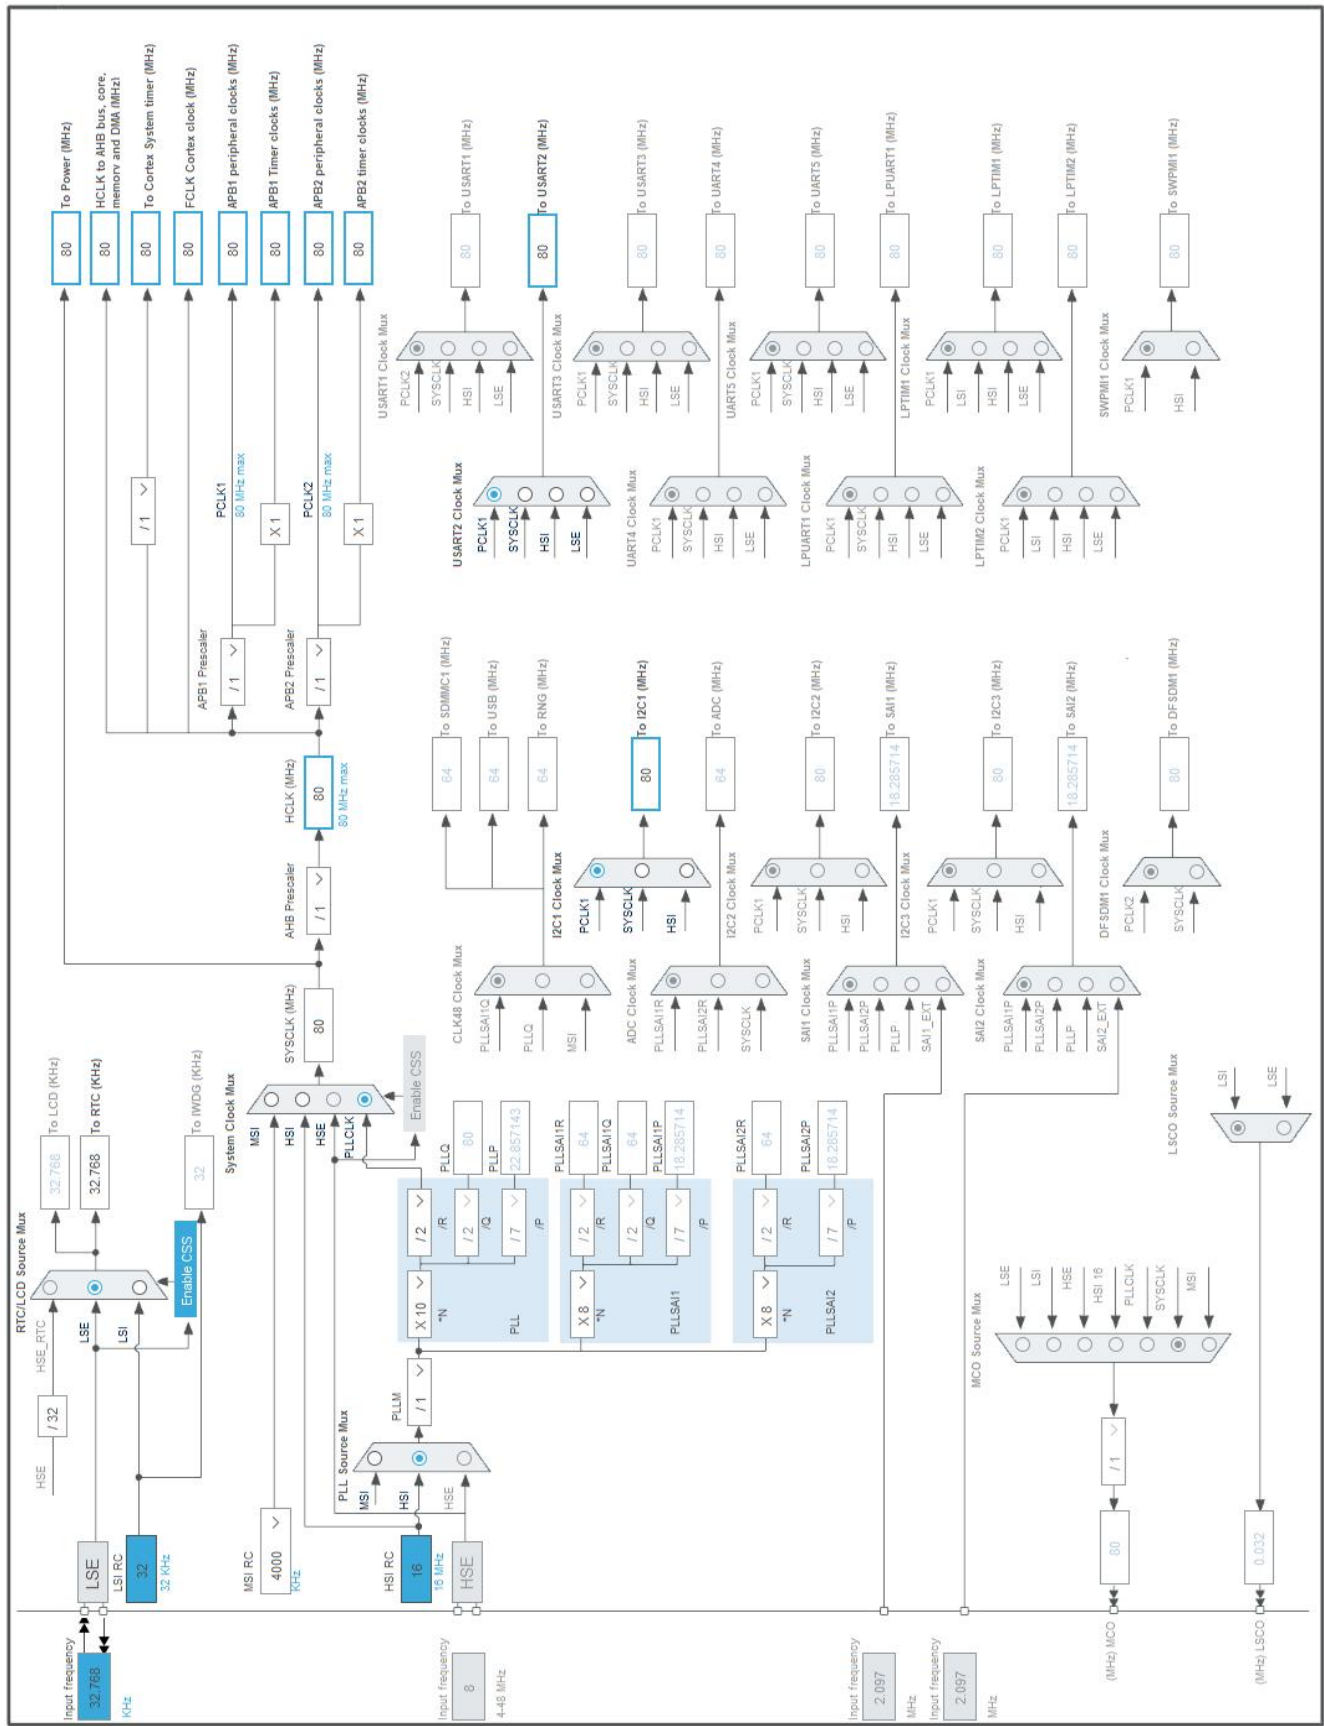

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Clock
Project Folder	C:\Users\shiny\Documents\data-science-study\STM32\Clock
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L4 V1.18.0
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_USART2_UART_Init	USART2
4	MX_RTC_Init	RTC
5	MX_I2C1_Init	I2C1

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32L4
Line	STM32L4x6
MCU	STM32L476RGTx
Datasheet	DS10198_Rev4

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP2
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-High	NoRange
Fetch Type	SRAM2	n/a
CPU Frequency	80 MHz	0 Hz
Clock Configuration	HSE PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	10.7 mA	1.18 μ A
Duration	0.1 ms	0.9 ms
DMIPS	100.0	0.0
Ta Max	103.56	105
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	1.07 mA
Battery Life	4 months, 10 days, 3 hours	Average DMIPS	100.0 DMIPS

1.6. Chart

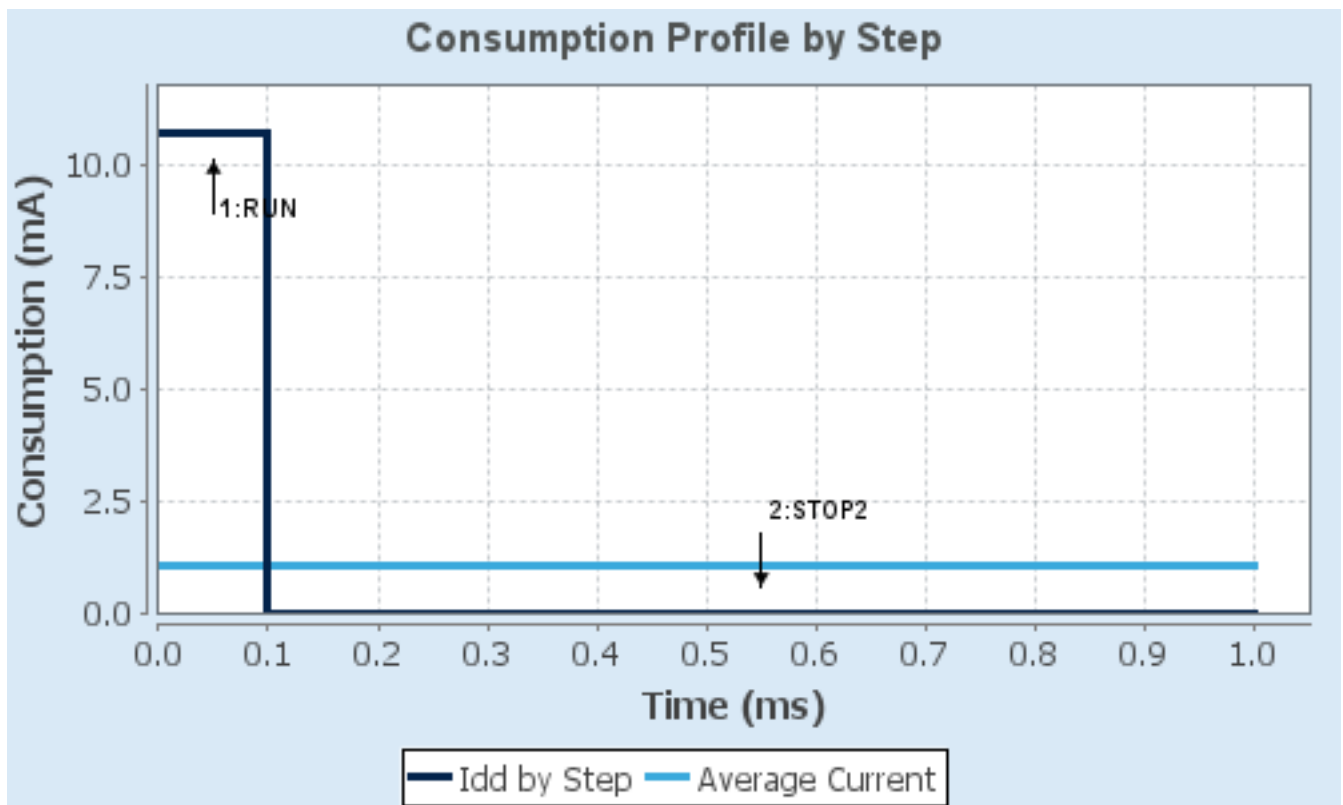

2. Peripherals and Middlewares Configuration

2.1. I2C1

I2C: I2C

2.1.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x10909CEC *

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

2.2. RCC

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

2.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	4 WS (5 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
MSI Auto Calibration	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000
LSE Drive Capability	LSE oscillator low drive capability

Power Parameters:

Power Regulator Voltage Scale

Power Regulator Voltage Scale 1

2.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

Alarm A: Internal Alarm A

2.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	BCD data format
Hours	0
Minutes	0
Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Sunday *
Month	January
Date	1
Year	23 *

Alarm A:

Hours	0
Minutes	0
Seconds	1 *
Sub Seconds	0
Alarm Mask Date Week day	Enable *
Alarm Mask Hours	Enable *
Alarm Mask Minutes	Enable *
Alarm Mask Seconds	Disable
Alarm Sub Second Mask	All Alarm SS fields are masked.
Alarm Date Week Day Sel	Date
Alarm Date	1

2.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

2.5. USART2

Mode: Asynchronous

2.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

3. System Configuration

3.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Very High *	
RCC	PC14-OSC32_IN (PC14)	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT (PC15)	RCC_OSC32_OUT	n/a	n/a	n/a	
SYS	PA13 (JTMS-SWDIO)	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14 (JTCK-SWCLK)	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PH0-OSC_IN (PH0)	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT (PH1)	RCC_OSC_OUT	n/a	n/a	n/a	
	PB3 (JTDO-TRACESWO)	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [green Led]

3.2. DMA configuration

nothing configured in DMA service

3.3. NVIC configuration

3.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART2 global interrupt	true	0	0
EXTI line[15:10] interrupts	true	0	0
RTC alarm interrupt through EXTI line 18	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
FPU global interrupt	unused		

3.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
USART2 global interrupt	false	true	true
EXTI line[15:10] interrupts	false	true	true
RTC alarm interrupt through EXTI line 18	false	true	true

*** User modified value**

4. System Views

4.1. Category view

4.1.1. Current

Middleware						
System Core	Analog	Timers	Connectivity	Multimedia	Security	Computing
DMA		RTC ✓	I2C1 ✓			
GPIO ⚠			USART2 ✓			
NVIC ✓						
RCC ✓						
SYS ✓						

5. Docs & Resources

Type	Link
------	------