
					_					
ITEM NO	DESCRIPTION		WORLD		DRAWN BY	TOLERANCES		REVISION HISTORY		
22213	PSF-102 SERIES SWITCH		Worl		DLL	.XXXX	± 0.0005	REV	ECN	DATE
22213				DATE	.XXX	± 0.005	Α	5717	06/08/2020	
SHEET 1 OF 1	MATERIAL	AMOUNT	1 MAGI	NETICS	6/8/2020	.XX	± 0.01			
REF	POLYCARBONATE CASE	EACH		, TRAVERSE CITY, MI 49686	SCALE	FRACT	± 1/64			
7651-711	URETHANE DIAPHRAGM	LACIT	· ·	, 00 FAX: 231 - 946-0274	1.5 x 1	ANGLE	± 1°			

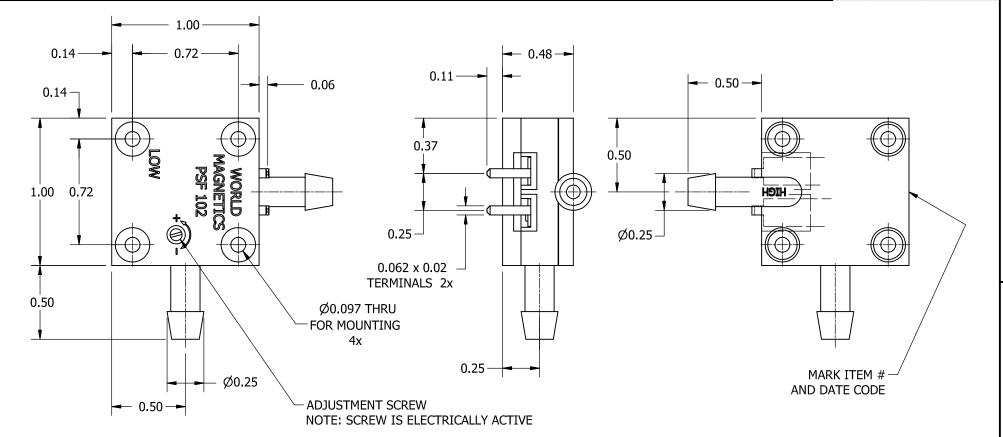

SPECIFICATIONS

1	ACTUATION PRESSURE	0.8 " H2O \pm 0.2" H2O ON INCREASING PRESSURE
2	SWITCH TYPE	SINGLE POLE, SINGLE THROW, NORMALLY OPEN
3	CONTACT VOLTAGE	30 VOLTS MAX AC/DC, 120 VAC NEON LAMP LOAD
4	CURRENT	40 mA MAX RESISTIVE DC
5	CONTACT RESISTANCE	ONE OHM OR LESS AT 150% OF ACTUATION PRESSURE
6	PROOF PRESSURE	8 PSI
7	MECHANICAL LIFE	20 MILLION CYCLES
8	TEMPERATURE	+40° F TO +150° F, SOME SET POINT DEVIATION MAY
L °		OCCUR THROUGHOUT THE TEMPERATURE RANGE