

Precision weeding in lettuce and spinach fields

Literature Review

Abstract

In this research project, we are trying to develop a method for Precision weeding in crop fields. Our initial step is to find the best approach to create a heatmap of the crops and weeds on the whole field. Once we have such a map, we can feed it to a machine that is capable of spraying areas marked as weed in the field. There have been various approaches in detecting weeds in a crop field. We will try to summarize many of those useful approaches here.

1 Unsupervised Classification Algorithm for Early Weed Detection in Row-Crops by Combining Spatial and Spectral Information [2]

This paper introduces an automatic approach in weed detection in order to reduce herbicide use in agriculture. They combine spatial and spectral information/features from four band multi spectral images. Images acquired using a camera mounted on a pole 3m above the ground. The automatic part of this method is as follows. They consider row crop arrangement as a ground truth in grouping the plants. In other words, everything not on the crop rows will be considered weed and things on the crop row might be either weed or plant. Then using these informations, a training dataset containing the multi-spectral image features is created and use to train a support vector machine (SVM). At the end for testing, inter-row crops are classified as weed (only based on spatial feature) and in-row crops are classified as either weed or crop using the SVM and the spectral features. They report 89 as their weed detection rate using the method mentioned earlier (combination of both spatial and spectral features), 79 for using only spatial features and 75 for using only spectral features.

1.1 More on this method

One way to distinguish different approaches for detection and localization of weeds is the distance and the vehicle from which the images are captured which includes satellite, aerial, terrestrial vehicle, etc. Another one is the sensor used to capture images. Images can only have the three color bands (RGB) or might have other bands as well such as Near Infrared. One interesting approach is to use UAVs to capture multi-spectral images from large areas in a field. Based on the previous studies, weeds and crops can be discriminated using their reflectance spectra. However, there are some limitations: number of spectral bands is limited, field condition affects the spectral reflectance information, spectral reflectance changes with psychological stress.

At the time that this paper was written, the usual camera for weed detection on a UAV had 4 bands (near infrared + RGB). NIR helps separation of the vegetation and the background.

1.2 Vegetation Indices

In most of the weed detection method, the first step is to distinguish the vegetation (whether it is weed or crop) from the background. It is usually done by calculating a Vegetation Index and applying a thresholding algorithm on that index value at each pixel. One of the most common indices is Normalized Difference Vegetation Index (NDVI) for the case where NIR data is available and Excess Green Index (ExG) when only RGB is available.

1.3 Geometrical Information for weed detection

One approach for weed detection is to use geometrical information for detecting weeds. One is automatic row detection using textural based methods. People have used Gabor filters and Object-Based Image Analysis (OBIA) to detect the crop rows by segmentation. OBIA is something like a histogram of texture.

1.4 Some Spatial and Spectral combination methods

There has been some methods that combined spatial and spectral features together using Bayesian methods and pixel neighborhood similarity. Another interesting method was using spatial information to detect inter-row weeds and then using some sort of nearest neighbor classifier with the vegetation index to classify in-row crops. Another method combined SVM and OBIA and reached 96 percent accuracy in sunflower fields. They also added a feature selection method which helped the accuracy. In some other methods, hough transform and random forest are used which reached 96 percent accuracy. Another paper reconstructed the plants in 3D and used their average height to decide whether they are weed or crop.

In general, supervised classification is much better than unsupervised but it needs labeled training data. On the other hand, unsupervised methods can be used to generate labeled data.

1.5 The proposed method in this paper

In the proposed method, they used a multi-spectral imaging system on a pole held by a person who moves across the field. The sensors take 12 megapixel images in 550 (green), 660 (red), 735 (red-edge) and 790 (near-infrared) bands. The images were captured in a sunny day around noon. GPS was used to geo-tag the images. Images were taken every 1.5 meter which allows some overlap. There has been some preprocessing including color and illumination corrections. They proposed three different methods, one is based on spatial features only, another based on spectral features and the last one based on the combination of these two.

1.5.1 Spatial method

The algorithm proposed for this method uses the spatial information and some well-known image processing techniques to detect rows on which plants are sowed. It comprises of following steps:

- Using Fourier Transform to find the row orientation.
- Discerning Soil from Vegetation using NDVI index.
- Using Hough Transform to detect lines that correspond to crop rows. The angle of the lines are limited to the orientation of the row which was calculated in the first step. Only the vegetation pixels are used.
- Finding the edges of the vegetations using connected components and linear regression on both sides of the row.
- Crop and weed detection using a decision tree based on shape of the connected components. (axis orientation, area, etc.)

2 Combining computer vision and deep learning to enable ultra-scale aerial phenotyping and precision agriculture: A case study of lettuce production [1]

This paper is discussing a novel Deep-Learning-based approach in analyzing yield-related crop phenotyping. They equipped fixed-wing light aircrafts with NDVI sensors to acquire the desired images. The platform which is called Aursurf-lettuce, is capable of scoring and categorizing iceberg lettuces with more than 98 percent accuracy. They trained their deep learning model using 100000 labeled lettuce signals. At the end, their platform is capable of producing a map of lettuce size (heat map) for detecting the areas that are ready for harvest.

Growing lettuce is highly affected by the weather. Bad weather can cause reduction in the quantity as well as quality of the products. In average only 70-80 percent of planted lettuces will be used in the market. The goal of this paper is to use deep learning methods to find the best time for harvesting the crops.

In this paper they introduced Aursurf as an open source yield-related phenotyping analysis platform. In short, they capture NDVI images using NDVI sensors, then use CNNs to count crops in each image and other supervised ML techniques for assessing the quality of each individual crop. A customized and commercialized version of Aursurf (Aursurf-Lettuce) is used for lettuce.

2.1 Material and Methods

2.1.1 Normalized Difference Vegetation Index (NDVI)

NDVI is a well-known index which is widely used to discern between vegetation and non-vegetation areas in an image usually from a field or a forest. It is used to determine how dense vegetation is in an area. According to biologists, plants re-emit solar radiation in the Near-Infrared spectral (NIR) due to the fact that those radiations do not have enough energy to be used in photosynthesis and only result in overheating the plants if absorbed. Therefore, plants are relatively bright in NIR band. On the other hand, snow, clouds and other materials are relatively dark in NIR but relatively bright in Red spectral band. Scientists have been using these facts to define a vegetation index using the following formula:

$$NDVI = \frac{NIR - RED}{NIR + RED}$$

This is called Normalized Difference Vegetation Index or NDVI. It is usually between -1 and 1 but most of the surfaces on earth produce a number between 0 and 1. An NDVI close to 1 shows a dense vegetation at that specific area in an image.

Due to the usefulness of this index, there has been NDVI cameras developed in the past years. In this paper, they equipped their light aircraft with such a camera which were able to capture NDVI images at the height of around 300m (1000 feet) when the aircraft was flying with a speed of 180 to 200 km/h. The farmers regularly capture NDVI images 4-5 times each season. Each image is 1.5 - 2 GB in size. They used the acquired images of one field to train the models. For validating the final model, farmers counted all the crops in that specific field manually and labeled some randomly chosen lettuces for quality assessment phase.


2.1.2 The dataset

From the NDVI images acquired, they randomly selected 60 subsections each containing between 300 and 1000 lettuce heads. Then they labeled them using 20 by 20 pixel bounding boxes. Then a balanced training dataset of 100000 patches of size 20 by 20 were created to train a CNN for classifying lettuce vs non-lettuce. Then a non-overlapping slide window was applied over the images to separate foreground

and background using this CNN. Note that training and testing sets were balanced and a validation set is used to avoid overfitting of the network.

2.1.3 The analysis workflow of the platform

The following image summarizes the workflow of the proposed method.

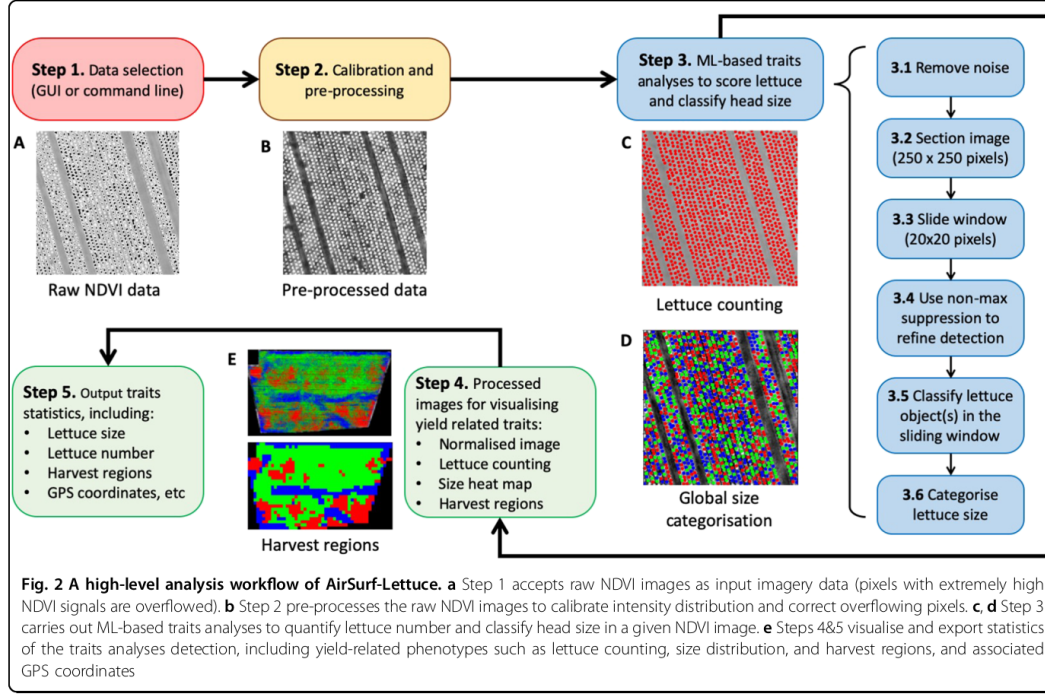

References

- [1] Alan Bauer, Aaron George Bostrom, Joshua Ball, Christopher Applegate, Tao Cheng, Stephen Laycock, Sergio Moreno Rojas, Jacob Kirwan, and Ji Zhou. Combining computer vision and deep learning to enable ultra-scale aerial phenotyping and precision agriculture: A case study of lettuce production. *Horticulture research*, 6(1):70, 2019.
- [2] Marine Louargant, Gawain Jones, Romain Faroux, Jean-Noël Paoli, Thibault Maillot, Christelle Gée, and Sylvain Villette. Unsupervised classification algorithm for early weed detection in row-crops by combining spatial and spectral information. *Remote Sensing*, 10(5):761, 2018.