



IndieDuck R18 / Compact neck bearing

Armature AI Labs | actual CAD projections | dimensions in mm | A3 landscape

A-A / X = 41 / cropped section / 4:1

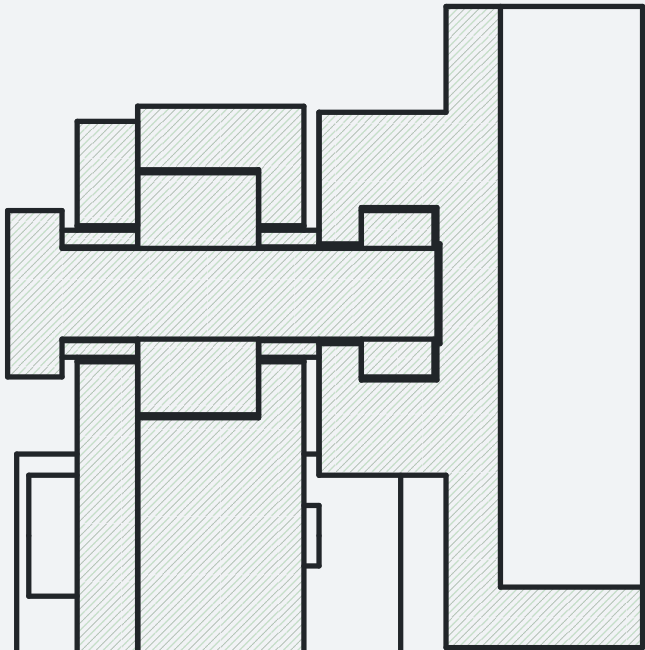


OUTBOARD END / actual assembled stack / 3:1

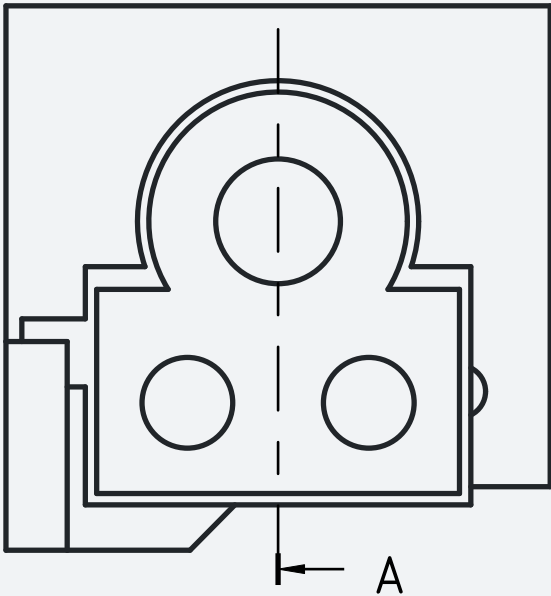

Bearing axis: X41, Z152.5; 50 mm neck span retained.
Carrier: OD12.4 around seat OD8.2; radial wall 2.1.
Bearing shoulder 1.5; moving-boss axial gap 0.5.
Blind fastener leaves 2.0 to the servo mating face.

EXPLODED HARDWARE / actual shapes / 1.65:1

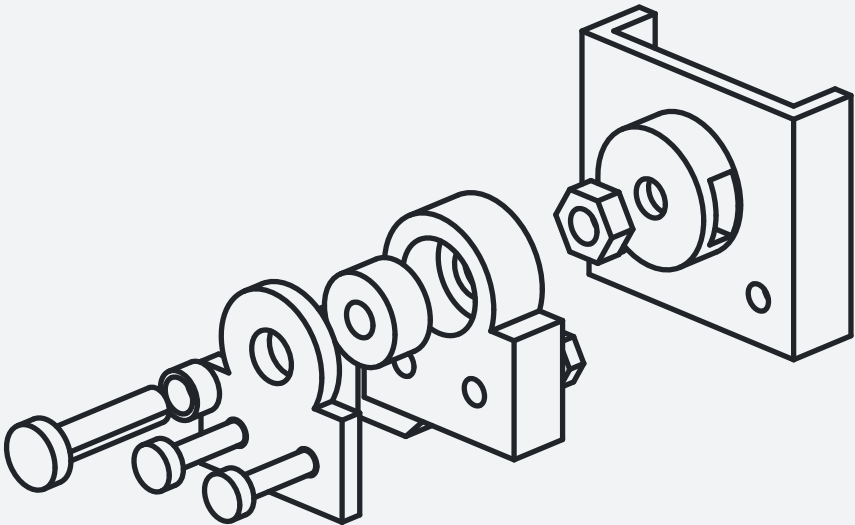

OUTBOARD TO INBOARD:
Head 1.8 / spacer 2.5 / bearing 4 / spacer 2.0 / boss.
Pin: precision OD3 land 8.5; M3 thread 3.9; total 14.2.
Spacers: ID3.1, OD4.2. Verify inner-race-only contact.
M3 nut: AF5.5 x 2.4 in AF5.7 x 2.5 side-load trap.
Retainer: 2.0; 2 x M2 x 8 and AF4 x 1.6 metal nuts.
Service with BodyFront removed; no shell carving.
Vendor, fits, thread/driver details and preload unverified.

Source 1.8 back and 2.0 rails retained.
No added sampled neck-motion regression;
existing R17 collisions remain unresolved.

