



Features

- Designed for centralized vacuum system
- Precision step less control to ensure high-stability
- Suitable for complex suction procedures
- Two stage protection from system contamination
- Vacuum trap in series
- Easily replaceable hydrophobic microbiological filter
- ON/OFF switch for quick opening and closing
- Compatible to commonly used probes / connectors
- Mountable directly on terminal units or rail system


Application Possibilities

1. Nasal suction
2. Gastrointestinal suction
3. Tracheal suctioning
4. Oral suction
5. Nasopharyngeal or pharyngeal suction

Conforms to: IS / ISO 10079 - 3 : 2014, IS / ISO 7396 - 1 : 2016 + A1 : 2017
HTM 02-01 Part A-2006

Certifications: ISO 9001:2015 - Quality Management Systems
ISO 13485:2016 – Medical devices – Quality Management Systems

Dimensions

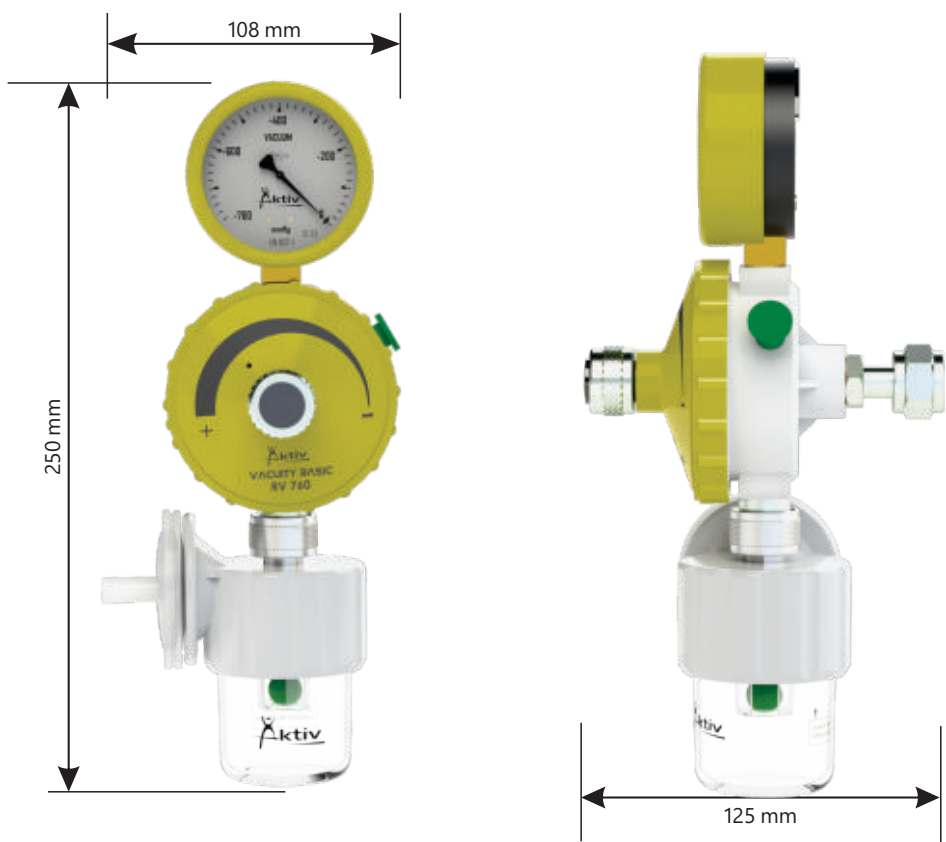

Technical Specifications

Conforms to : IS / ISO 10079 - 3 : 2014, IS / ISO 7396 - 1 : 2016 + A1 : 2017, HTM 02-01 Part A-2006

Model	Description	Controllable Range (mmHg)	Gauge Range (mmHg)	Free Flow (lpm)	Ordering Code
Vacuity Basic Adult	Adult regulator with analog gauge and trap bottle + filter	0-300	0-760	0-60	6022330
Vacuity Basic Pediatric	Pediatric regulator with analog gauge and trap bottle + filter	0-100	0-300	0-40	6022430

Notes:

- 1. Operational only with centralized vacuum system of MGPS at (-)600mmHg {(-)800mbar} line pressure.
- 2. Gauge indicator - Counter clockwise movement.
- 3. Vacuum regulators are compatible to American, British, DIN and outlets of other standards (optional).
- 4. Refer to "Vacuity Collection Jar" brochure for compatible Collection Jars.

Accessories:



Trap Bottle
Ordering Code: 6022510



Bacteria Filter (Pack of 20)
Ordering Code: 6022511



Corporate Office : Plot No. 691, Sector 69, IMT, Faridabad, Haryana 121004, INDIA
Tel: +91-7291838253
Email: aktivtechnologies@gmail.com, sanjay.aktiv@gmail.com
Website : www.aktivtechnologies.com



Consult Instructions
for Use

LIT / 602A Rev 00 12/21

Disclaimer: Due to our policy of continuous product improvement, Aktiv Technologies reserve the right to alter dimensions and/or specification without notice although every effort will be made to advise of any such modifications.