
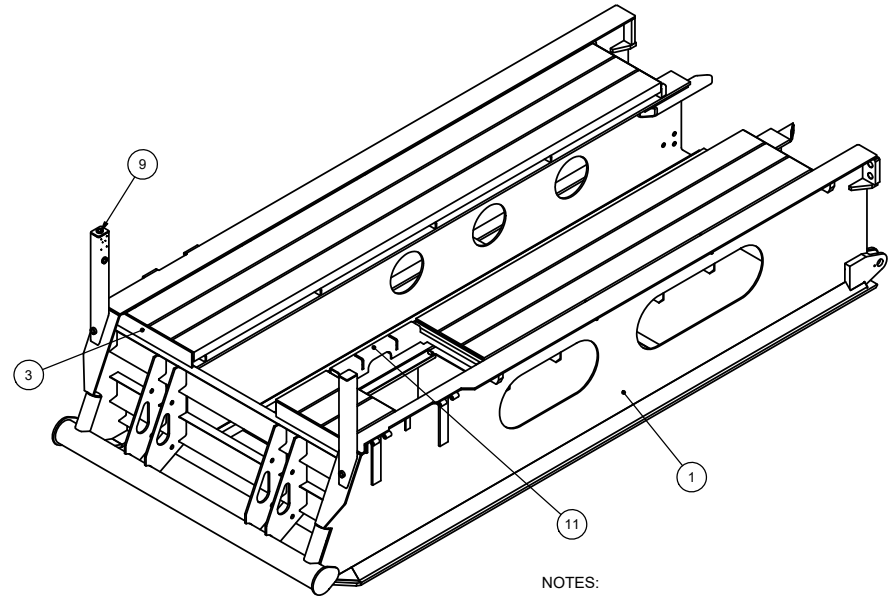


11 10 9 8 IF IN DOUBT...PLEASE ASK!

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	WELDMENT, R2D CATWALK, LEV 2, PC4100		AY30012
2	1	WELDMENT, PANEL GUARD, PC4100	ASTM A516 Gr. 70/S275JR	DT34384
3	2	PLATE, SLAVE SKID CHANNEL CAP, PC4100	A572 Gr. 50	DT34383
4	1	HSS,RIGHT SIDE LASER POST, PC4100	A36/S275JR	DT34381
5	1	HSS,LEFT SIDE LASER POST, PC4100	ASTM A572 Gr. 50 / S355JR	DT34382
6	3	CHANNEL, UPN200X 464 LG	A572 Gr. 50	
7	3	CHANNEL, UPN200X4321.175 LG	A572 Gr. 50	
8	4	BAR, FLAT, 30 X 10 X 622 LG	A572 Gr. 50	
9	5	COUPLING, HALF, 3/4" NPT	-	
10	3	CHANNEL, UPN200 X 3025 LG	A572 Gr. 50	
11	1	WELDMENT, HINGED FLOOR MNT, PC4100		AY30014

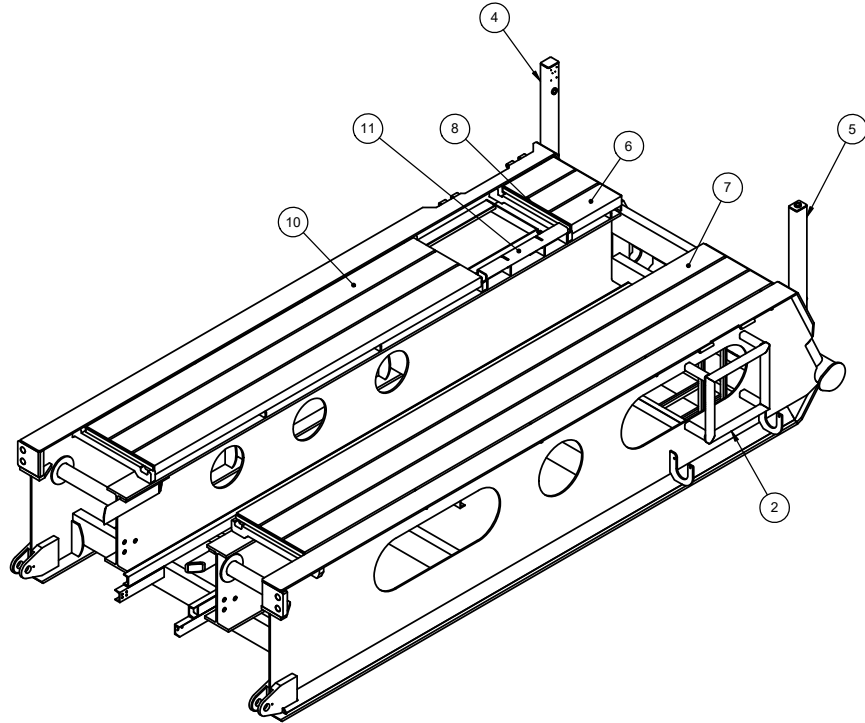

NOTES:

1. ALL WELDS 6mm (1/4") SEAL WELD UNLESS OTHERWISE NOTED.
BEVEL WELD
AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
2. NOTES CONTINUED ON SHEET 2

A	PRODUCTION RELEASE	3280
REV	REVISION DESCRIPTION	ECN


WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE	
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.	UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-1994 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.3-1995 REMOVE SHARP CORNERS AND BURRS 1 RUN OUT 0.03 2 STRAIGHTNESS 0.06 IN 5 INCHES 3 PERPENDICULARITY 0.10 IN 5 INCHES 4 PARALLELISM 0.10 IN 5 INCHES 5 FLATNESS 0.10 or as Shown 6 MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX. 7
TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING IMPERIAL FABRICATING METRIC 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 30" ± 1/8" 610 TO 1525 ± 3 mm 30 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 260" ± 1/4" 3048 TO 7112 ± 7 mm 260" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING IMPERIAL MACHINING METRIC DECIMAL x ± .030" DECIMAL x ± .8 mm xxx ± .015" xxx ± .40 mm ANGULAR ± 1° FABRICATING ± 2°	INITIAL DESIGN MODELED JTC 2018/01/15 DRAWN JTC 2018/01/15 CHECKED G.Young 2019-04-11 APPROVED RELEASE DATE 2019-04-15 REVISION MODELED J.A.Flores 2019-04-08 DRAWN J.A.Flores 2019-04-08 CHECKED G.Young 2019-04-11 APPROVED T.Burke 2019-04-15 REVISION RELEASE DATE 2019-04-15

SHEET 1 OF 3	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	
SHEET SIZE D	
WELDMENT, PC4100 R2D SLAVE SKID, PC4100	
EST. WEIGHT 4034 Kg (8874.8 lbs)	SCALE 1:16
AY30013	REV A




11 10 9 8 IF IN DOUBT...PLEASE ASK! 5 4 3 2 1


11 10 9 8 IF IN DOUBT...PLEASE ASK! 5 4 3 2 1

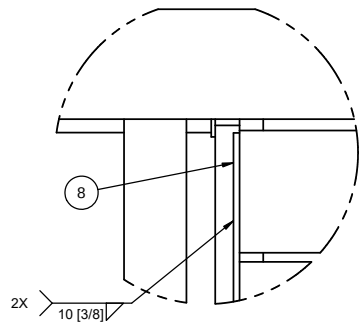


DETAIL A
SCALE 1 : 4

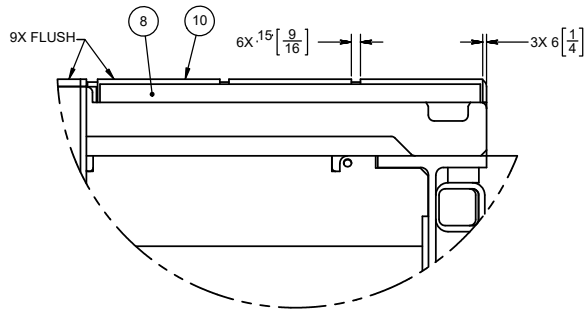



DETAIL B
SCALE 1 : 4

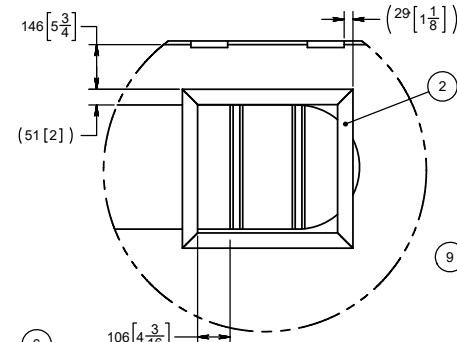



DETAIL C
SCALE 1 : 8



DETAIL D
SCALE 1 : 8

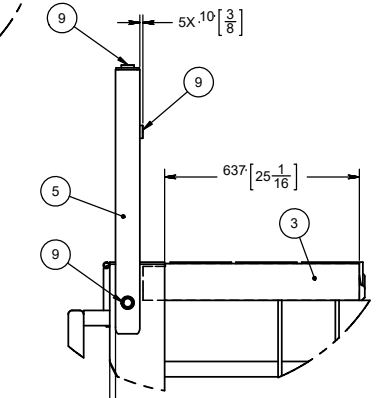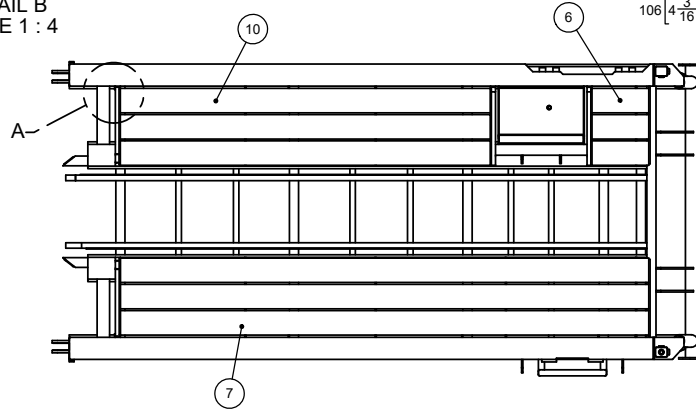

DETAIL E
SCALE 1 : 8

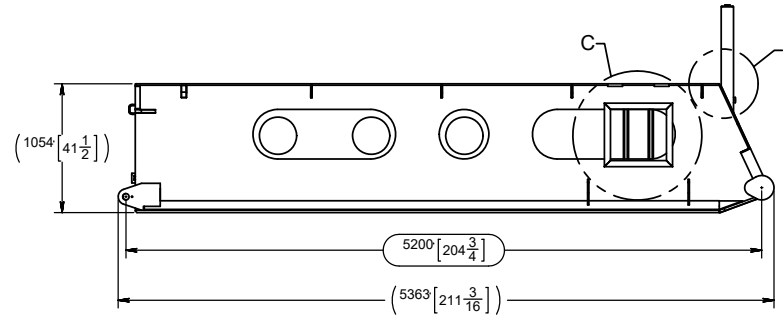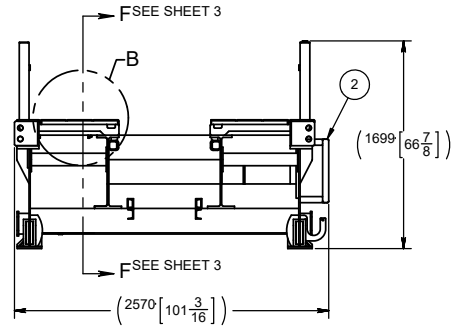

NOTES:

- ALL WELDS 6mm (1/4") SEAL WELD UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS
- NOTES CONTINUED ON SHEET 3

UNLESS OTHERWISE SPECIFIED
SEE SHEET 1 FOR DEFAULT
TOLERANCES AND
SPECIFICATIONS

CONFIDENTIAL AND
PROPRIETARY. THE USE,
REPRODUCTION OR
DISTRIBUTION WITHOUT
PRIOR WRITTEN CONSENT IS
PROHIBITED. ALL RIGHTS
RESERVED.

SCALE 1:20 SHEET SIZE D

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

WELDMENT, PC4100 R2D SLAVE SKID, PC4100


SHEET 2 OF 3

AY30013


REV A




11 10 9 8 IF IN DOUBT...PLEASE ASK! 5 4 3 2 1

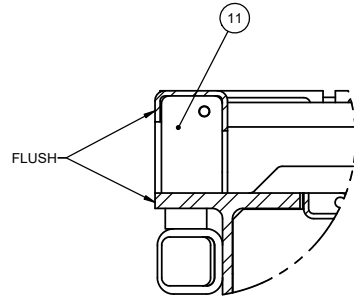

DETAIL H
SCALE 1 : 3

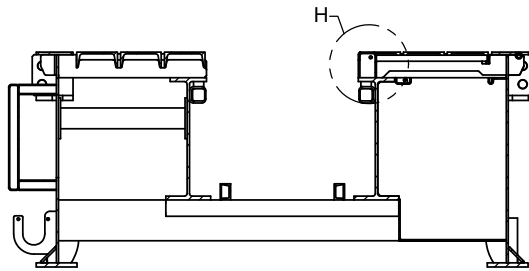

SECTION G-G

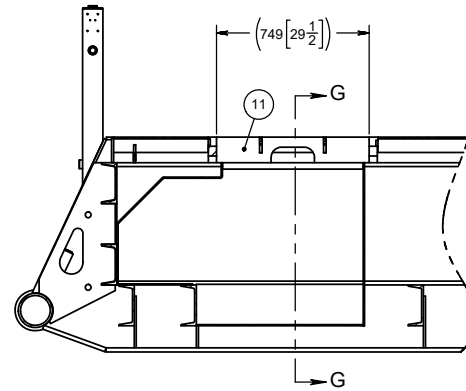

SECTION F-F

NOTES:


- ALL WELDS 6mm (1/4") SEAL WELD UNLESS OTHERWISE NOTED. BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS

UNLESS OTHERWISE SPECIFIED
SEE SHEET 1 FOR DEFAULT
TOLERANCES AND
SPECIFICATIONS

CONFIDENTIAL AND
PROPRIETARY. THE USE,
REPRODUCTION OR
DISTRIBUTION WITHOUT
PRIOR WRITTEN CONSENT IS
PROHIBITED. ALL RIGHTS
RESERVED.

SCALE 1:12 SHEET SIZE D

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

WELDMENT, PC4100 R2D SLAVE SKID, PC4100

SHEET 3 OF 3

AY30013

REV A

