

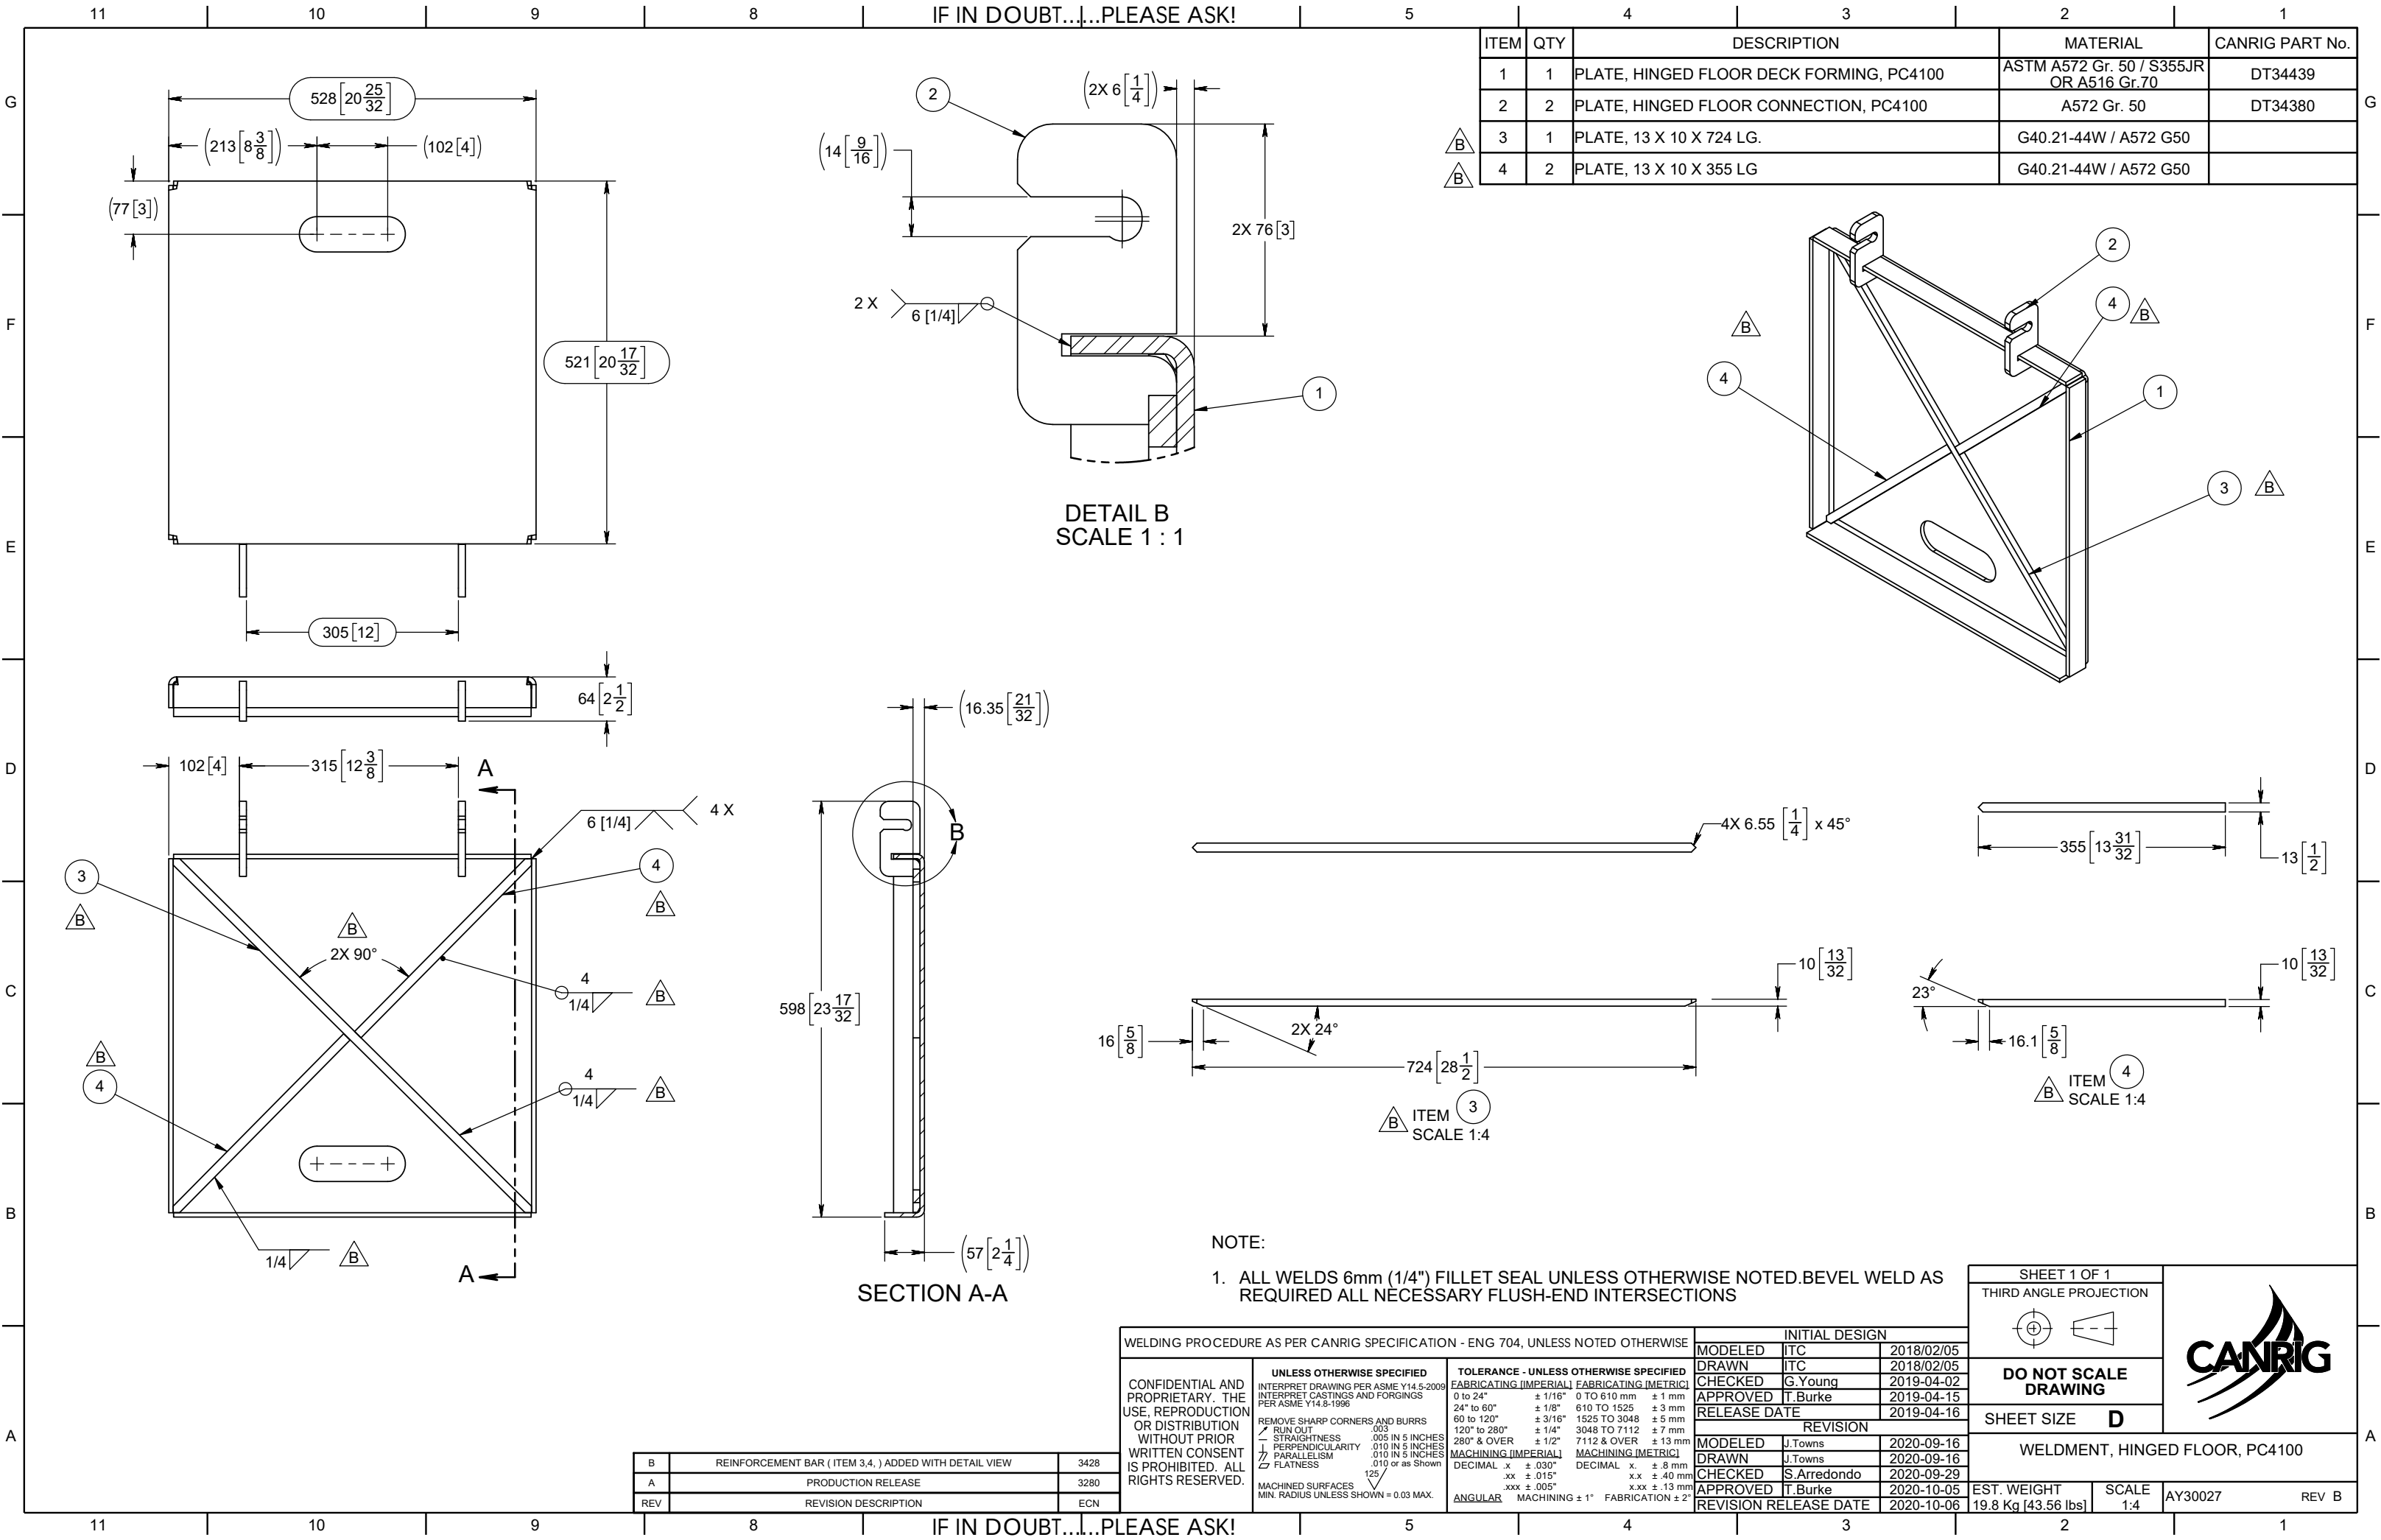


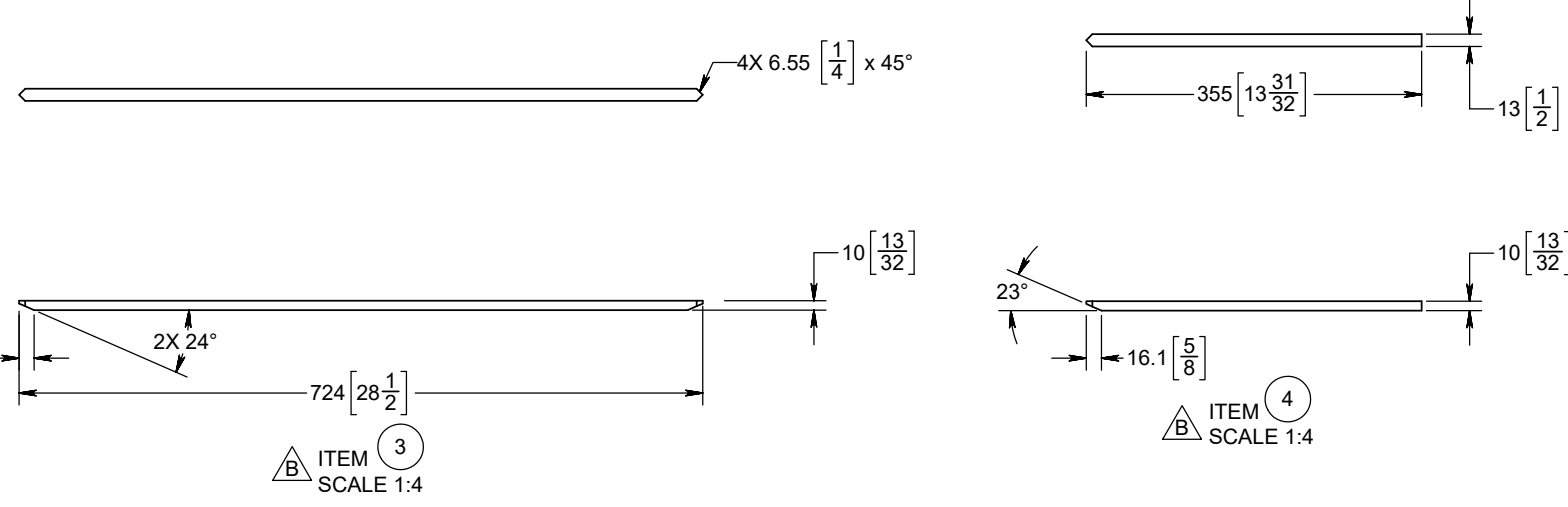

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE, HINGED FLOOR DECK FORMING, PC4100	ASTM A572 Gr. 50 / S355JR OR A516 Gr.70	DT34439
2	2	PLATE, HINGED FLOOR CONNECTION, PC4100	A572 Gr. 50	DT34380
3	1	PLATE, 13 X 10 X 724 LG.	G40.21-44W / A572 G50	
4	2	PLATE, 13 X 10 X 355 LG	G40.21-44W / A572 G50	

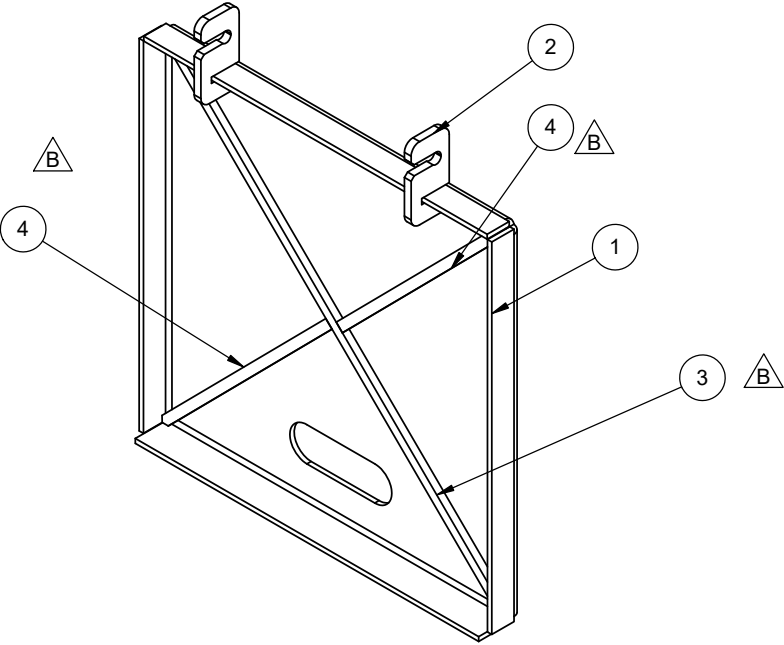

NOTE:
1. ALL WELDS 6mm (1/4") FILLET SEAL UNLESS OTHERWISE NOTED.BEVEL WELD AS REQUIRED ALL NECESSARY FLUSH-END INTERSECTIONS

B	REINFORCEMENT BAR (ITEM 3.4,) ADDED WITH DETAIL VIEW	3428
A	PRODUCTION RELEASE	3280
REV	REVISION DESCRIPTION	ECN

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE			INITIAL DESIGN		
CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.			MODELED	ITC	2018/02/05
			DRAWN	ITC	2018/02/05
			CHECKED	G.Young	2019-04-02
			APPROVED	T.Burke	2019-04-15
UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING PER ASME Y14.5-2009 INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996 REMOVE SHARP CORNERS AND BURRS / RUN OUT .003 - STRAIGHTNESS .005 IN 5 INCHES / PERPENDICULARITY .010 IN 5 INCHES / PARALLELISM .010 IN 5 INCHES / FLATNESS .010 or as Shown MACHINED SURFACES MIN. RADIUS UNLESS SHOWN = 0.03 MAX.			REVISION		
			MODELED	J.Towns	2020-09-16
			DRAWN	J.Towns	2020-09-16
			CHECKED	S.Arredondo	2020-09-29
TOLERANCE - UNLESS OTHERWISE SPECIFIED FABRICATING [IMPERIAL] FABRICATING [METRIC] 0 to 24" ± 1/16" 0 TO 610 mm ± 1 mm 24" to 60" ± 1/8" 610 TO 1525 ± 3 mm 60 to 120" ± 3/16" 1525 TO 3048 ± 5 mm 120" to 280" ± 1/4" 3048 TO 7112 ± 7 mm 280" & OVER ± 1/2" 7112 & OVER ± 13 mm MACHINING [IMPERIAL] MACHINING [METRIC] DECIMAL .x ± .030" DECIMAL .x ± .8 mm .xx ± .015" .xx ± .40 mm .xxx ± .005" .xxx ± .13 mm ANGULAR MACHINING ± 1° FABRICATION ± 2°			APPROVED	T.Burke	2020-10-05
			REVISION RELEASE DATE	2020-10-06	
			SHEET 1 OF 1 THIRD ANGLE PROJECTION DO NOT SCALE DRAWING SHEET SIZE D WELDMENT, HINGED FLOOR, PC4100		
			EST. WEIGHT	SCALE	REV B
			19.8 Kg [43.56 lbs]	1:4	AY30027

