IF IN DOUBT...|...PLEASE ASK!

ITEM	QTY	DESCRIPTION	MATERIAL	CANRIG PART No.
1	1	PLATE, 3/8 x 13 x 36 [10 x 330 x 914]	G40.21-44W / A572 G50	
2	2	PLATE, 3/8 x 16 1/4 x 13 [10 x 413 x 330]	G40.21-44W / A572 G50	

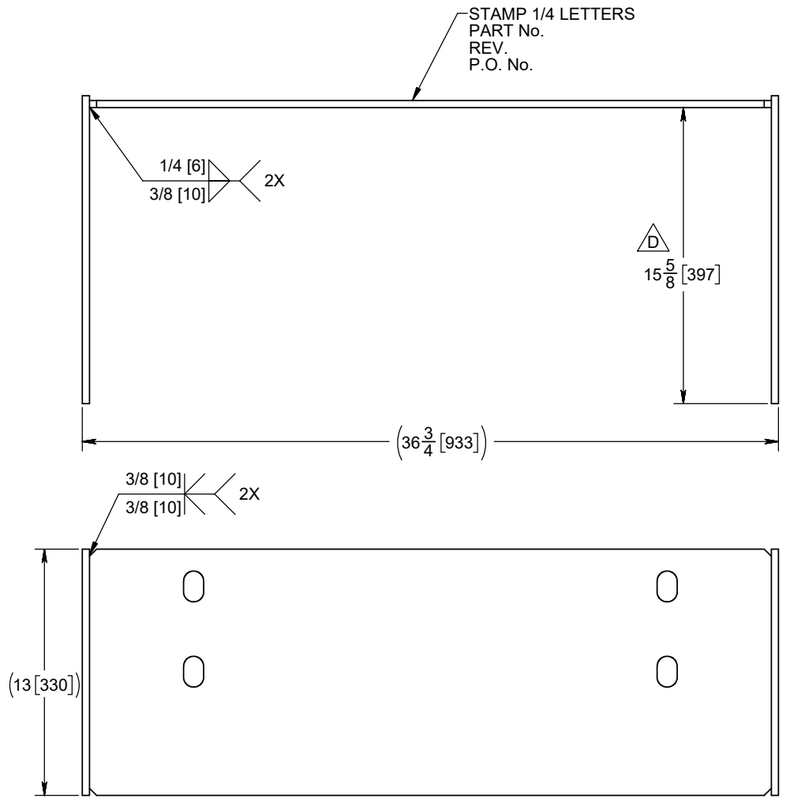



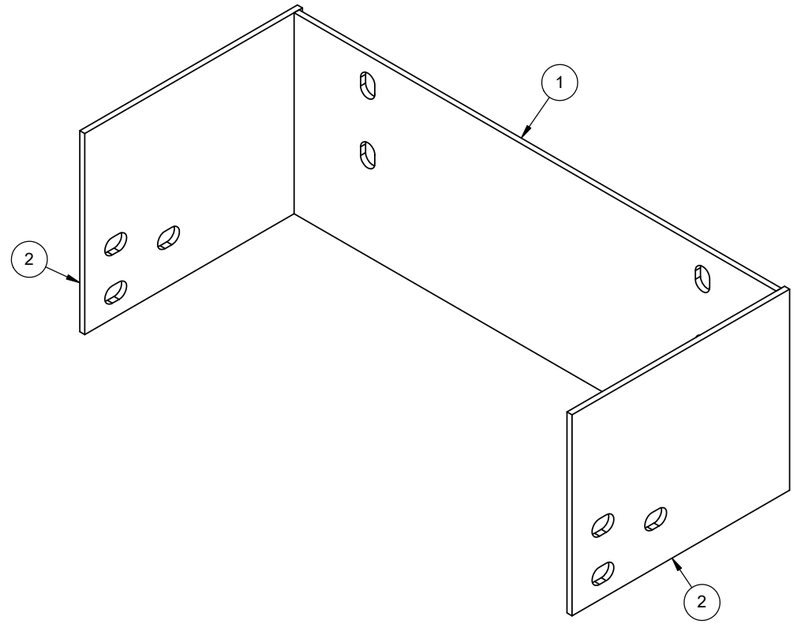

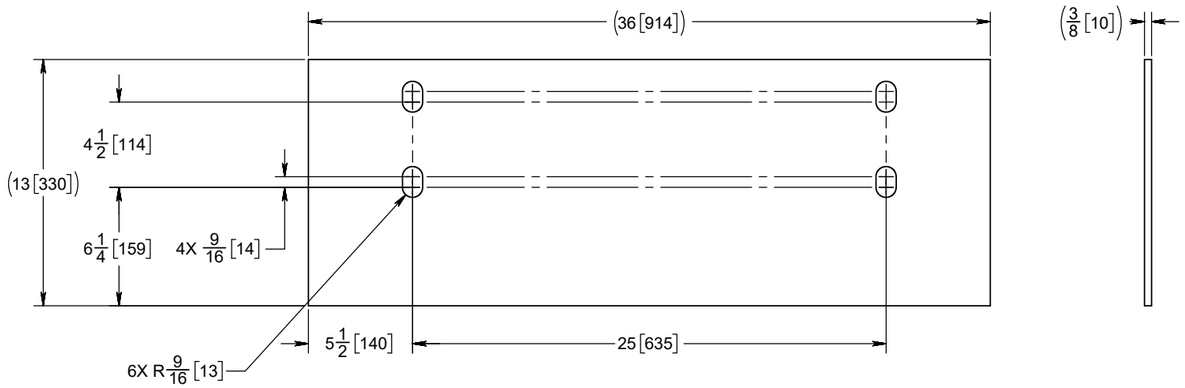

ITEM (1)

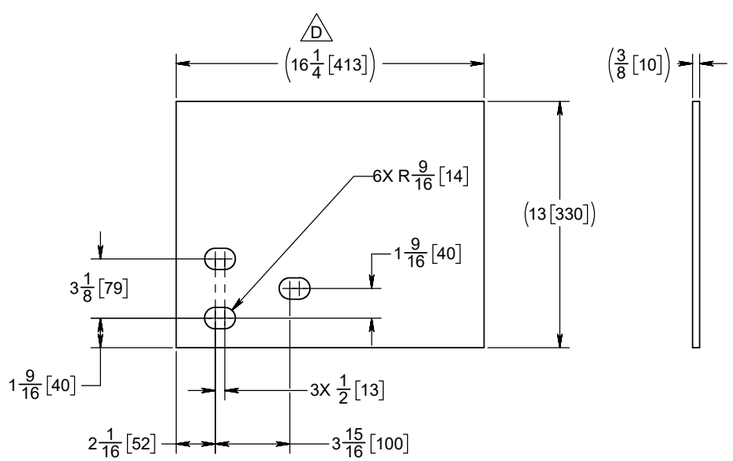

ITEM (2)

REV	REVISION DESCRIPTION	ECN
D	ITEM 2 LENGTH UPDATED TO 16 1/4 WAS 9 1/4 & MISSING DIM.15 5/8 ADDED. NEW TITLE BLOCK UPDATED	3370
C	UPDATED TO CURRENT DRAFTING STANDARDS; ITEM 1: WAS 38 LG IS: 36" LONG; ITEM 1 IS INSET OF ITEM 2	2612
B	ADDED STAMPING LOCATION	CN 1411
A	UPDATED AS PER METRIC UNIT/UPDATED DRAWING FORMAT	

CONFIDENTIAL AND PROPRIETARY. THE USE, REPRODUCTION OR DISTRIBUTION WITHOUT PRIOR WRITTEN CONSENT IS PROHIBITED. ALL RIGHTS RESERVED.

WELDING PROCEDURE AS PER CANRIG SPECIFICATION - ENG 704, UNLESS NOTED OTHERWISE

UNLESS OTHERWISE SPECIFIED

INTERPRET DRAWING PER ASME Y14.5-2009
INTERPRET CASTINGS AND FORGINGS PER ASME Y14.8-1996

REMOVE SHARP CORNERS AND BURRS

RUN OUT	.003
STRAIGHTNESS	.005 IN 5 INCHES
PERPENDICULARITY	.010 IN 5 INCHES
PARALLELISM	.010 IN 5 INCHES
FLATNESS	.010 or as Shown

MACHINED SURFACES 125
MIN. RADIUS UNLESS SHOWN = 0.03 MAX.

TOLERANCE - UNLESS OTHERWISE SPECIFIED

FABRICATING [IMPERIAL]		FABRICATING [METRIC]	
0 to 24"	± 1/16"	0 TO 610 mm	± 1 mm
24" to 60"	± 1/8"	610 TO 1525	± 3 mm
60 to 120"	± 3/16"	1525 TO 3048	± 5 mm
120" to 280"	± 1/4"	3048 TO 7112	± 7 mm
280" & OVER	± 1/2"	7112 & OVER	± 13 mm

MACHINING [IMPERIAL]		MACHINING [METRIC]	
DECIMAL .x	± .030"	DECIMAL x.	± .8 mm
.xx	± .015"	x.x	± .40 mm
.xxx	± .005"	x.xx	± .13 mm
ANGULAR	MACHINING ± 1°		FABRICATION ± 2°

INITIAL DESIGN		
MODELED	KH	06/07/25
DRAWN	KH	06/07/25
CHECKED	JR	06/07/25
APPROVED	GF	06/07/25
RELEASE DATE		-
REVISION		
MODELED	V.Martinez	2020-01-28
DRAWN	V.Martinez	2020-01-29
CHECKED	G.Young	2020-01-30
APPROVED	T.Burke	2020-02-03
REVISION RELEASE DATE		2020-03-19

SHEET 1 OF 1
THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

SHEET SIZE **D**

CANRIG

FRONT CARRIER SHIPPING MOUNT

EST. WEIGHT	SCALE		
93.2 lbs	1:4	131100547	REV D

IF IN DOUBT...|...PLEASE ASK!