



**FACULTY  
OF MATHEMATICS  
AND PHYSICS**  
Charles University

# **High Level Assembler Plugin**

## **Detailed Specification**

**Authors:** Bc. Michal Bali, Bc. Marcel Hruška, Bc. Peter Polák, Bc. Adam Šmelko, Bc. Lucia Tódová

**Supervisor:** RNDr. Miroslav Kratochvíl

**Consultant:** Ing. Slavomír Kučera

Prague 2019

# Contents

<b>Introduction</b>	<b>3</b>
<b>1 IBM High Level Assembler Language overview</b>	<b>5</b>
1.1 Syntax . . . . .	5
1.1.1 Statement . . . . .	5
1.1.2 Continuation . . . . .	6
1.2 Assembling . . . . .	6
1.2.1 Conditional assembly . . . . .	7
1.2.2 Ordinary assembly . . . . .	8
<b>2 Requirements</b>	<b>11</b>
2.1 Language features . . . . .	11
2.2 LSP features . . . . .	11
<b>3 Architecture</b>	<b>13</b>
3.1 Parser library . . . . .	13
3.1.1 Workspace manager . . . . .	13
3.1.2 Analyzer . . . . .	13
3.1.3 Debugger . . . . .	13
3.2 Language server . . . . .	13
3.3 VS code client . . . . .	13
<b>4 Technologies</b>	<b>15</b>
<b>5 Project execution</b>	<b>17</b>



# Introduction

## Related Work



# 1. IBM High Level Assembler

## Language overview

In general, high-level assemblers provide for their assembly languages features that are commonly found in high-level programming languages. Hence, in addition to ordinary machine instructions they also contain control statements similar to *if*, *while*, *for* as well as custom callable macros.

IBM High Level Assembler (HLASM) comforts this definition and adds other features which will be described in this chapter.

### 1.1 Syntax

Because of historical reasons HLASM syntax is fairly complicated. Its line length is limited to 80 characters as it was in times when punch cards were used.

Besides this HLASM uses syntax common to regular assemblers.

#### 1.1.1 Statement

HLASM program is sequence of *statements*. Statement consists of four fields. Those are:

- **Name field** — Serves as a place for named constants that are to be used in code. The field is optional but when present it must start in the begin column of a line.
- **Operation field** — Instruction that is executed. The only field that is mandatory. Must not begin in the first column as it would be interpreted as a name field.
- **Operands field** — Field for instruction operands separated by comma located immediately after operation field. According to instruction used it can be any sequence of characters, apostrophe separated string or blank.
- **Remark field** — Serves as inline commentary. Optionally located after operands field or operation field when operands are blank.

This is an example of basic statement using all field.

label	instruction	operands	remarks
.NOMOV	AGO	(&WH).L1,.L2,.L3	SEQUENTIAL BRANCH

### 1.1.2 Continuation

One line in HLASM source code can contain only up to 80 characters. However, sometimes statement is too long to be written in one line. Therefore, special handling is introduced called **continuation**.

Firstly, let us elaborate more on the topic of line column. There are four special columns:

- **Begin column** (default 1)
- **End column** (default 71)
- **Continuation column** (default 72)
- **Continue column** (default 16)

They all serve different purpose. *Begin column* states start of the statement or where name field should be written. Anything after *end column* does not count as the content of a statement, rather it is used as a place for the line sequence number (see 1.1).

*Continuation column* is used for indication that statement continues on the next line (to correctly indicate we write there arbitrary character other than space). Then the remainder of the statement must start on *continue column* to finally create a well formed statement.

Here is an example of an instruction where its last operand exceeded 72. column of the line.

```
OP1                                REG12,REG07,REG04,REG00,REG01,REG11,Rx
EG02
```

However, there are some instructions that allow so called *extended format* of operands allowing continuation even when the contents of a line have not reached the continuation column.

```
AIF    ('&VAR' FIND '~').A,      REMARK1                x
        ('&VAR'  EQ  'L').B,      REMARK2                x
        (T'&VAR  EQ  'U').C      REMARK3
```

## 1.2 Assembling

Having briefly described syntax, this section prepares reader to better understand assembly process hidden behind HLASM.

We can divide assembling into two interlinked steps, **conditional assembly** and **ordinary assembly**.

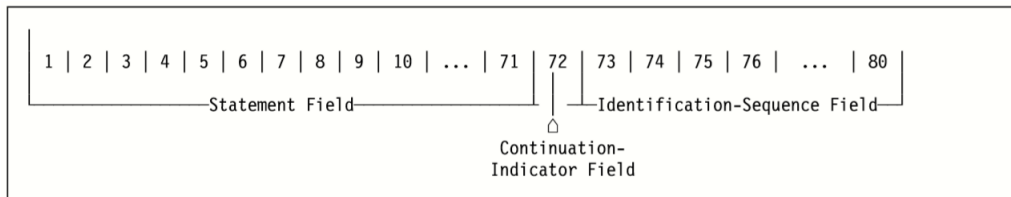


Figure 1.1: Description of line columns (source HLASM Language Reference [https://www-01.ibm.com/servers/resourcelink/svc00100.nsf/pages/-zOSV2R3sc264940/\\$file/asmr1023.pdf](https://www-01.ibm.com/servers/resourcelink/svc00100.nsf/pages/-zOSV2R3sc264940/$file/asmr1023.pdf)).

### 1.2.1 Conditional assembly

This part of assembly process can be compared to C++ text preprocessor. In HLASM it is more complicated process so it has obtained the term *code generation*. It consists of **variable symbols**, **conditional assembly (CA) instructions** and **macros**.

#### Variable symbols

These symbols serve as points of substitution or information holders.

When they occur in a statement, they are substituted by their value to create a new statement. For example, in this manner user can write variable symbol in operation field of statement and generate any instruction that can be a result of substitution.

Variable symbols have also notion of types. Symbol can be integer, boolean or string. CA instructions gather this information for different sorts of conditional branching.

#### CA instructions

The major difference to other instructions is that they are not assembled into object code, they rather select which instructions will be processed by assembler next.

One subset of CA instructions operates on variable symbols. With them user can define variable symbols locally or globally, assign or update their value.

Other subset is capable of conditional and unconditional branching. HLASM provides big variety of built in binary or unary operations on variable symbols which can create complex conditional expressions. This is important in HLASM as you can alter flow of instructions that will be assembled into executable program.



## Macros

Macro is structure consisting of name, input parameters and sequence of statements called body. When they are called in HLASM program, each statement in the body is performed. Nested or recursive call of macros is allowed. Macro body can even contain such sequence of instructions that it can generate another macro definition ready for later use. With help of variable symbols, HLASM macros have power to create custom task specific macros.

### 1.2.2 Ordinary assembly

Ordinary assembly is a term for assembly other than conditional.

Assembly of *machine instructions* belong here. They and their operands are translated to sequence of bytes and written to executable program. HLASM differs from basic assemblers as it allows expressions as operands of those instructions. These expressions can contain constants as well as are capable of address arithmetics.

Assembly of *assembler instructions* also belong here. However, they are neither assembled nor completely ignored. They alter behavior of assembler.

#### Assembler instructions

The behavior of assembler is altered by these instructions in different ways. Let us enumerate some of them.

- **ICTL** — Changes previously described line columns (i.e. *begin column* at column 2 etc. ).
- **DC** — Reserves space in object code for data described in operands field and assembles them in place (i.e. assembles float, double, character array, address etc. ).
- **EQU** — Defines named constant with integer value or relative address value. These constants can be accessed by *conditional assembly*, hence alter it in custom manner.
- **COPY** — Copies whole file found in *copy member library*<sup>1</sup> and pastes it in place of the instruction.
- **CSECT** — Creates an executable control section. Serves as the beginning of a machine instruction sequence and start of relative addressing.

---

<sup>1</sup>Path to library is passed to assembler before the start of assembly.

Here is example of simple HLASM program with the description of its statements.

	name	operation	operands
[01]		MACRO	
[02]	&NAME	GEN_LABEL	
[03]	&NAME	EQU	*
[04]		MEND	
[05]			
[06]		COPY	REGS
[07]			
[08]	TEST	CSECT	
[09]	&VAR	SETA	L'DOUBLE
[10]		AIF	(&VAR EQ 4).END
[11]	LBL1	GEN_LABEL	
[12]		LR	3,2
[13]		L	8
[14]	LBL2	GEN_LABEL	
[15]	LEN	EQU	LBL2-LBL1
[16]		DC	(LEN)C'HELLO'
[17]	DOUBLE	DC	D'-3.729'
[18]	.END	ANOP	
[19]		END	

In lines 01-04 the reader can see *macro definition*. It is defined with a name GEN\_LABEL, variable NAME and has one instruction in body that assigns to label in NAME current address.

In line 06 there is use of *copy instruction* where it includes contents of REGS file.

Line 08 establishes start of executable section called TEST.

In line 09 integer value is assigned to variable symbol VAR. The value is the length attribute of non previously defined constant DOUBLE. The assembler looks for definition of the constant to properly evaluate conditional assembly expression. In the next line there is CA branching instruction AIF. If value of VAR equals 4, next lines are skipped and assembling continues on line 18 where branching symbol END is located.

Lines 12-13 shows example of machine instructions which are directly assembled into object code. Lines 11,14 are examples of macro call.

In line 15 to constant LEN is equated difference of two addresses. This value is next used to generate character data.

Instruction `DC` in line 17 creates value of type double and assigns its address to constant `DOUBLE`. This constant also holds information about length, type and other attributes of the data.

`ANOP` is empty assembler action and line 19 ends the program assembling.

As the reader may see, `HLASM` is heavily extended assembler with complex assembling phases. However, the result of that is programming language with large expressive power.

## 2. Requirements

-co ten nas produkt ma byt vseobecne zhrnutie

...je to extension ... doda support pre ... -cela tato sekcia uz je popisana niekde na CA wiki, mozno dobry zaklad

### 2.1 Language features

-zoznam veci jazyka co podporujeme

### 2.2 LSP features

-working plugin for vs code

- Go to definition for all symbols, macro definitions and copy members.
- Find all references
- Completion for instructions, defined symbols and macros
- Highlighting
- Hover

-non functional requirement - api kniznice??



## 3. Architecture

-JNI? asi by som nespominal

mirko:

a je fajn rozepsat vsechny API a takovy veci co sou po ceste

–velky graf vsetkych komponent –ku kazdemu odstavcek

### 3.1 Parser library

#### 3.1.1 Workspace manager

#### 3.1.2 Analyzer

Lexer

Parser

Processing

Checking

#### 3.1.3 Debugger

### 3.2 Language server

### 3.3 VS code client



## 4. Technologies

mirko: soupis konkrétních technologií a verzí antlr cmake jenkins json lib  
boost asio? docker

vscode theia che produkce zdrojaky poskytnute broadcom google test

–jenkins sa opytat ako s tym ze to nie je nase

jazyky typescript c++ cmake





## 5. Project execution

mirko:

- milestony

- gantt

- prirazeni lidi k projektum

- udelejte si cas na psani dokumentace

je fajn mit contingency plan, co delat kdyz se to dojebe nebo ltery ficury  
jsou jak prioritni

1. mesiac research jazyk 8t research zvolit parser 4t research zvolit ide 4t

2. mesiac implementacia LSP POC VSCode klient POC lexer 6 parser 8t

cmake 1t

3. mesiac do klienta semanticky highlighting assembler checker conditional assembly instructions expressions debugger POC

4. mesiac CA LSP features machine instruction checker 12t macro expansion

5. copy 4t machine expression 4t client-server continuation handling

6. DC ordinary 8t diagnostikz

7. ORDINARY LSP features code coverage 8t

8. benchmark testing 8t

9. dokumentacia

