VacuBoyForker VBF

For lifting equipment and forklifts up to 1.000 kg

Structure and Application

A specially developed vacuum lifter designed for use on forklifts or pallet trucks. The vacuum lifter is mounted onto the forks of the lifting device using fork shoes and fixed screw connections. Power is supplied either autonomously via batteries or through the base unit. Operation is carried out via a pendant control with spiral cable, which includes all functions.

- Power supply via forklift or pallet truck
- Acoustic warning device with power-failure alert
- Optional self-contained power supply via battery
- Horizontal transport of panel-shaped materials
- Suitable for smooth and textured surfaces
- Tiltable and rotatable versions available on request
- "BATT" and "ACCU" versions for mains-independent operation



VacuBoyForker VBF-250KG-ACCU

For large-format plastic panels up to 3.000 × 1.500 mm.



VacuBoyForker VB-250KG

For repositioning steel sheets.



VacuBoyForker VBF-1000KG

For lifting and transporting aluminium plates with thicknesses of up to 300 mm.




VacuBoyForker VBF-250KG-BATT

With self-contained batteries for picking large-format metal sheets.

VacuBoyForker VBF

Technical data

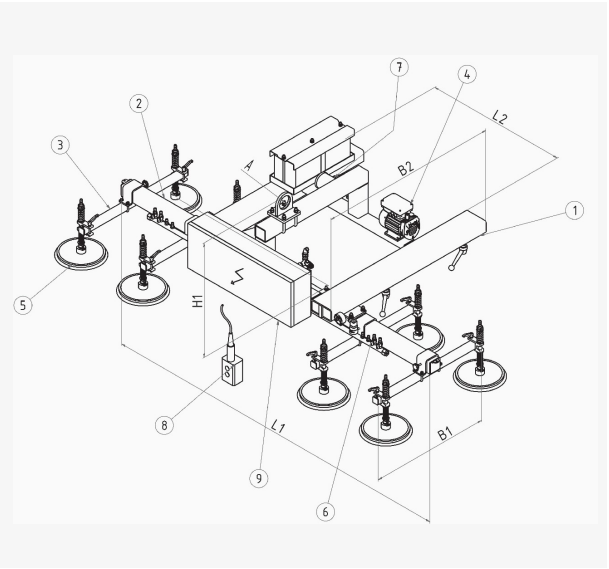

1. Suspension frame with forklift shoes and battery pack, optionally with swivel drives
2. Longitudinal beam with integrated safety reservoir
3. Transverse beam, adjustable and lockable
4. Vacuum pump with check valve
5. Adjustable and lockable suction pads
6. Distribution line with vacuum filter and visual control vacuum gauge
7. Vacuum valve for suction/release
8. Control unit with pendant control and spiral cable
9.

Load capacity (kg)	Type	Workpiece dimensions min (mm)	Workpiece dimensions max (mm)	Vacuum pump (m^3/h)	Number of suction pads	L1 (mm)	B1 (mm)	B2 (mm)	H (mm)	A (mm)	Dead weight (kg)
125	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	225
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	250
250	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	250
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	275
500	VBF80	1.000 x 1.000	2.000 x 1.000	TF 4.4	4	1.800	800	600	470	80	275
		2.000 x 1.000	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	470	80	300
750	VBF100	2.000 x 1.000	2.500 x 1.250	TF 4.4	4	1.800	800	600	570	100	350
		2.500 x 1.250	4.000 x 2.000	TF 4.4	8	3.000	1.200	900	570	100	375
1.000	VBF100	2.000 x 1.000	2.500 x 1.250	TF 4.4	8	1.800	800	600	570	100	375