



(Reference Photo)

EXTERNAL DIMENSIONS

Length (mm)	8615
Width (mm)	2518*
Height (mm) (empty)	3120
Wheel base (mm)	1800+3000+1350
Wheel track (mm)	Front 2030/2030; Rear 1850/1850
Front overhang (mm)	1490
GVM (Kg)	35000
Max speed (km/h)	100
Max climb gradient (%)	Theoretical 54%
Fuel tank (L)	250L

FEATURES

- Cummins X11EVI360 10.5L engine; 265 kW / 1900 rpm and 1800 Nm / 1000-1400 rpm.
- F12JZ20A 12-speed transmission with 0.78 overdrive top gear.
- Right-hand drive flat-roof short semi-sleeper cab for mixer applications.
- Four-point air suspension cab and air suspension driver seat.
- 7.5t disc front axle and 10t drum rear axle with dual differential locks.
- Four-airbag rear suspension designed for mixer platform stability.
- EBS + ESC, AEBS, FCWS, LDWS and reversing camera included.
- Right-side water tank reserved space: 1335 mm; customer target: 2000 mm.

WEIGHTS

GVM (kg)	35000
Front axle rating	7.5t + 7.5t
Rear axle rating	10t + 10t
GCM (kg)	To be confirmed

CAPABILITY

Max speed (km/h)	100
Max climb gradient (%)	54
Fuel tank (L)	250
Turning diameter	<20

ENGINE

Model	Cummins X11EVIE360
Displacement (L)	10.5
Power rating	265 kW / 1900 rpm
Max torque	1800 Nm / 1000-1400 rpm

TRANSMISSION

Model	F12JZ20A
Forward ratios	12.26, 9.56, 7.36, 5.73, 4.52, 3.52, 2.71, 2.11, 1.63, 1.27, 1.00, 0.78

FRAME

Model	Ladder framework
Main beam	1000-850 x 300 x 80 x (8+4)
Reserved water tank space	Right side 1335 mm

FRONT AXLE

Model	7.5t disc front axle
Type	Mercedes type front axle
Wheel track	2030 / 2030 mm

DRIVING AXLE

Model	10t drum oil-lubricated 440 axle
Differential lock	Interwheel / interaxle diff. lock
Ratio	4.44
Wheel track	1850 / 1850 mm

SUSPENSION

Front	Few-leaf spring 3/3
Rear	Four airbags, 2+ - / 2+ -
Cab suspension	Four-point air suspension

CABIN


Model	Flat-roof short semi-sleeper
Steering	Right-hand drive
Cab tilting	Electric + manual hydraulic
Seat	Air suspension seat

BRAKING / SAFETY

EBS + ESC	Included
AEBS	Included
FCWS	Included
LDWS	Included
Reverse camera	Included

ELECTRICS / COMFORT

Battery	180 Ah low-temperature
Remote key	2 key
Multimedia	MP5
Air conditioning	Semi-automatic

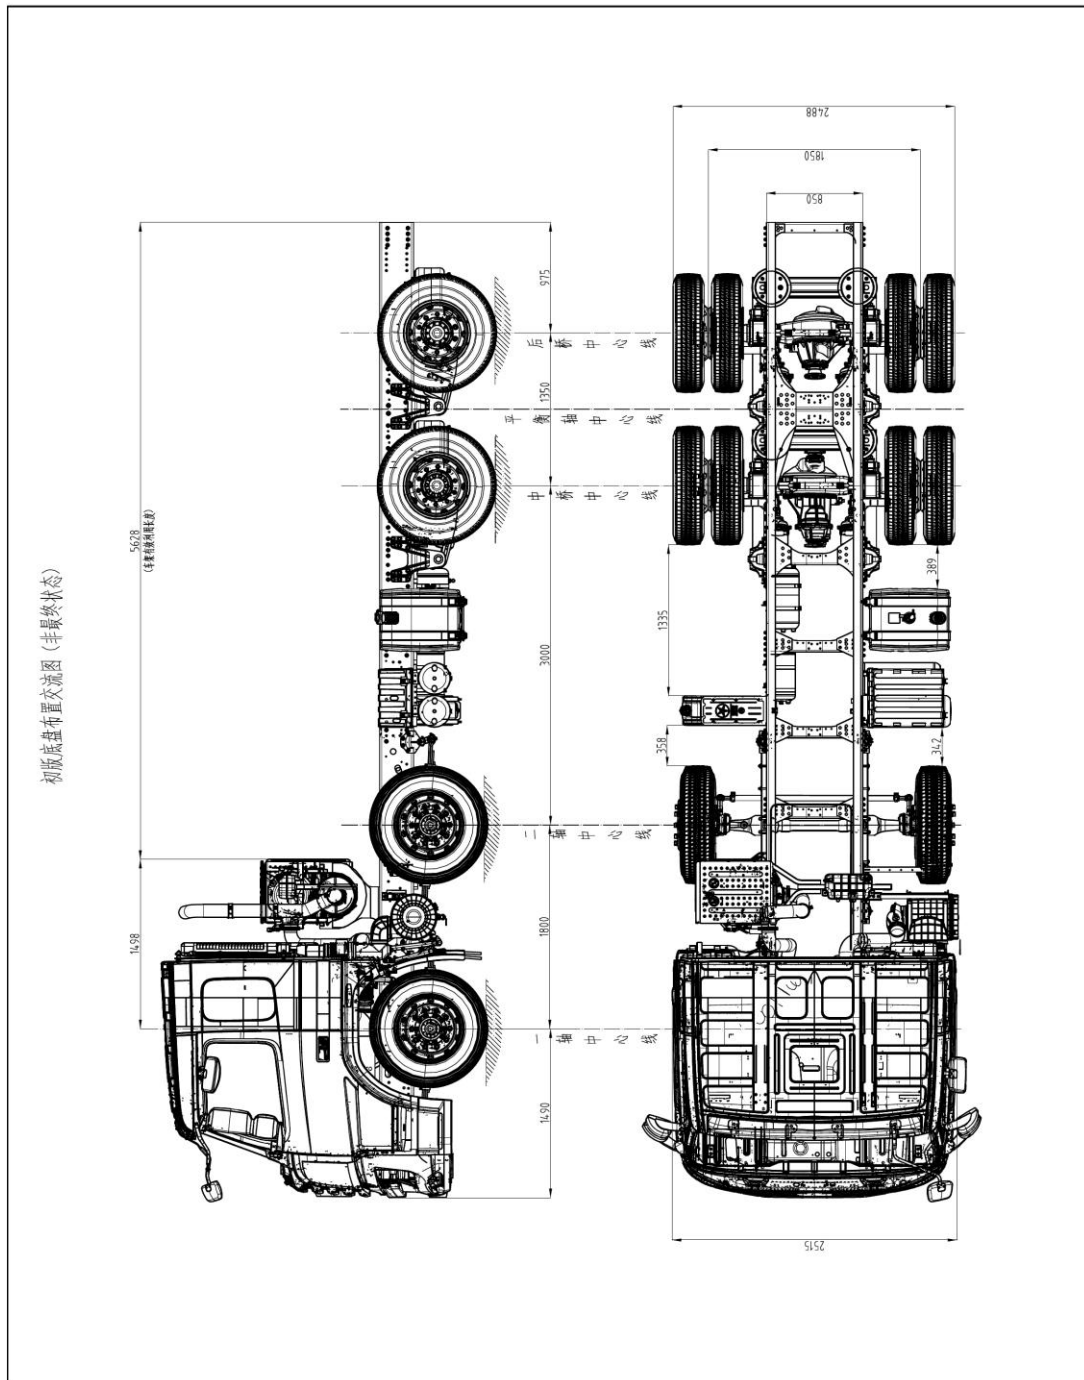

Preliminary chassis layout drawing (non-final status)