
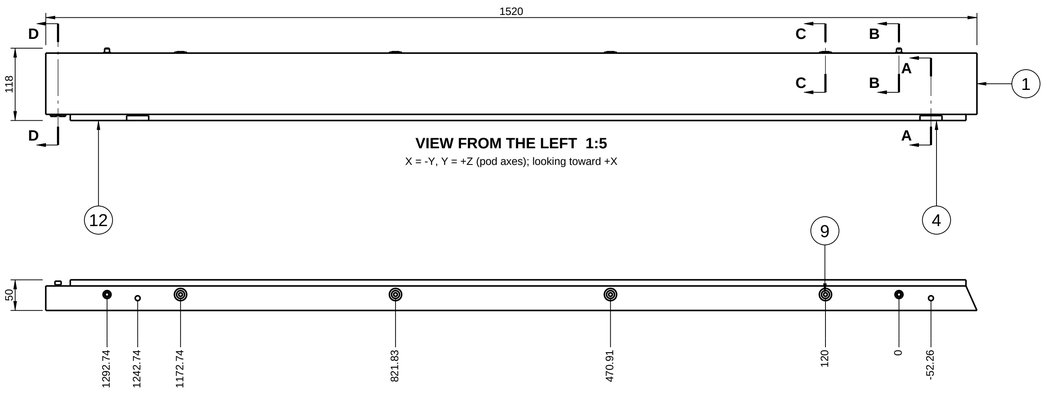


VIEW FROM THE LEFT 1:5

X = -Y, Y = +Z (pod axes); looking toward +X


VIEW FROM ABOVE 1:5

X = -Y, Y = +X (pod axes); looking down (toward -Z)

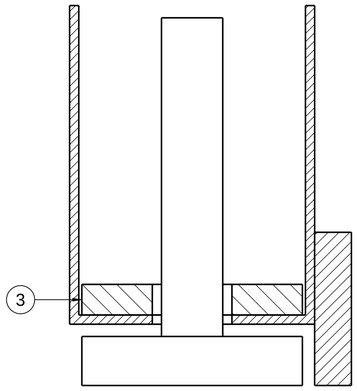


SECTION A-A 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

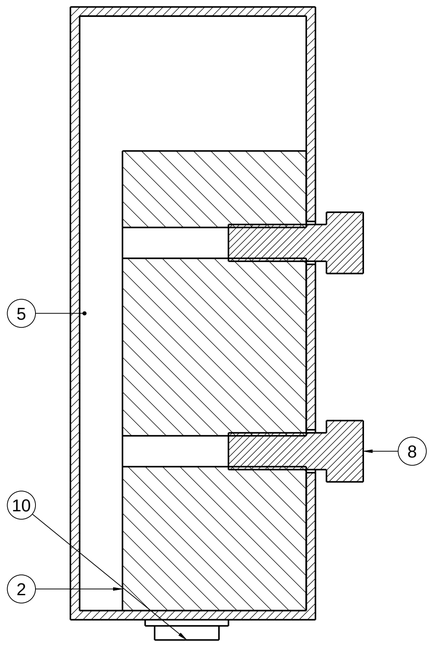


SECTION D-D 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION B-B 2:1

X = +X, Y = +Z (pod axes); looking toward +Y



SECTION C-C 2:1

X = +X, Y = +Z (pod axes); looking toward +Y

PARTS LIST: 110101 BASE - BAND ASSY - SIDE - LH

ITEM	PART NUMBER	NAME	QTY	MATERIAL	FINISH
1	111101	BASE - BAND TUBE - SIDE - LH	1	aluminium 6063-T6 rectangular tube 100 x 40 x 1.5 (PM ruling; alloy: assumption)	black anodised, matte, 20 um (class AA20, EN ISO 7599)
2	111211	BASE - CORNER KEY - SQUARE - COMMON	1	aluminium EN AW-6061 T6 block 30 x 35 x 75 (joints register J-BASE-02; sizes from the Joints Engineer 2026-11-01)	mill finish (hidden)
3	111601	BASE - GLIDE DOUBLER - COMMON	2	aluminium plate EN AW-6082 T6, 5 mm thick (PM ruling 2026-11-01)	mill finish (hidden inside the band, D-79)
4	118002	BASE - LEVELLING GLIDE - M10 - HOLD	2	levelling glide, M10 stem with a 5 mm hex socket on top, about 36 mm pad, static rating 3.5 kN or more (PM ruling 2026-11-01: the worst glide carries about 1.7 kN with two people leaning on one wall); base 6.5 mm or taller, so that screwed fully home against the M10 rivnut's head it holds the band at 8.5 mm: a hard stop (product HOLD)	-
5	118003	BASE - TUBE END CAP - 100 X 40 - BLACK - HOLD	1	flat end cap for the 100 x 40 x 1.5 tube's bore, black, no deeper than 2 (D-129; PE assumed, product HOLD)	black
6	831001	HARDWARE - LOCATING SPIGOT - M6 X Ø8 - STAINLESS	2	stainless steel A2 round bar, turned, M6 stud (assumption)	passivated stainless, bright (assumption)
7	831002	HARDWARE - STOP WASHER - Ø10.5 X Ø20 X 1.5 - AL	4	aluminium sheet 1.5, 5000 or 6000 series (joints register H-08)	mill finish (hidden)
8	838001	HARDWARE - SOCKET HEAD BOLT - M6 X 16 - ISO 4762 8.8 ZINC	2	steel, property class 8.8 (ISO 898-1)	zinc plated (ISO 4042)
9	838003	HARDWARE - RIVET NUT - M6 - STEEL ZINC - SHEREX CAH2-610-4.2	6	steel 1008/1010 (maker)	zinc plated, trivalent passivation (maker)
10	838010	HARDWARE - FLANGED BUTTON HEAD SCREW - M6 X 12 - ISO 7380-2 A2	2	stainless steel A2-70 (ISO 3506-1)	plain stainless, as supplied
11*	838006	HARDWARE - RIVET NUT - M10 - FOR THE LEVELLING GLIDE - HOLD	2	aluminium or steel (HOLD)	zinc plated steel or plain aluminium, with the product (HOLD)
12	118001	BASE - BASE SEAL - LIP - ROOM FLOOR - HOLD	1.462 m	soft lip (sweep) seal, EPDM or TPE, black: a leg bonded to the band's inner face and a fin reaching seal_reach (21.5) below the band's bottom, so it presses on the room floor across the glides' range (product HOLD)	black

NOTES

1. Parts, quantities, materials and finishes as the parts list 110000_P01_BASE_BOM.csv (its rows under 110101), word for word; each part's own drawing holds its sizes and tolerances.
2. Items marked * (11 838006) are not in the STEP 110000_P01_BASE_STEP.step P01: they have no balloon; their places are in their rows and the joints register.
3. Views in first angle (ISO 5456-2); each view title gives its X and Y in pod axes (guideline 3.3). Visible outlines only, as an assembly drawing shows them.
4. Interface sizes (ordinates, true mm from the STEP): VIEW FROM ABOVE: the spigot, rivnut and glide centres along the band, from the front spigot (datum B of 111101, joints register R-J6).
5. Fitted at the factory (D-87), in this order: the six M6 rivnuts 838003 set in the band's top face (torque HOLD-01), a stop washer 831002 under the head of each of the four J-BASE-01 bolt rivnuts (joints register H-08); the two spigots 831001 screwed into their rivnuts with threadlocker; the M10 rivnuts 838006 set through the band's bottom face and the 5 mm load blocks 111601 (grip 6.5, PM ruling 2026-11-01); the glides 118002 preset; the back corner key 111211 slid into the back end against the inner wall, its 2 hook stud bolts 838001 through the inner wall and its 2 fixing screws 838010 through the bottom wall (joints register J-BASE-02, D-129); the end cap 118003 in the back end; the lip 118001 bonded along the inner face (D-132) (BASE parts list notes).
6. TOLERANCE: the overall sizes are for reference; each part's drawing holds its own tolerances. Not ISO 2768.

PROJECT: **Spaceship (FocusPod v2)**	STATUS: **DRAFT**	DATE: 2026-11-01	SHEET: **1/1**
TITLE: **BASE - BAND ASSY - SIDE - LH** Viền chân nhôm - cạnh trái (cụm)			
PART NUMBER: **110101**	REV: **P01**	DRAWING NUMBER (FILE): **110101_P01_BASE-BAND-ASSY-SIDE-LH_DWG**	
MATERIAL: MATERIAL: see the parts list			
FINISH: FINISH: see the parts list			
SCALE: 1:5	SIZE: A1	UNITS: **UNITS: mm**	MASS: 2.4430 kg (calculation)
CREATED BY: Autonomous	APPROVED: not released	TOLERANCES: TOLERANCE: see the notes; not ISO 2768	
PROJECTION: ISO first angle (ISO 5456-2)			